

PRODUCT  
**CATALOGUE**

**2025**



**Srishti Lighting™**  
Lightening Happiness...



## About Us !

Srishti Lighting is a forward-thinking company specializing in LED lighting fixtures that seamlessly blend beauty, efficiency, and intelligence. What sets you apart is your evolution into the realm of enabling environments to adapt dynamically and intuitively. We believe in delivering high - quality, energy-efficient LED fixtures with precise color rendering and durable design.

We aim to transform spaces through light creating innovative, sustainable, and human-first illumination solutions that evolve with people's lives. LED (Light Emitting Diode) lighting is a highly energy-efficient lighting technology that has rapidly replaced traditional incandescent and fluorescent lights.

The adoption of LED lighting has been driven by sustainability goals, government energy mandates, and the rise of smart lighting systems. Unlike traditional bulbs, LEDs are compatible with motion sensors, dimmers, and automation systems, making them ideal for modern homes, offices, and urban infrastructure.

# Benefits Of LED Lights



## EFFICIENT ENERGY USAGE

LED Lights use 15% of electricity of a standard Halogen lamp.



## LIFE SPAN

The life span of LED PRODUCT is 8-10 times longer than standard bulbs.

LED Lights can last up to 50,000 hour over 8 times the lifespan of a Traditional Lights.



## FLEXIBLE DESIGN

LED Light Fixtures can be produced in a variety of shapes and sizes.



## SAFE NATURE

LED Lights save Nature and It does not have Mercury which are found in Traditional Lamps.



## DISPERSAL OF LIGHT

All LED Lighting is primarily designed to focus lights to a specific location or direction, without relying on an external reflector. This means it has higher degree of efficiency than conventional solutions.



## RAPID BRIGHTENING

All LED Lights turn on at 100% of their intended brightness every single time .

# SMART

## Lights



Control All Lights With  
One Touch

## Magnetic Adjustable Laser Blade



SL-MALB-295

Page No. 13

## Magnetic Movable Laser Blade



SL-MMLB-294

Page No. 14

## Magnetic Laser Blade



SL-MLB-291

Page No. 15

## Magnetic Laser Spot Light



SL-MLB-322

Page No. 16

## Magnetic Diffuser Laser Blade



SL-MDLB-292

Page No. 17

## Magnetic Track Spot



SL-MTL-290

Page No. 18



SL-MTL-293

## Magnetic Track Spot



SL-MTL-324

Page No. 19



SL-MTL-325

## Magnetic Track Patti



SL-MTP-296

Page No. 20



SL-SMTP-297

## Magnetic Track Accessories



SL-MTC-298



SL-MPC-304



SL-MSTC-301



SL-MTC-299



SL-MPSC-305



SL-MSTC-302



SL-MTC-300



SL-MSTC-303

# Down light Series

**CELER**



SL-DL-229/  
230/231

Page No. 23

**STELLA**



SL-DL-257

Page No. 24

**ANOSH**



SL-DL-232

Page No. 25

**LAZIO**



SL-DL-310

Page No. 26

**OLIVER**



SL-DL-261

Page No. 27

**BAKU**



SL-DL-279/  
280/281

Page No. 28

**RAAHI**



SL-DL-287

Page No. 29

**ENRICO**



SL-DL-197

Page No. 30

**RUBEN**



SL-DL-267

Page No. 31

**THEA**



SL-DL-207

Page No. 32

**ZORION**



SL-DL-85

Page No. 33

**VERDA**



SL-DL-260

Page No. 34

**ADORA**



SL-DL-244

Page No. 35

**MELBA**



SL-DL-254

Page No. 36

**TRIGO**



SL-DL-282

Page No. 37

**MARSH**



SL-DL-288

Page No. 38

**OWEN**



SL-DL-220

Page No. 39

**FLORIS**



SL-DL-269

Page No. 40

**FLORIS**



SL-DL-269

Page No. 40

**MADRID**



SL-DL-272

Page No. 41

**BARAK**



SL-DL-209

Page No. 42

**KOSTA**



SL-DL-161

Page No. 43

**NEO**



SL-DL-208

Page No. 44

**MINOS**



SL-DL-153

Page No. 45

**PENNIE**



SL-DL-219

Page No. 46

**LEXIS**



SL-DL-30

Page No. 47

**MYRA**



SL-DL-204

Page No. 48

**JERRY**



SL-DL-199

Page No. 49

**DORA**



SL-DL-200

Page No. 50

**TURIN**



SL-DL-308

Page No. 51

**CRUZ**



SL-DL-201/  
202/203

Page No. 52

**JASPER**



SL-DL-242

Page No. 53

**ROLLO**



SL-DL-243

Page No. 54

**GARISH**



SL-DL-289

Page No. 55

**SONET**



SL-DL-  
26/27/28/29

Page No. 56


**LEMOS**



SL-DL-314

Page No. 57


## Down light Series

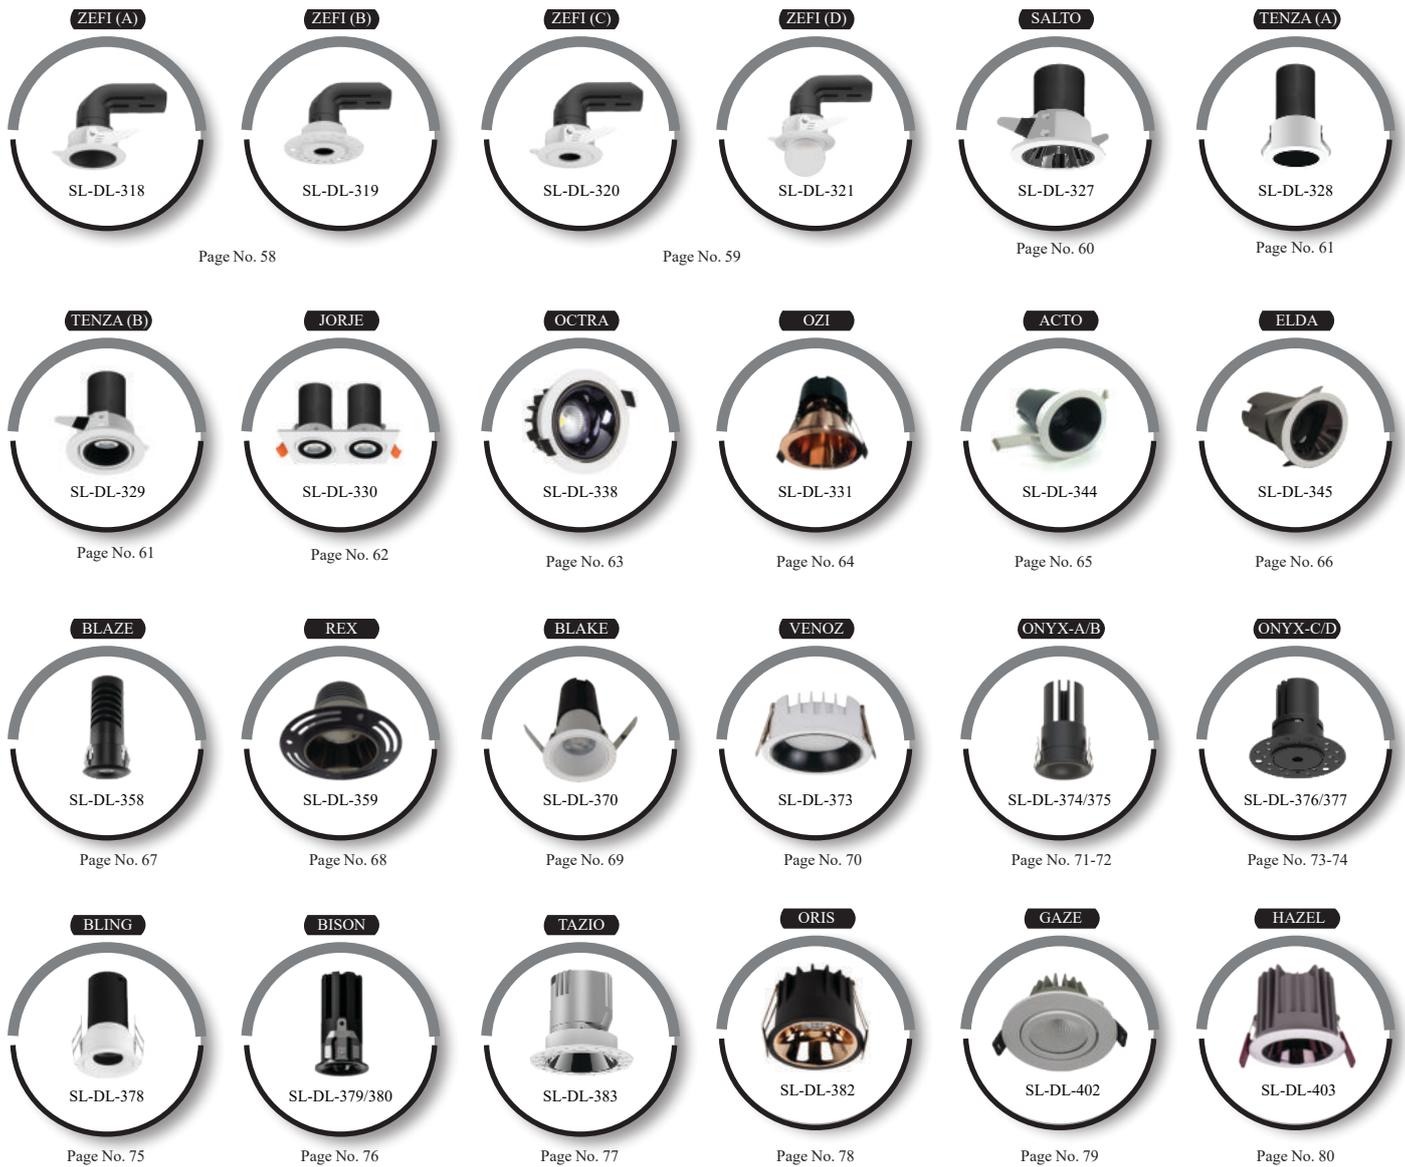

## Retrofit Lamp Series



## Laser Blade Series

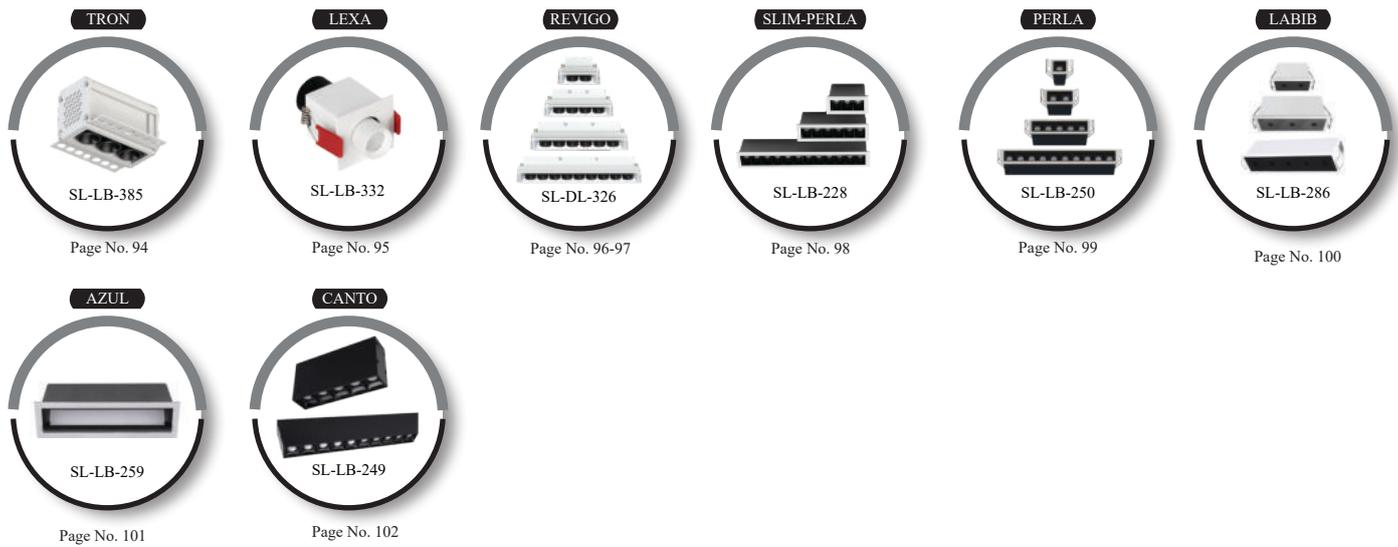

## Surface Down Light Series




## Zoom Light Series



## Wall Washer Series




## Track Spot Light Series

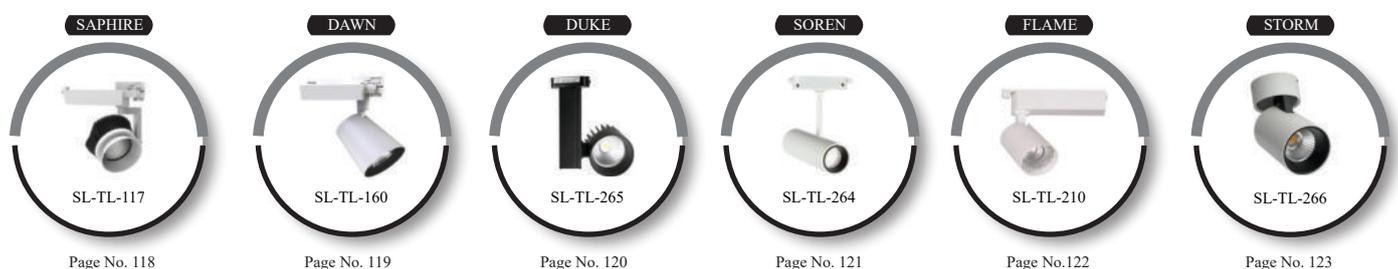




## Spot Light Series

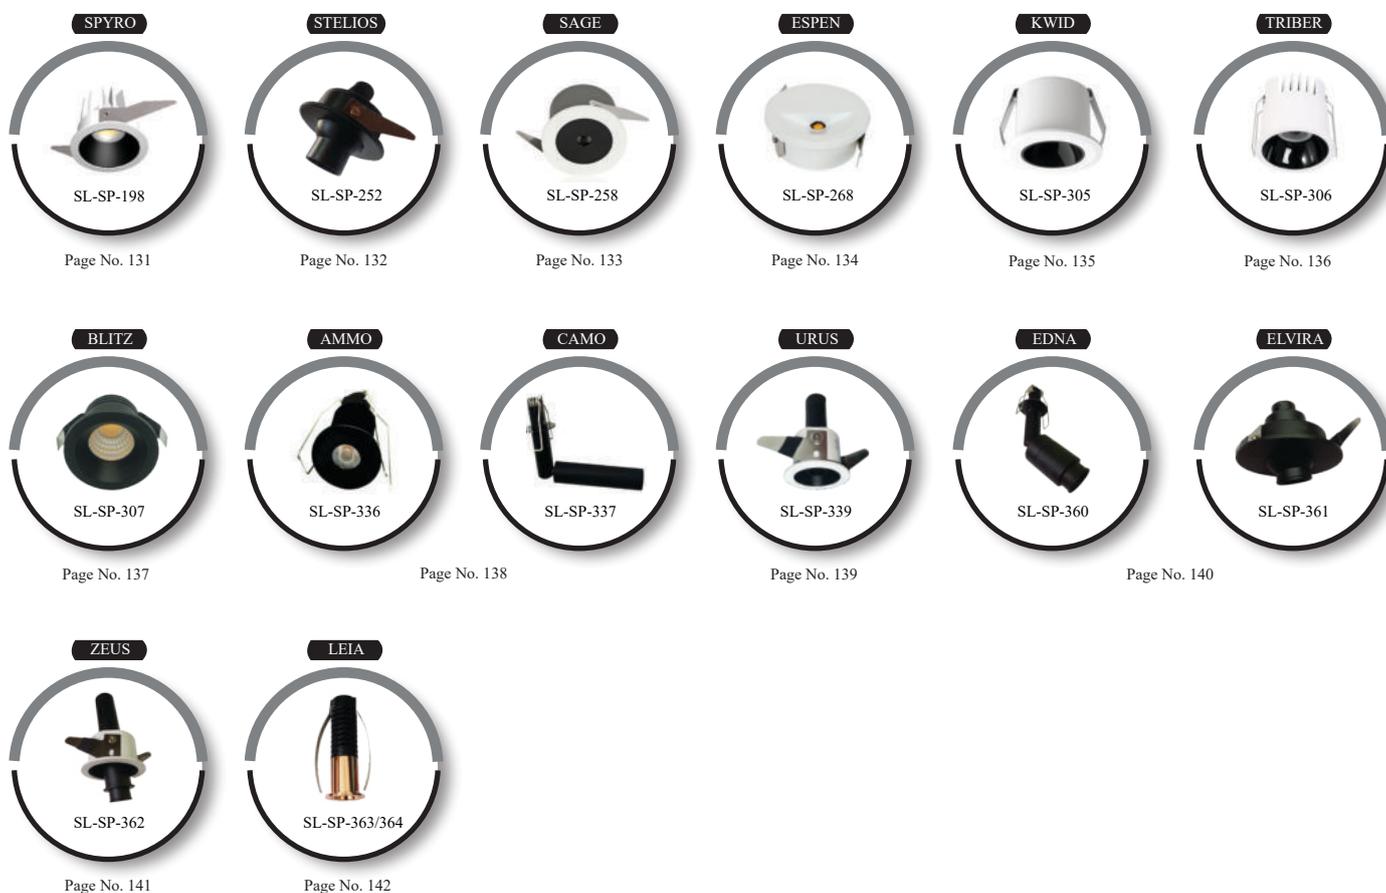

## Cabinet Light Series



## Strip Light Series




## Foot Light Series



## Jewellery Light Series



## Wall Light Series

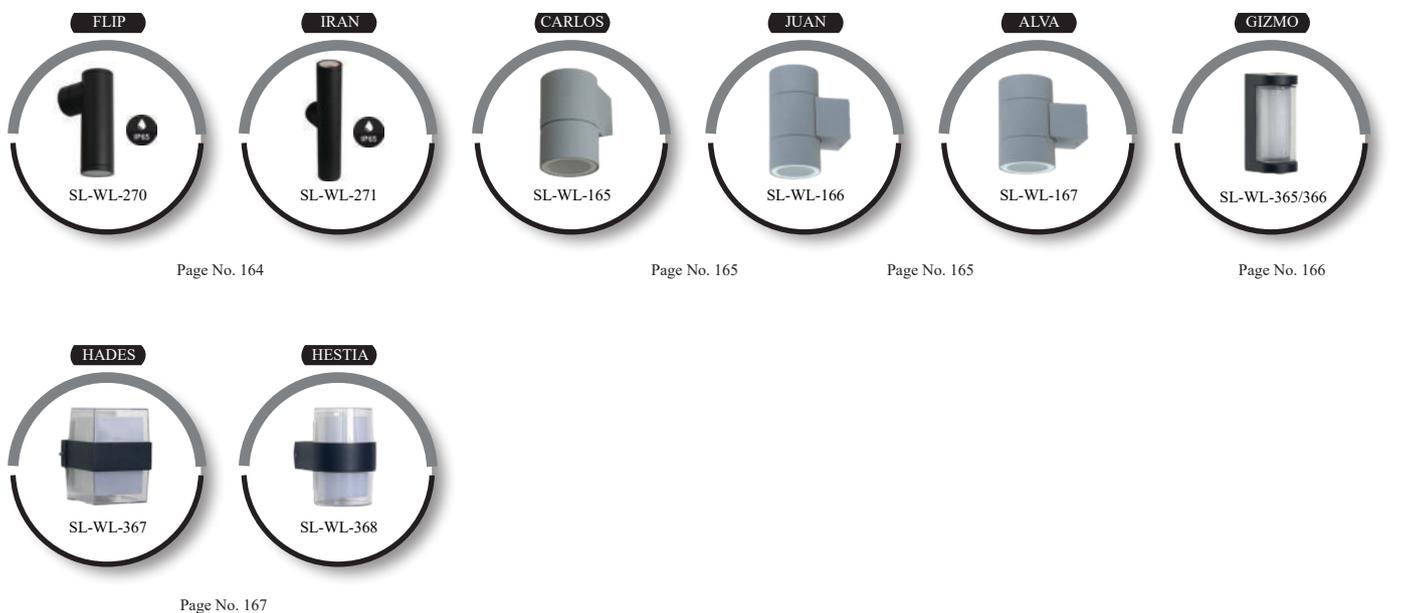

## Bollard Light Series



Page No. 169

## Inground Burials Light Series



Page No. 171

Page No. 172

## Spike Light Series




Page No. 174

## Spike/ WallWasher Light Series



Page No. 176


## Liner Profiles Series

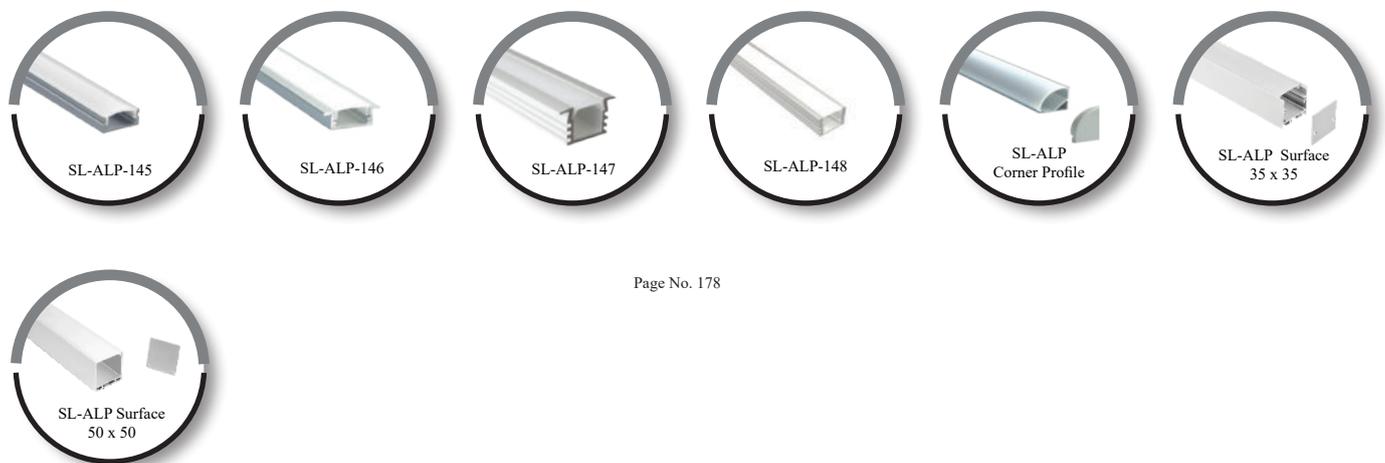

Page No. 178




## MR16 Housing Series

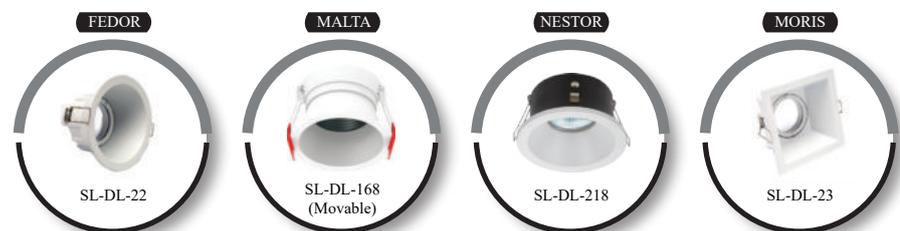

Page No. 180

## Track Accessories Series

---



Page No. 182

## Track Channel Series

---



Page No. 182

## Power Supplies Series

---



Waterproof

Page No. 184

## CCT-Controller & Amplifire


---



Page No. 184

## SMART Driver & Gateway

---




Page No. 185

The image shows a dark, modern interior wall composed of a grid of rectangular panels. A horizontal strip of recessed lighting runs along the top edge of the wall, with several small, bright lights visible. The overall atmosphere is sophisticated and minimalist.

RAVELLO MAGNETIC TRACK  
LIGHT SERIES

# MAGNETIC ADJUSTABLE LASER BLADE

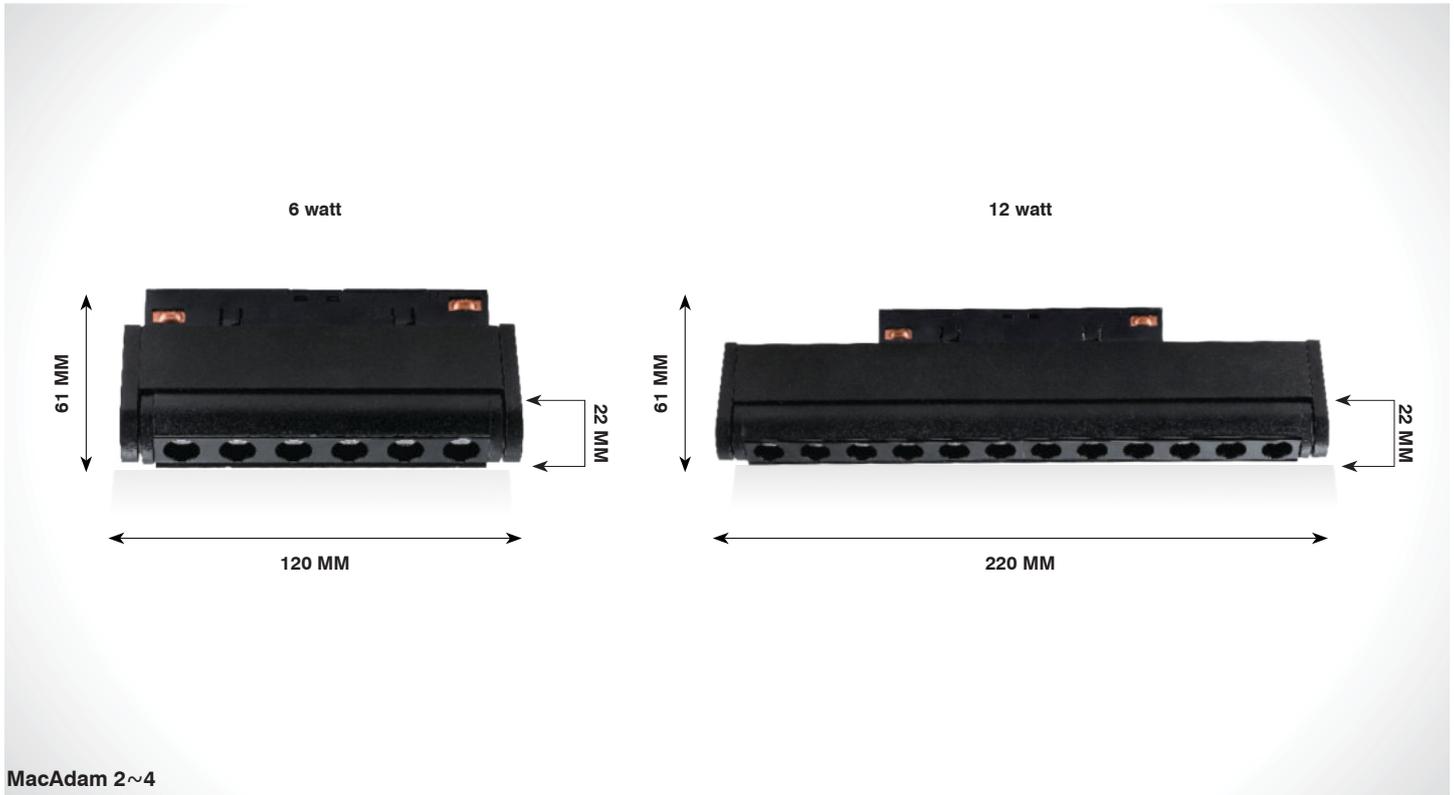


Available Body Colour : Black Body




Product Code	CRI	CCT	Dimension (in mm)			Lumen	Driver Opt	System Specs	
			Length	Width	Height			Housing	LED Make
SL-MALB-295-6w-S-W.WHT	80 / 90	3000K				660 lm	48VDC	Aluminium	
SL-MALB-295-6w-S-N.WHT		4000K	120	22	61	720 lm		Bridgelux	
SL-MALB-295-6w-S-WHT		6500K				750 lm			

Product Code	CRI	CCT	Dimension (in mm)			Lumen	Driver Opt	System Specs	
			Length	Width	Height			Housing	LED Make
SL-MALB-295-12w-S-W.WHT	80 / 90	3000K				1320 lm	48VDC	Aluminium	
SL-MALB-295-12w-S-N.WHT		4000K	220	22	61	1440 lm		Bridgelux	
SL-MALB-295-12w-S-WHT		6500K				1500 lm			

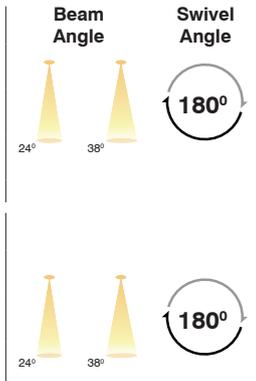

# MAGNETIC MOVABLE LASER BLADE

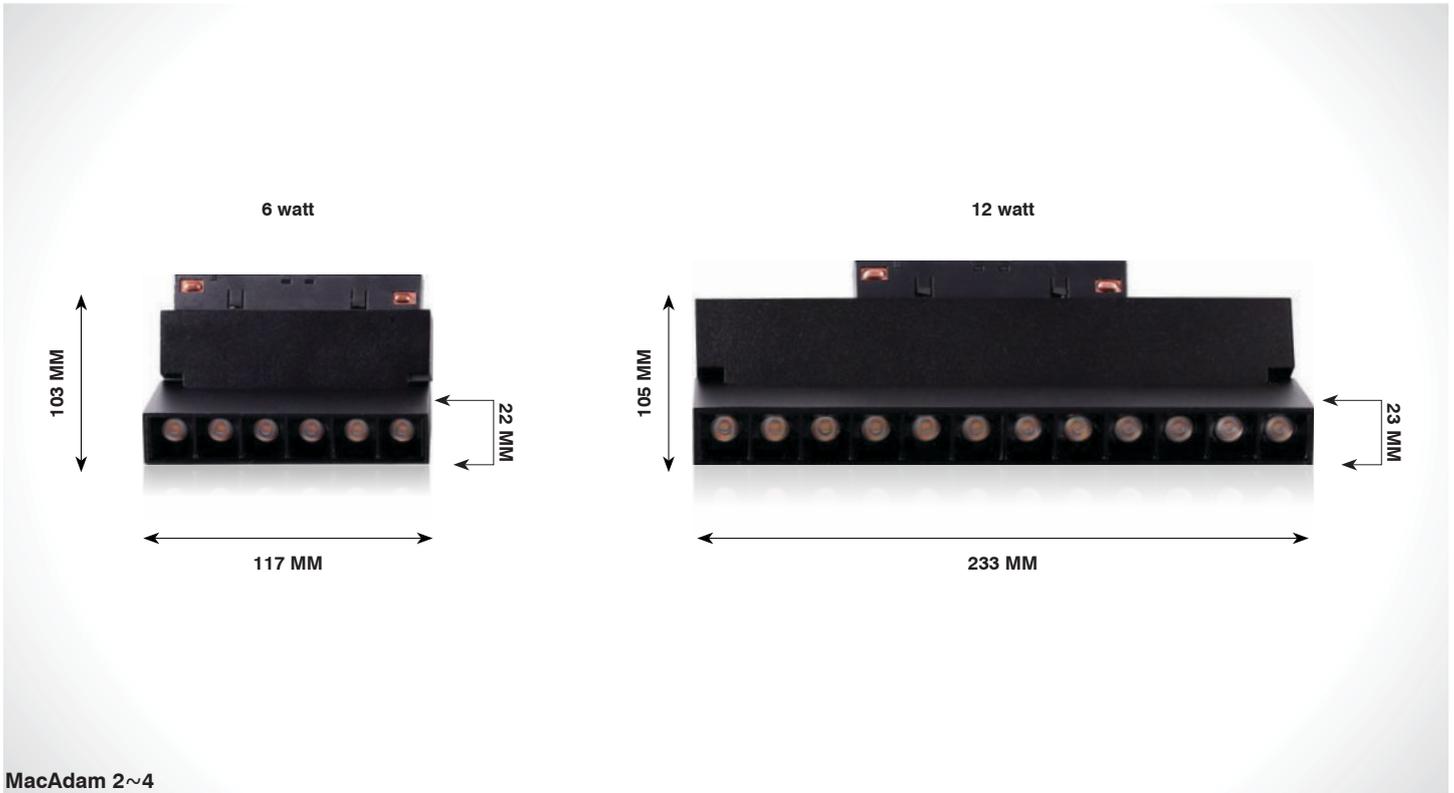


MacAdam 2~4


Available Body Colour : Black Body



Product Code	CRI	CCT	Dimension (in mm)			Lumen	Driver Opt	System Specs	
			Length	Width	Height			Housing	LED Make
SL-MMLB-294-6w-S-W.WHT	80 / 90	3000K	117	103	22	660 lm	48VDC	Aluminium	
SL-MMLB-294-6w-S-N.WHT		4000K				720 lm		Bridgelux	
SL-MMLB-294-6w-S-WHT		6500K				750 lm			




Product Code	CRI	CCT	Dimension (in mm)			Lumen	Driver Opt	System Specs	
			Length	Width	Height			Housing	LED Make
SL-MMLB-294-12w-S-W.WHT	80 / 90	3000K	233	105	23	1320 lm	48VDC	Aluminium	
SL-MMLB-294-12w-S-N.WHT		4000K				1440 lm		Bridgelux	
SL-MMLB-294-12w-S-WHT		6500K				1500 lm			



Also Available in Dali DT8 / DT6 / Tuya Smart

# MAGNETIC LASER BLADE

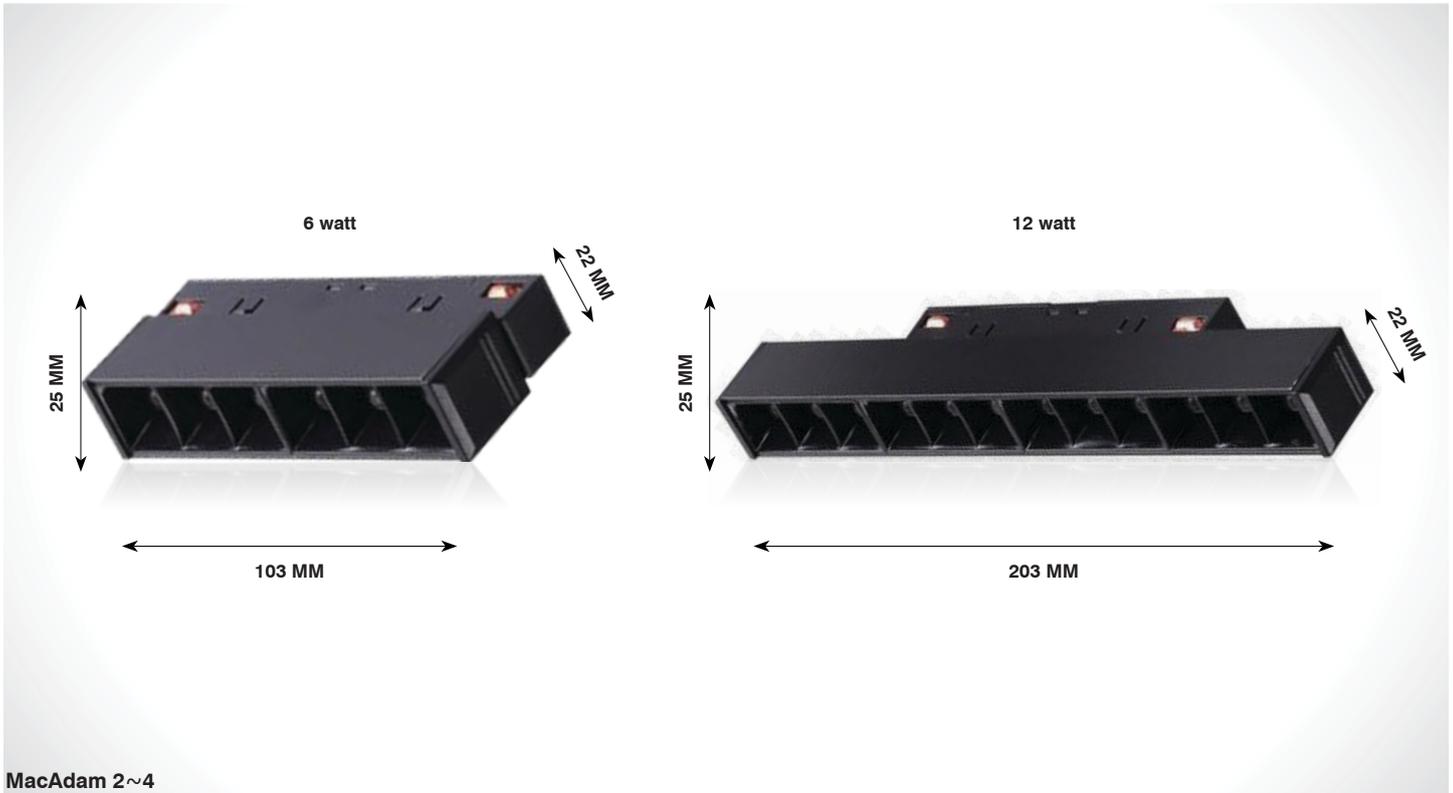

MacAdam 2~4


Available Body Colour : Black Body




Product Code	CRI	CCT	Dimension (in mm)			Lumen	Driver Opt	System Specs	
			Length	Width	Height			Housing	LED Make
SL-MLB-291-6w-S-W.WHT	80 / 90	3000K	103	25	22	660 lm	48VDC	Aluminium	
SL-MLB-291-6w-S-N.WHT		4000K				720 lm		Bridgelux	
SL-MLB-291-6w-S-WHT		6500K				750 lm			

Product Code	CRI	CCT	Dimension (in mm)			Lumen	Driver Opt	System Specs	
			Length	Width	Height			Housing	LED Make
SL-MLB-291-12w-S-W.WHT	80 / 90	3000K	203	25	22	1320 lm	48VDC	Aluminium	
SL-MLB-291-12w-S-N.WHT		4000K				1440 lm		Bridgelux	
SL-MLB-291-12w-S-WHT		6500K				1500 lm			





# MAGNETIC LASER SPOT LIGHT

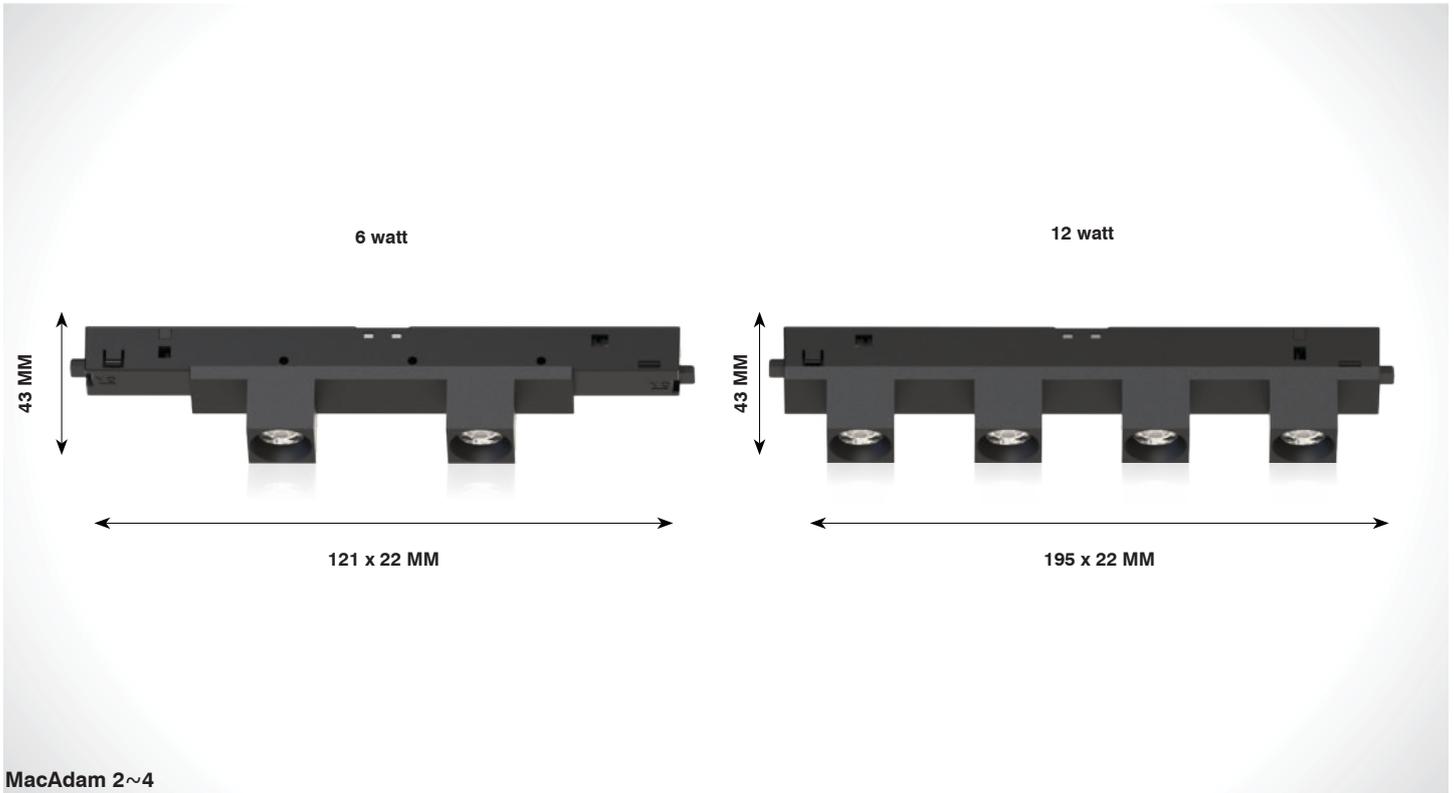

Available Body Colour : Black Body

Product Code	CRI	CCT	Dimension (in mm)			Lumen	Driver Opt	System Specs	
			Lenght	Width	Height			Housing	LED Make
SL-MTL-322-6w-R-W.WHT	80 / 90	3000K				660 lm	48V DC	Aluminium	
SL-MTL-322-6w-R-N.WHT		4000K	121	22	43	720 lm		Cree / Osram	
SL-MTL-322-6w-R-WHT		6500K				750 lm		Meanwell / KG	
SL-MTL-323-12w-R-W.WHT	80 / 90	3000K				1320 lm	48V DC	Aluminium	
SL-MTL-323-12w-R-N.WHT		4000K	195	22	43	1440 lm		Cree / Osram	
SL-MTL-323-12w-R-WHT		6500K				1500 lm		Meanwell / KG	


### Beam Angle



### Application



# MAGNETIC DIFFUSER LASER BLADE

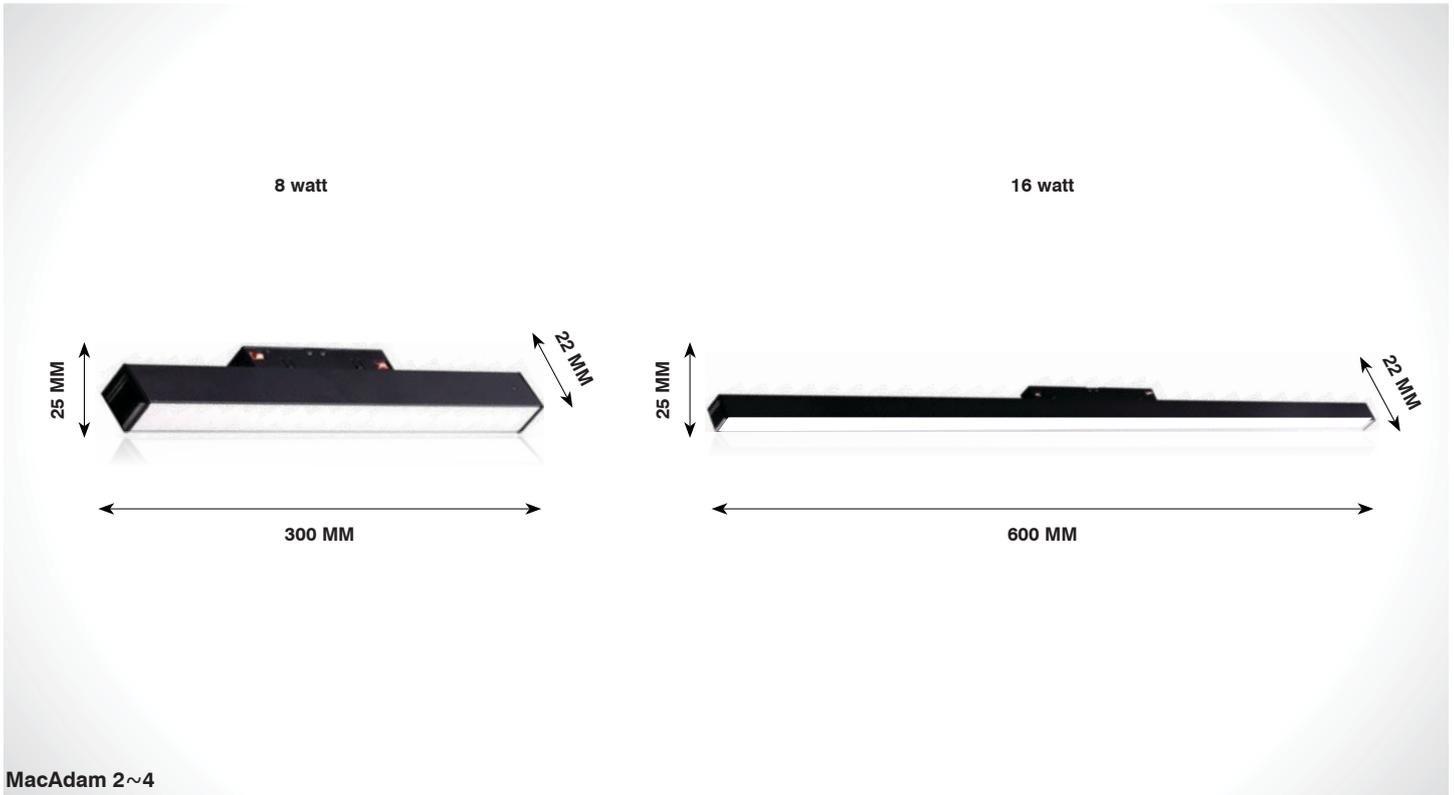

MacAdam 2~4

Available Body Colour : Black Body



Product Code	CRI	CCT	Dimension (in mm)			Lumen	Driver Opt	System Specs	
SL-MDLB-292-8w-S-W.WHT	80 / 90	3000K	Length	Width	Height	880 lm	48VDC	<b>Housing</b>	Aluminium
SL-MDLB-292-8w-S-N.WHT		4000K	300	25	22	960 lm		<b>LED Make</b>	Bridgelux
SL-MDLB-292-8w-S-WHT		6500K				1000 lm			

Product Code	CRI	CCT	Dimension (in mm)			Lumen	Driver Opt	System Specs	
SL-MDLB-292-16w-S-W.WHT	80 / 90	3000K	Length	Width	Height	1760 lm	48VDC	<b>Housing</b>	Aluminium
SL-MDLB-292-16w-S-N.WHT		4000K	600	25	22	1920 lm		<b>LED Make</b>	Bridgelux
SL-MDLB-292-16w-S-WHT		6500K				2000 lm			

Beam Angle




110°



110°


# MAGNETIC TRACK SPOT

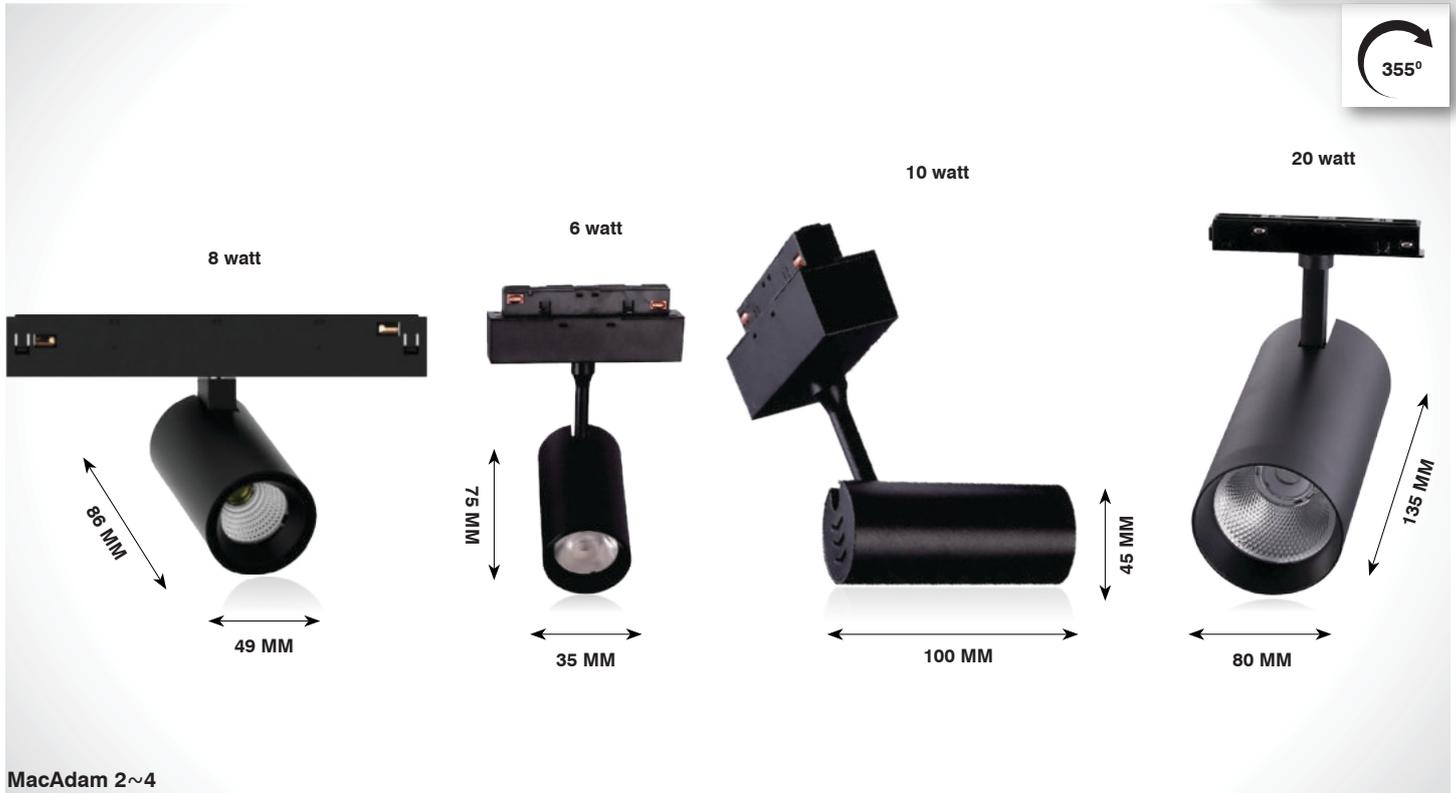


Available Body Colour : Black Body




Product Code	CRI	CCT	Dimension (in mm)		Lumen	Driver Opt	System Specs	
SL-MTL-290-8w-R-W.WHT	80 / 90	3000K	Length	Diameter	880 lm	48VDC	<b>Housing</b>	Aluminium
SL-MTL-290-8w-R-N.WHT		4000K	86	49	960 lm		<b>LED Make</b>	Cree / Bridgelux
SL-MTL-290-8w-R-WHT		6500K			1000 lm			




Product Code	CRI	CCT	Dimension (in mm)		Lumen	Driver Opt	System Specs	
SL-MTL-293-6w-R-W.WHT	80 / 90	3000K	Length	Diameter	660 lm	48VDC	<b>Housing</b>	Aluminium
SL-MTL-293-6w-R-N.WHT		4000K	75	35	720 lm		<b>LED Make</b>	Cree / Bridgelux
SL-MTL-293-6w-R-WHT		6500K			750 lm			



Product Code	CRI	CCT	Dimension (in mm)		Lumen	Driver Opt	System Specs	
SL-MTL-293-10w-R-W.WHT	80 / 90	3000K	Length	Diameter	1100 lm	48VDC	<b>Housing</b>	Aluminium
SL-MTL-293-10w-R-N.WHT		4000K	100	45	1200 lm		<b>LED Make</b>	Cree / Bridgelux
SL-MTL-293-10w-R-WHT		6500K			1250 lm			



Product Code	CRI	CCT	Dimension (in mm)		Lumen	Driver Opt	System Specs	
SL-MTL-293-20w-R-W.WHT	80 / 90	3000K	Length	Diameter	2200 lm	48VDC	<b>Housing</b>	Aluminium
SL-MTL-293-20w-R-N.WHT		4000K	135	80	2400 lm		<b>LED Make</b>	Cree / Bridgelux
SL-MTL-293-20w-R-WHT		6500K			2500 lm			



**Application**

Also Available in Dali DT8 / DT6 / Tuya Smart





# MAGNETIC TRACK SPOT LIGHT



Available Body Colour : Black Body  
Body Shape : Slim

Product Code	CRI	CCT	Dimension (in mm)		Lumen	Driver Opt	System Specs	
SL-MTL-324-6w-R-W.WHT	80 / 90	3000K	Diameter	Height	660 lm	48V DC	<b>Housing</b>	Aluminium
SL-MTL-324-6w-R-N.WHT		4000K	83 x 25	128	720 lm		<b>LED Make</b>	Cree / Osram
SL-MTL-324-6w-R-WHT		6500K			750 lm		<b>Driver Brands</b>	Meanwell
SL-MTL-325-12w-R-W.WHT	80 / 90	3000K	Diameter	Height	1320 lm	48V DC	<b>Housing</b>	Aluminium
SL-MTL-325-12w-R-N.WHT		4000K	83 x 25	128	1440 lm		<b>LED Make</b>	Cree / Osram
SL-MTL-325-12w-R-WHT		6500K			1500 lm		<b>Driver Brands</b>	Meanwell


### Beam Angle



### Application



## MAGNETIC TRACK PATTI

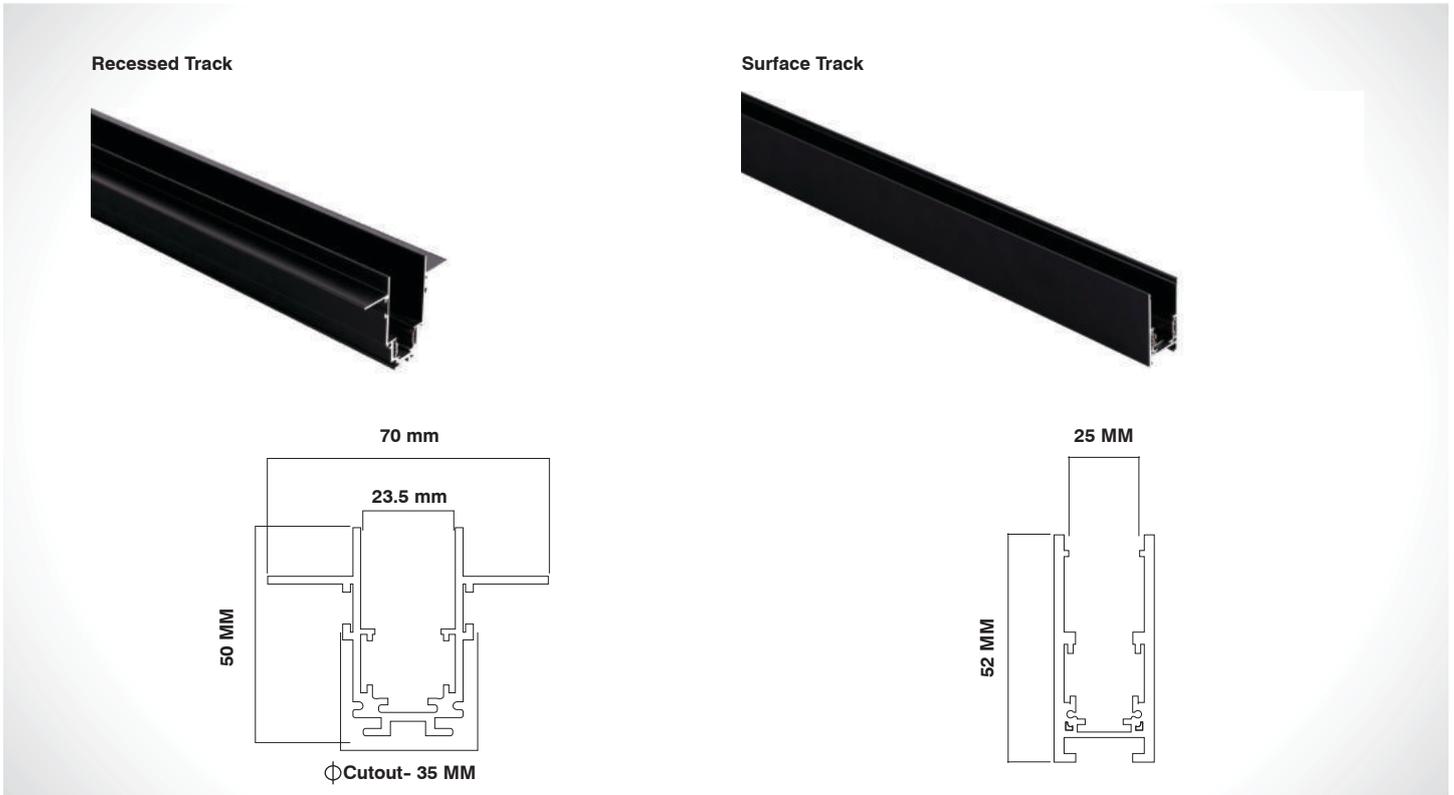

Product Code	Dimension (in mm)			
	Length	Width	Height	Cutout
SL-MTP-296-Recessed - 1 mtr	1000	70	50	⌀ 35
SL-MTP-296-Recessed - 2 mtr	2000	70	50	⌀ 35
SL-SMTP-297-Surface - 1 mtr	1000	25	52	
SL-SMTP-297-Surface - 2 mtr	2000	25	52	

### Application



## MAGNETIC TRACK ACCESSORIES

**Recessed**



**SL-MTC-298 - L Connector**



**SL-MTC-299 - T Connector**



**SL-MTC-300 - I Connector**

**Power Connector**



**SL-MPC - 304**



**SL-MPSC - 305  
Power Series Connector**



**Non Dimmable Power  
Supply - Meanwell  
( 48VDC )**



**SL-MDR-317-100w  
SL-MDR-318-150w**

**Surface**



**SL-MSTC-301 - L Connector**



**SL-MSTC-302 - T Connector**



**SL-MSTC-303 - I Connector**



DOWN LIGHT SERIES

## DOWN LIGHT






## C E L E R




Product Code	CRI	CCT	Dimension (in mm)			Lumen	Driver Opt	System Specs	
			Diameter	Height	Cutout			Housing	Aluminium
SL-DL-229-7w-R-W.WHT	80 / 90	3000K				770 lm	36-42V@150mA	LED Make	Cree / Bridgelux
SL-DL-229-7w-R-N.WHT		4000K	39	59	$\phi$ 33	840 lm		Driver Brands	Fulham / Philips / Bag
SL-DL-229-7w-R-WHT		6500K				875 lm		Dimming	Triac / 0-10v / Dali
SL-DL-230-14w-R-W.WHT	80 / 90	3000K				1540 lm	36-42V@300mA	Housing	Aluminium
SL-DL-230-14w-R-N.WHT		4000K	58	70	$\phi$ 52	1680 lm		LED Make	Cree / Bridgelux
SL-DL-230-14w-R-WHT		6500K				1750 lm		Driver Brands	Fulham / Philips / Bag
								Dimming	Triac / 0-10v / Dali
SL-DL-231-18w-R-W.WHT	80 / 90	3000K				1980 lm	36-42V@400mA	Housing	Aluminium
SL-DL-231-18w-R-N.WHT		4000K	75	85	$\phi$ 65	2160 lm		LED Make	Cree / Bridgelux
SL-DL-231-18w-R-WHT		6500K				2250 lm		Driver Brands	Fulham
								Dimming	Triac / 0-10v / Dali

### Beam Angle



## DOWN LIGHT

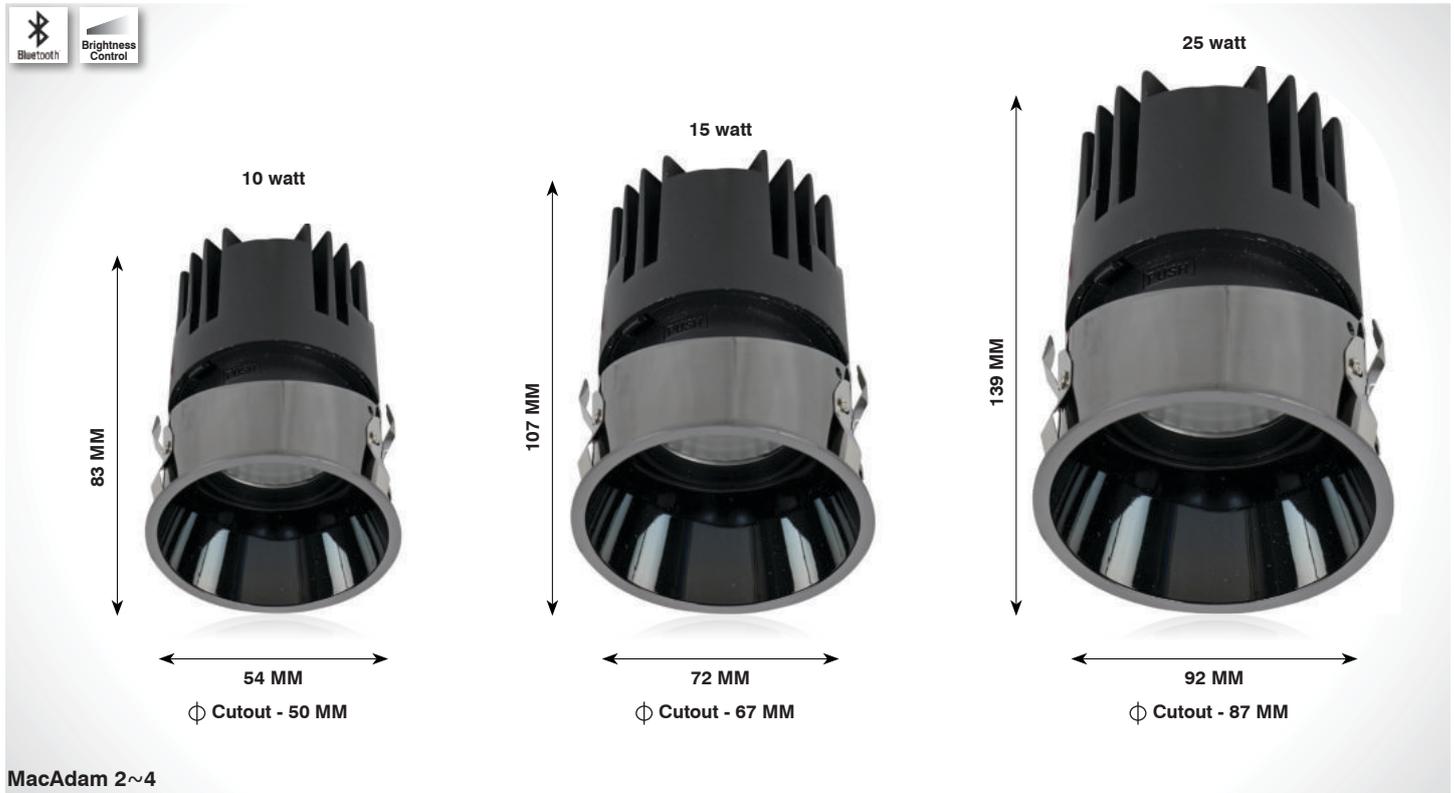


MacAdam 2~4

## STELLA




Product Code	CRI	CCT	Dimension (in mm)			Lumen	Driver Opt	System Specs	
			Diameter	Height	Cutout			Housing	Aluminium
SL-DL-257-10w-R-W.WHT	80 / 90	3000K	54	83	φ 50	1200 lm	36-42V@200mA	<b>LED Make</b>	Cree / Bridgelux
SL-DL-257-10w-R-N.WHT		4000K				1250 lm		<b>Driver Brands</b>	Fulham / Philips / Bag
SL-DL-257-10w-R-WHT		6500K						<b>Dimming</b>	Triac / 0-10v / Dali
SL-DL-257-15w-R-W.WHT	80 / 90	3000K	72	107	φ 67	1800 lm	36-42V@350mA	<b>Housing</b>	Aluminium
SL-DL-257-15w-R-N.WHT		4000K				1875 lm		<b>LED Make</b>	Cree / Bridgelux
SL-DL-257-15w-R-WHT		6500K						<b>Driver Brands</b>	Fulham / Philips / Bag
								<b>Dimming</b>	Triac / 0-10v / Dali
SL-DL-257-25w-R-W.WHT	80 / 90	3000K	92	139	φ 87	3000 lm	36-42V@700 mA	<b>Housing</b>	Aluminium
SL-DL-257-25w-R-N.WHT		4000K				3125 lm		<b>LED Make</b>	Cree / Bridgelux
SL-DL-257-25w-R-WHT		6500K						<b>Driver Brands</b>	Fulham
								<b>Dimming</b>	Triac / 0-10v / Dali

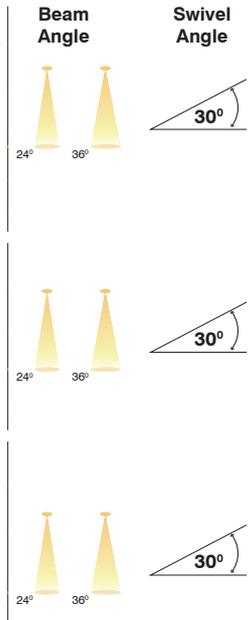

On request also available in CCT - 2700K / 3500K / 5000K , CRI - 95+  
Also Available in Dali DT8 / DT6 / Tuya Smart

# DOWN LIGHT

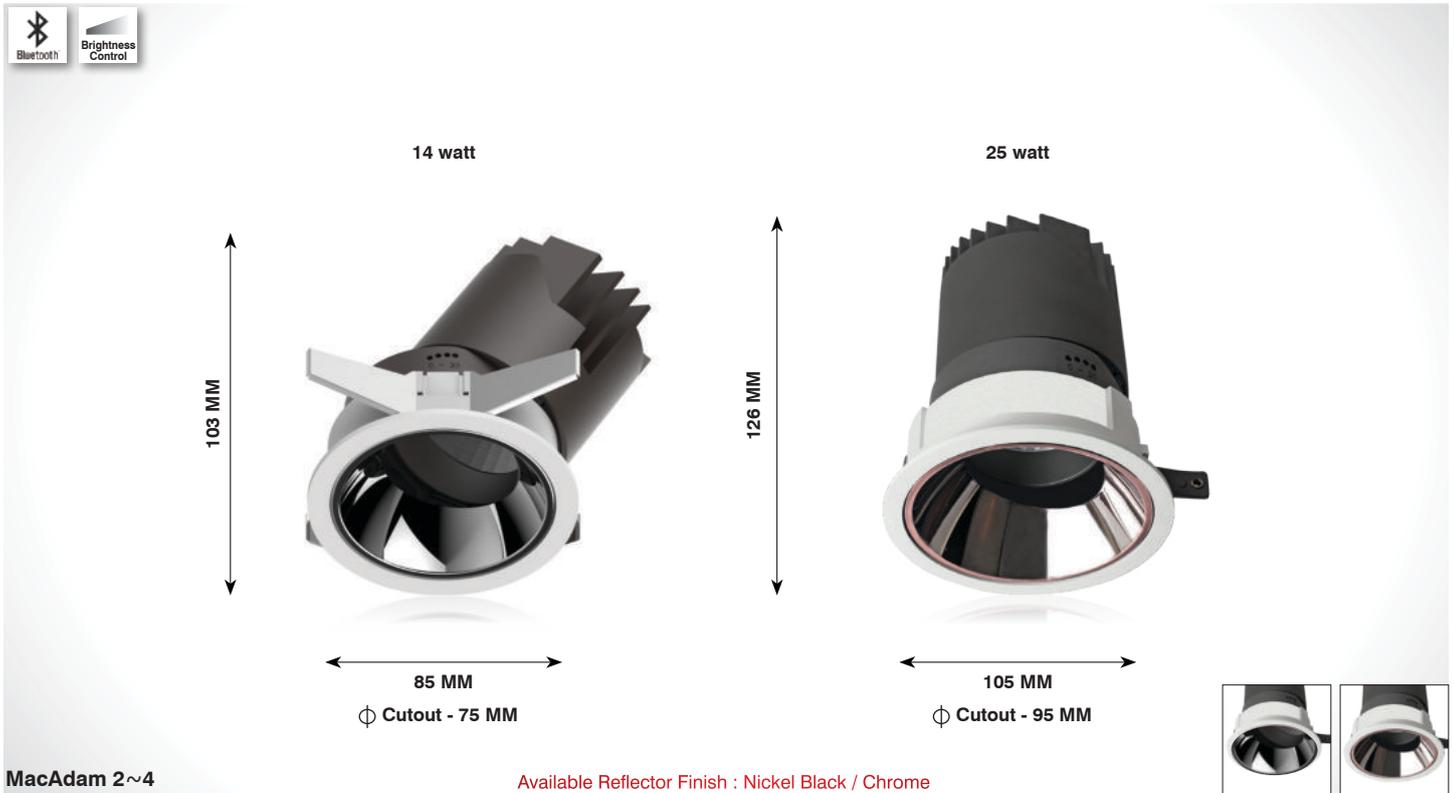


# ANOSH

Front Removable



Product Code	CRI	CCT	Dimension (in mm)			Lumen	Driver Opt	System Specs		Beam Angle	Swivel Angle	
			Diameter	Height	Cutout			Housing	LED Make			Driver Brands
SL-DL-232-14w-R-W.WHT	80 / 90	3000K	85	103	φ75	1540 lm	36-42V@300 mA	Aluminium	Cree / Bridgelux	Fulham / Philips / Bag	Triac / 0-10v / Dali	
SL-DL-232-14w-R-N.WHT		4000K				1680 lm						
SL-DL-232-14w-R-WHT		6500K				1750 lm						
SL-DL-232-25w-R-W.WHT	80 / 90	3000K	105	126	φ95	2750 lm	36-42V@700 mA	Aluminium	Cree / Bridgelux	Fulham	Triac / 0-10v / Dali	
SL-DL-232-25w-R-N.WHT		4000K				3000 lm						
SL-DL-232-25w-R-WHT		6500K				3125 lm						

# DOWN LIGHT

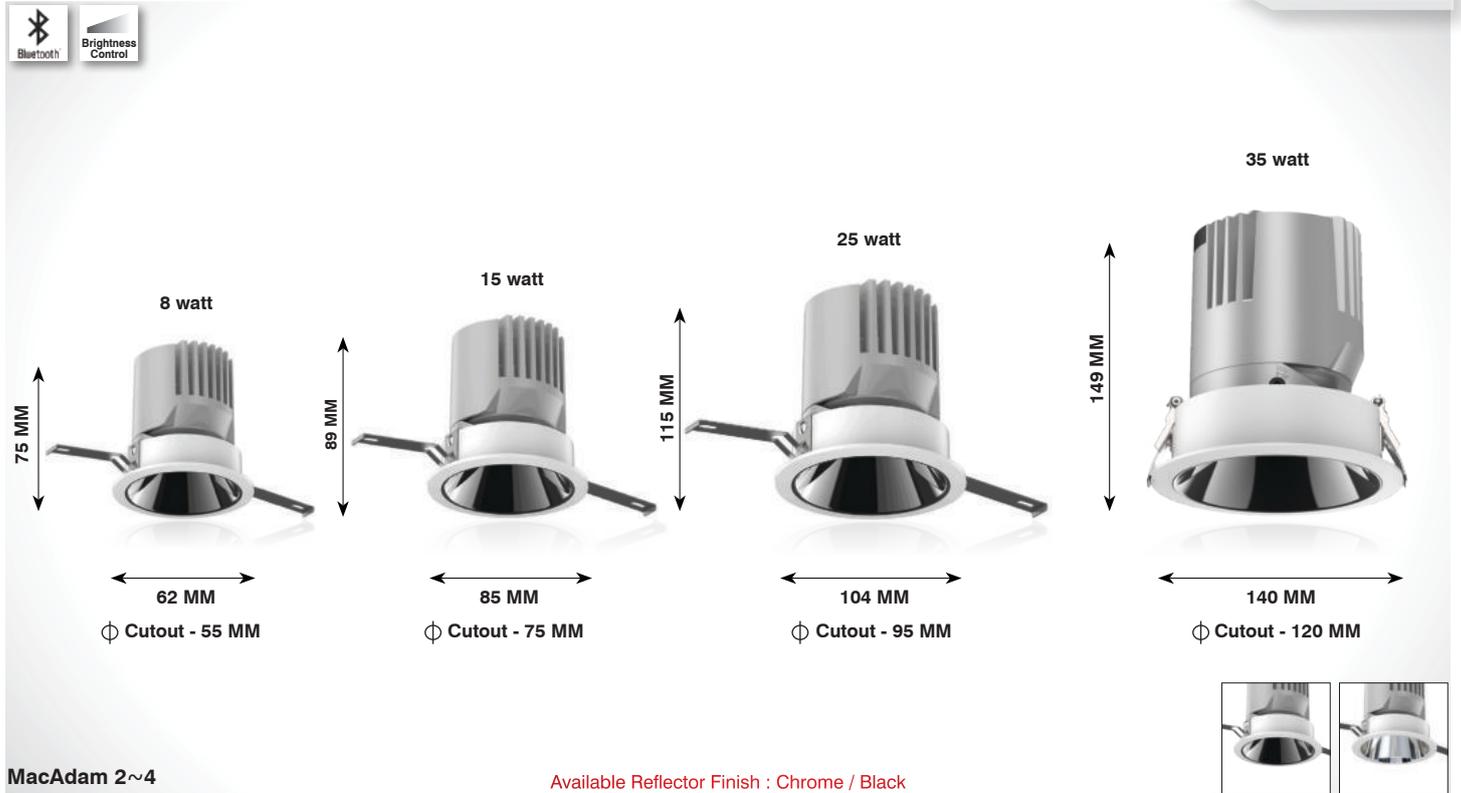


# LAZIO

Front Removable




Product Code	CRI	CCT	Dimension (in mm)			Lumen	Driver Opt	System Specs	
SL-DL-310-8w-R-W.WHT	80 / 90	3000K	Diameter	Height	Cutout	880 lm	36-42V@200mA	<b>Housing</b>	Aluminium
SL-DL-310-8w-R-N.WHT		4000K	62	75	φ55	960 lm		<b>LED Make</b>	Cree / Bridgelux
SL-DL-310-8w-R-WHT		6500K				1000 lm		<b>Driver Brands</b>	Fulham / Philips / Osram
								<b>Dimming</b>	Triac / 0-10v / Dali
SL-DL-310-15w-R-W.WHT	80 / 90	3000K	Diameter	Height	Cutout	1650 lm	36-42V@350mA	<b>Housing</b>	Aluminium
SL-DL-310-15w-R-N.WHT		4000K	85	89	φ75	1800 lm		<b>LED Make</b>	Cree / Bridgelux
SL-DL-310-15w-R-WHT		6500K				1875 lm		<b>Driver Brands</b>	Fulham / Philips / Osram
								<b>Dimming</b>	Triac / 0-10v / Dali
SL-DL-310-25w-R-W.WHT	80 / 90	3000K	Diameter	Height	Cutout	2750 lm	36-42V@700mA	<b>Housing</b>	Aluminium
SL-DL-310-25w-R-N.WHT		4000K	104	115	φ95	3000 lm		<b>LED Make</b>	Cree / Bridgelux
SL-DL-310-25w-R-WHT		6500K				3125 lm		<b>Driver Brands</b>	Fulham / Osram
								<b>Dimming</b>	Triac / 0-10v / Dali
SL-DL-310-35w-R-W.WHT	80 / 90	3000K	Diameter	Height	Cutout	3850 lm	36-42V@850mA	<b>Housing</b>	Aluminium
SL-DL-310-35w-R-N.WHT		4000K	140	149	φ120	4200 lm		<b>LED Make</b>	Cree / Bridgelux
SL-DL-310-35w-R-WHT		6500K				4375 lm		<b>Driver Brands</b>	Fulham / Osram
								<b>Dimming</b>	Triac / 0-10v / Dali

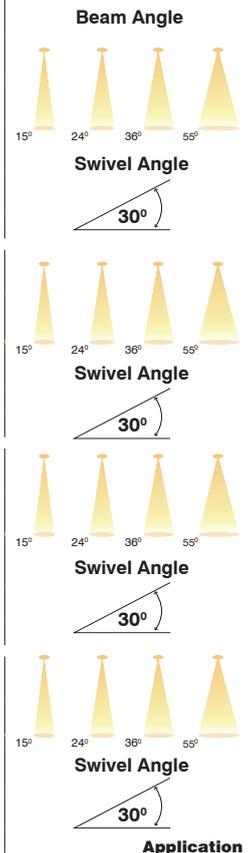

On request also available in CCT - 2700K / 3500K / 5000K , CRI - 95+  
Also Available in Dali DT8 / DT6 / Tuya Smart

## DOWN LIGHT



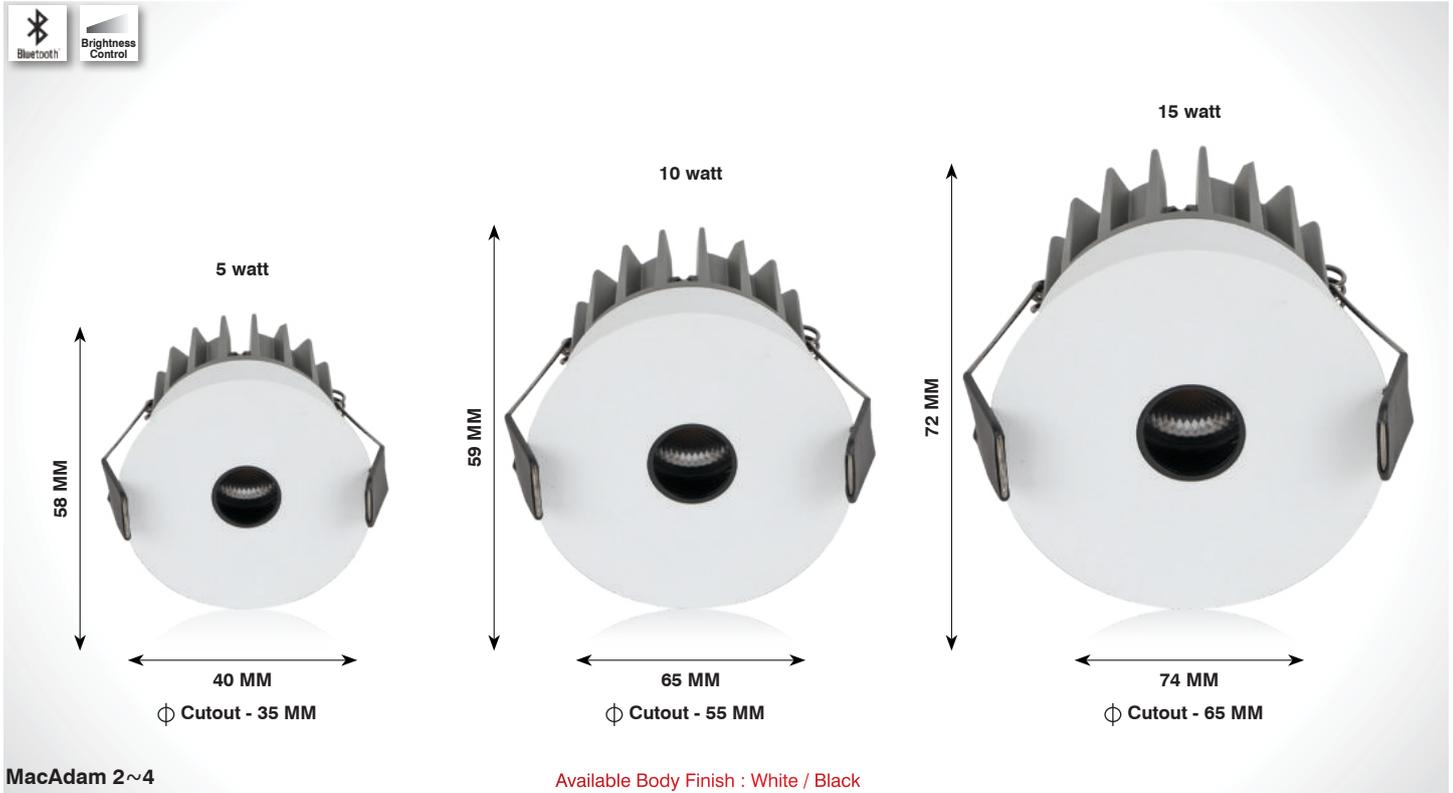


## OLIVER



Product Code	CRI	CCT	Dimension (in mm)			Lumen	Driver Opt	System Specs	
			Diameter	Height	Cutout			Housing	Aluminium
SL-DL-261-5w-R-W.WHT	80 / 90	3000K	40	58	⌀35	550 lm	2-4V@1000mA	<b>LED Make</b>	Bridgelux
SL-DL-261-5w-R-N.WHT		4000K				600 lm		<b>Driver Brands</b>	Srishti
SL-DL-261-5w-R-WHT		6500K				625 lm		<b>Dimming</b>	Triac / 0-10v / Dali
SL-DL-261-10w-R-W.WHT	80 / 90	3000K	65	59	⌀55	1100 lm	36-42V@200mA	<b>Housing</b>	Aluminium
SL-DL-261-10w-R-N.WHT		4000K				1200 lm		<b>LED Make</b>	Bridgelux
SL-DL-261-10w-R-WHT		6500K				1250 lm		<b>Driver Brands</b>	Philips / Bag
								<b>Dimming</b>	Triac / 0-10v / Dali
SL-DL-261-15w-R-W.WHT	80 / 90	3000K	74	72	⌀65	1650 lm	36-42V@350mA	<b>Housing</b>	Aluminium
SL-DL-261-15w-R-N.WHT		4000K				1800 lm		<b>LED Make</b>	Bridgelux
SL-DL-261-15w-R-WHT		6500K				1875 lm		<b>Driver Brands</b>	Fulham / Bag
								<b>Dimming</b>	Triac / 0-10v / Dali

### Beam Angle




On request also available in CCT - 2700K / 3500K / 5000K , CRI - 95+  
Also Available in Dali DT8 / DT6 / Tuya Smart

### Application



## DOWN LIGHT

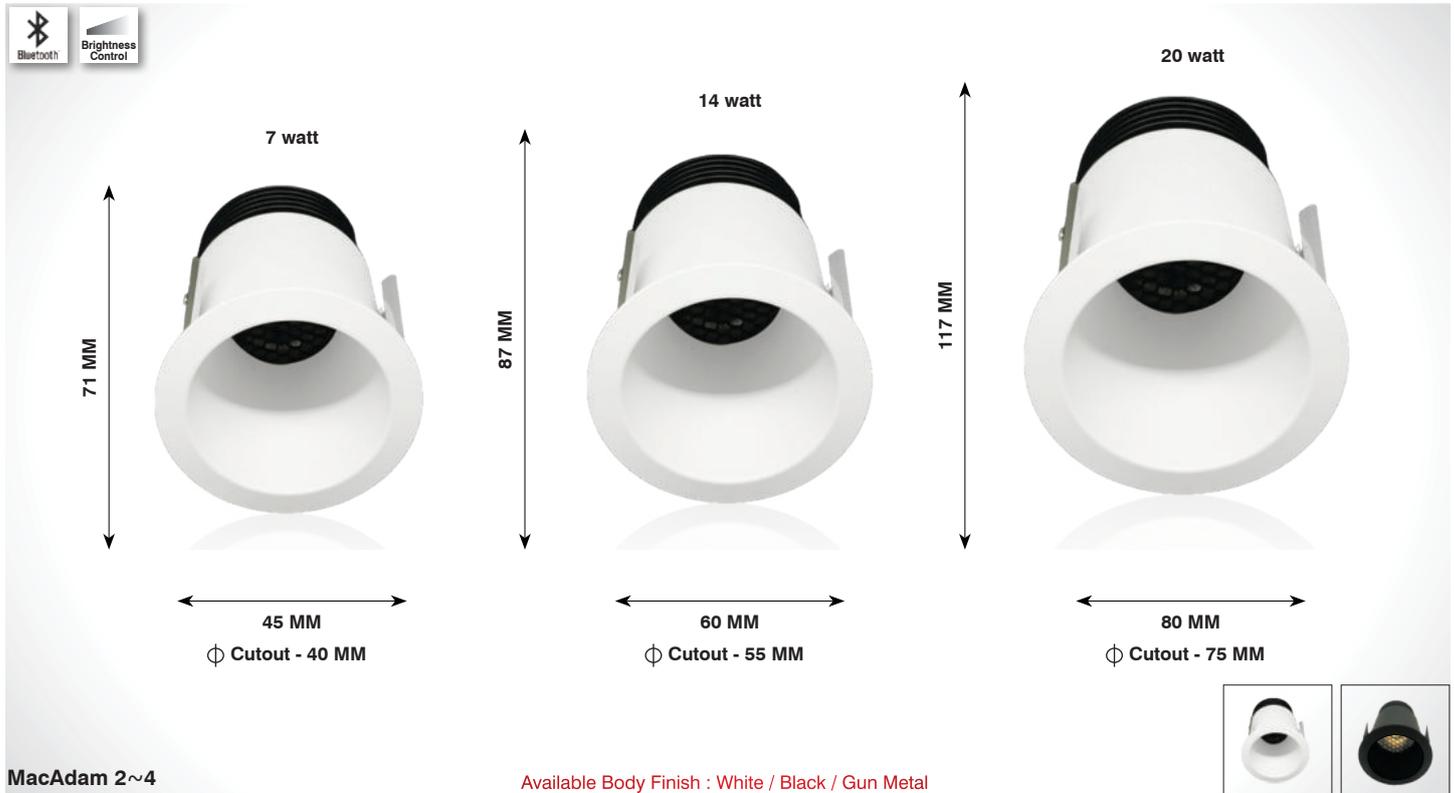

MacAdam 2~4




Available Body Finish : White / Black / Gun Metal

## BAKU




Product Code	CRI	CCT	Dimension (in mm)			Lumen	Driver Opt	System Specs	
			Diameter	Height	Cutout			Housing	
SL-DL-279-7w-R-W.WHT	80 / 90	3000K	45	71	φ40	770 lm	36-42V@150mA	Aluminium	
SL-DL-279-7w-R-N.WHT		4000K				840 lm		Cree / Bridgelux	
SL-DL-279-7w-R-WHT		6500K				875 lm		Philips / Bag	
								Triac / 0-10v / Dali	
SL-DL-280-14w-R-W.WHT	80 / 90	3000K	60	87	φ55	1540 lm	36-42V@300 mA	Aluminium	
SL-DL-280-14w-R-N.WHT		4000K				1680 lm		Cree / Bridgelux	
SL-DL-280-14w-R-WHT		6500K				1750 lm		Fulham / Philips / Bag	
								Triac / 0-10v / Dali	
SL-DL-281-20w-R-W.WHT	80 / 90	3000K	80	117	φ75	2200 lm	36-42V@500mA	Aluminium	
SL-DL-281-20w-R-N.WHT		4000K				2400 lm		Cree / Bridgelux	
SL-DL-281-20w-R-WHT		6500K				2500 lm		Fulham	
								Triac / 0-10v / Dali	

### Beam Angle



On request also available in CCT - 2700K / 3500K / 5000K , CRI - 95+  
Also Available in Dali DT8 / DT6 / Tuya Smart

## DOWN LIGHT

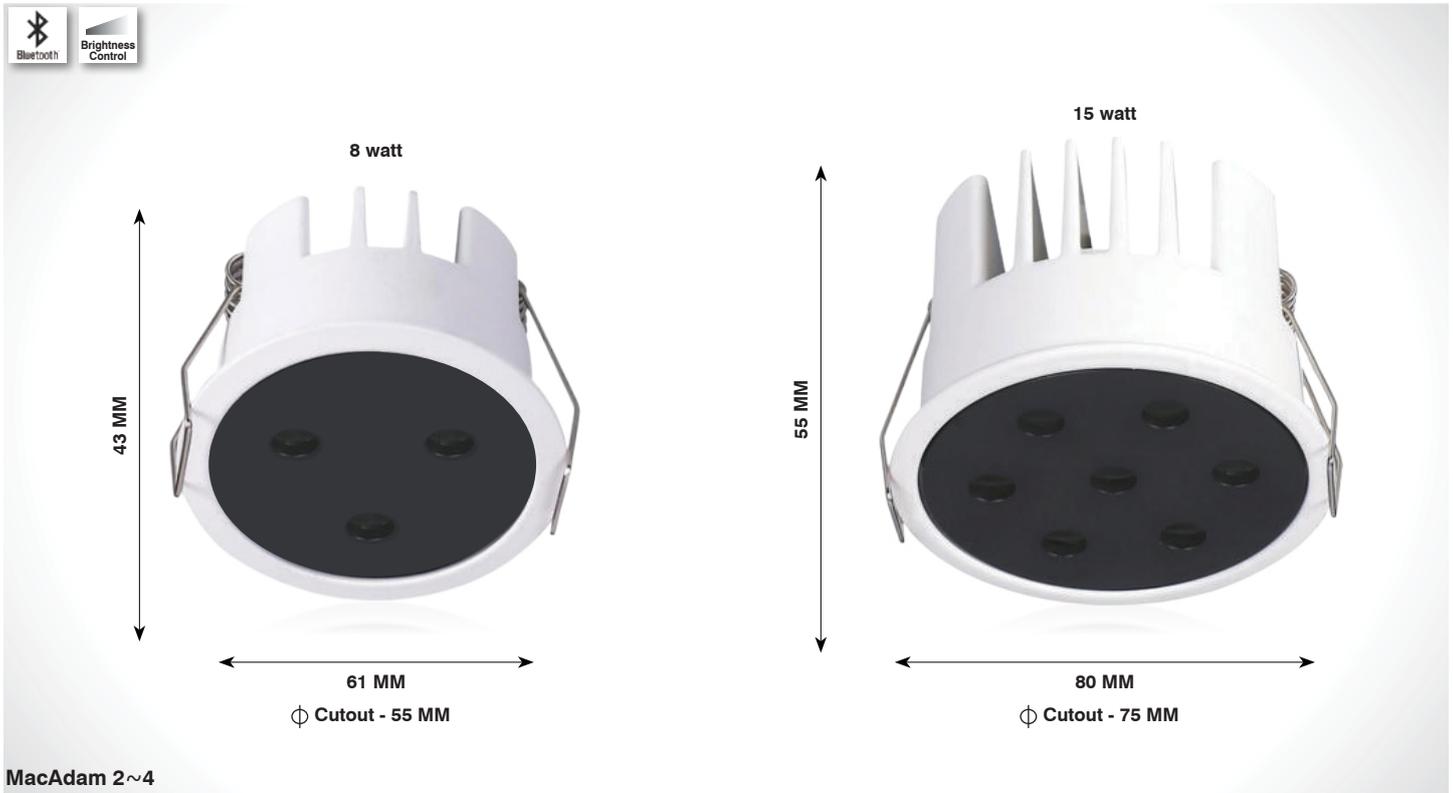



## RAAHI

Product Code	CRI	CCT	Dimension (in mm)			Lumen	Driver Opt	System Specs	
			Diameter	Height	Cutout			Housing	Aluminium
SL-DL-287-8w-R-W.WHT	80 / 90	3000K	61	43	⌀55	880 lm	7-12V@700mA	<b>LED Make</b>	Osram
SL-DL-287-8w-R-N.WHT		4000K				960 lm		<b>Driver Brands</b>	Fulham
SL-DL-287-8w-R-WHT		6500K				1000 lm		<b>Dimming</b>	Triac / 0-10v / Dali
SL-DL-287-15w-R-W.WHT	80 / 90	3000K	80	55	⌀75	1650 lm	11-22V@700mA	<b>Housing</b>	Aluminium
SL-DL-287-15w-R-N.WHT		4000K				1800 lm		<b>LED Make</b>	Osram
SL-DL-287-15w-R-WHT		6500K				1875 lm		<b>Driver Brands</b>	Osram
								<b>Dimming</b>	Triac / 0-10v / Dali



**DIMMABLE**

**Beam Angle**



# DOWN LIGHT



MacAdam 2~4





Available Reflector Finish : White / Chrome / Wheat / Black

# ENRICO



Product Code	CRI	CCT	Dimension (in mm)			Lumen	Driver Opt	System Specs	
			Diameter	Height	Cutout			Housing	Aluminium
SL-DL-197-15w-R-W.WHT	80 / 90	3000K				1650 lm	36-42V@350 mA	<b>LED Make</b>	Cree / Bridgelux
SL-DL-197-15w-R-N.WHT		4000K	84	91	φ75	1800 lm		<b>Driver Brands</b>	Fulham / Philips / Bag
SL-DL-197-15w-R-WHT		6500K				1875 lm		<b>Dimming</b>	Triac / 0-10v / Dali
SL-DL-197-25w-R-W.WHT	80 / 90	3000K				2750 lm	36-42V@700mA	<b>Housing</b>	Aluminium
SL-DL-197-25w-R-N.WHT		4000K	104	104	φ95	3000 lm		<b>LED Make</b>	Cree / Bridgelux
SL-DL-197-25w-R-WHT		6500K				3125 lm		<b>Driver Brands</b>	Fulham
								<b>Dimming</b>	Triac / 0-10v / Dali
SL-DL-197-30w-R-W.WHT	80 / 90	3000K				3300 lm	36-42V@750mA	<b>Housing</b>	Aluminium
SL-DL-197-30w-R-N.WHT		4000K	104	104	φ95	3600 lm		<b>LED Make</b>	Cree / Bridgelux
SL-DL-197-30w-R-WHT		6500K				3750 lm		<b>Driver Brands</b>	Fulham
								<b>Dimming</b>	Triac / 0-10v / Dali
SL-DL-197-35w-R-W.WHT	80 / 90	3000K				3850 lm	36-42V@850mA	<b>Housing</b>	Aluminium
SL-DL-197-35w-R-N.WHT		4000K	114	104	φ105	4200 lm		<b>LED Make</b>	Cree / Bridgelux
SL-DL-197-35w-R-WHT		6500K				4375 lm		<b>Driver Brands</b>	Fulham
								<b>Dimming</b>	Triac / 0-10v / Dali

### Beam Angle



### Application



On request also available in CCT - 2700K / 3500K / 5000K , CRI - 95+  
Also Available in Dali DT8 / DT6 / Tuya Smart

## DOWN LIGHT




## RUBEN




Product Code	CRI	CCT	Dimension (in mm)			Lumen	Driver Opt	System Specs	
			Diameter	Height	Cutout			Housing	LED Make
SL-DL-267-30w-R-W.WHT	80 / 90	3000K				3300 lm	36-42V@750mA	Aluminium	
SL-DL-267-30w-R-N.WHT		4000K	115	88	∅ 98	3600 lm		Cree / Bridgelux	
SL-DL-267-30w-R-WHT		6500K				3750 lm		Fulham	
								Triac / 0-10v / Dali	

Beam Angle



## DOWN LIGHT

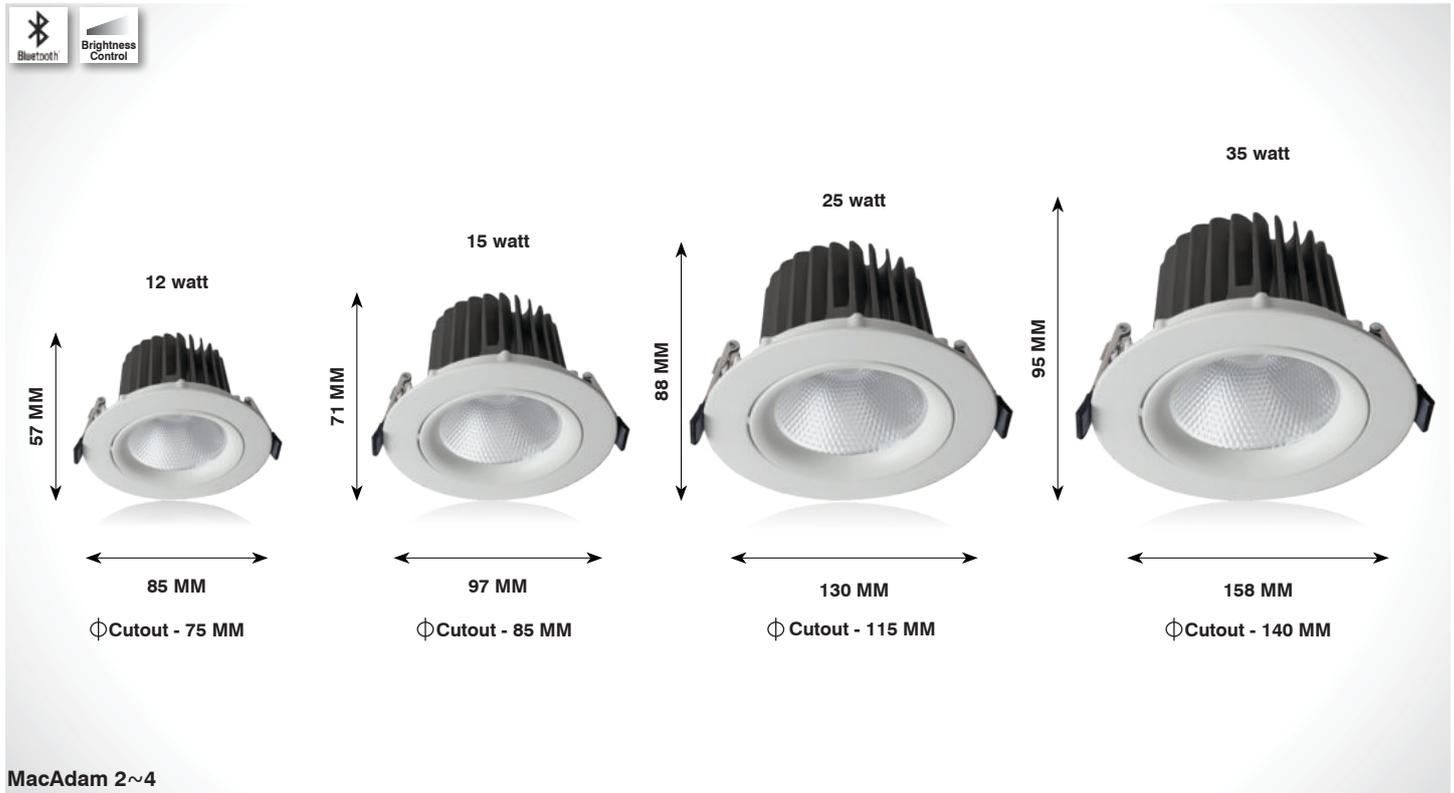


MacAdam 2~4

## THEA



Product Code	CRI	CCT	Dimension (in mm)			Lumen	Driver Opt	System Specs	
			Diameter	Height	Cutout			Housing	
SL-DL-207-12w-R-W.WHT	80 / 90	3000K	85	57	Φ75	1320 lm	36-42V@300mA	Aluminium	
SL-DL-207-12w-R-N.WHT		4000K				1440 lm		Cree / Bridgelux	
SL-DL-207-12w-R-WHT		6500K				1500 lm		Fulham / Philips / Bag	
								Triac / 0-10v / Dali	
SL-DL-207-15w-R-W.WHT	80 / 90	3000K	97	71	Φ85	1650 lm	36-42V@350mA	Aluminium	
SL-DL-207-15w-R-N.WHT		4000K				1800 lm		Cree / Bridgelux	
SL-DL-207-15w-R-WHT		6500K				1875 lm		Fulham / Philips / Bag	
								Triac / 0-10v / Dali	
SL-DL-207-25w-R-W.WHT	80 / 90	3000K	130	88	Φ115	2750 lm	36-42V@700 mA	Aluminium	
SL-DL-207-25w-R-N.WHT		4000K				3000 lm		Cree / Bridgelux	
SL-DL-207-25w-R-WHT		6500K				3125 lm		Fulham	
								Triac / 0-10v / Dali	
SL-DL-207-35w-R-W.WHT	80 / 90	3000K	158	95	Φ140	3850 lm	36-42V@850 mA	Aluminium	
SL-DL-207-35w-R-N.WHT		4000K				4200 lm		Cree / Bridgelux	
SL-DL-207-35w-R-WHT		6500K				4375 lm		Fulham	
								Triac / 0-10v / Dali	

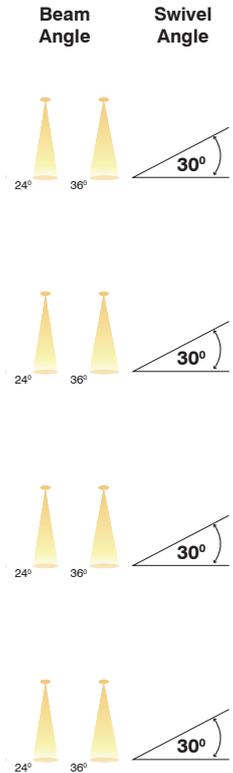


### Application

On request also available in CCT - 2700K / 3500K / 5000K , CRI - 95+  
Also Available in Dali DT8 / DT6 / Tuya Smart



# DOWN LIGHT

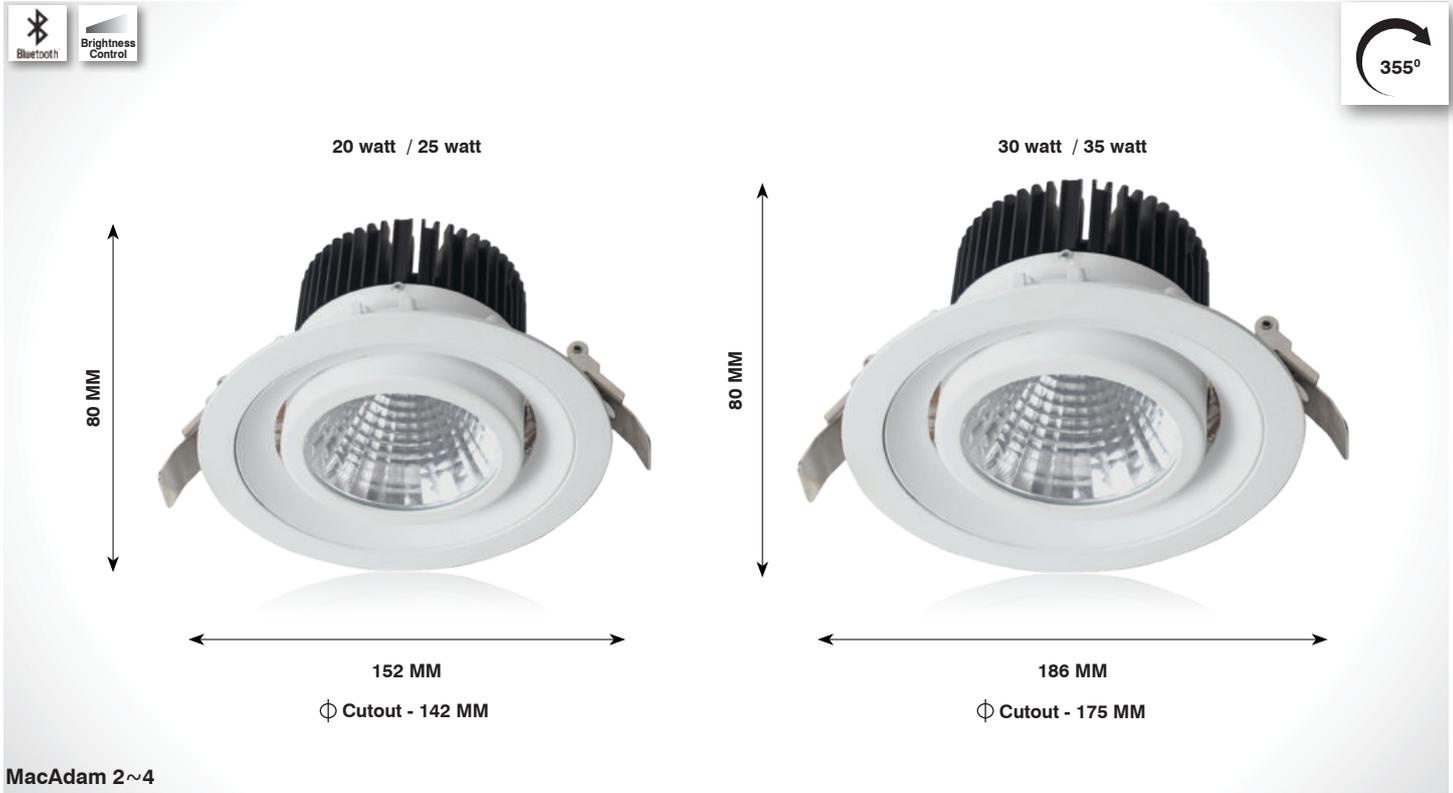


MacAdam 2~4

# ZORION



Product Code	CRI	CCT	Dimension (in mm)			Lumen	Driver Opt	System Specs	
SL-DL-85-20w-R-W.WHT	80 / 90	3000K	Diameter	Height	Cutout	2200 lm	36-42V@500 mA	<b>Housing</b>	Aluminium
SL-DL-85-20w-R-N.WHT		4000K	152	80	φ142	2400 lm		<b>LED Make</b>	Cree / Bridgelux
SL-DL-85-20w-R-WHT		6500K				2500 lm		<b>Driver Brands</b>	Fulham
								<b>Dimming</b>	Triac / 0-10v / Dali
SL-DL-85-25w-R-W.WHT	80 / 90	3000K	Diameter	Height	Cutout	2750 lm	36-42V@700mA	<b>Housing</b>	Aluminium
SL-DL-85-25w-R-N.WHT		4000K	152	80	φ142	3000 lm		<b>LED Make</b>	Cree / Bridgelux
SL-DL-85-25w-R-WHT		6500K				3125 lm		<b>Driver Brands</b>	Fulham
								<b>Dimming</b>	Triac / 0-10v / Dali
SL-DL-85-30w-R-W.WHT	80 / 90	3000K	Diameter	Height	Cutout	3300 lm	36-42V@750mA	<b>Housing</b>	Aluminium
SL-DL-85-30w-R-N.WHT		4000K	186	80	φ175	3600 lm		<b>LED Make</b>	Cree / Bridgelux
SL-DL-85-30w-R-WHT		6500K				3750 lm		<b>Driver Brands</b>	Fulham
								<b>Dimming</b>	Triac / 0-10v / Dali
SL-DL-85-35w-R-W.WHT	80 / 90	3000K	Diameter	Height	Cutout	3850 lm	36-42V@850mA	<b>Housing</b>	Aluminium
SL-DL-85-35w-R-N.WHT		4000K	186	80	φ175	4200 lm		<b>LED Make</b>	Cree / Bridgelux
SL-DL-85-35w-R-WHT		6500K				4375 lm		<b>Driver Brands</b>	Fulham
								<b>Dimming</b>	Triac / 0-10v / Dali

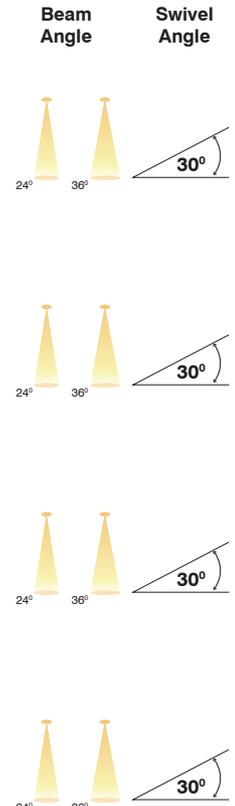

On request also available in CCT - 2700K / 3500K / 5000K , CRI - 95+  
Also Available in Dali DT8 / DT6 / Tuya Smart

## DOWN LIGHT



MacAdam 2~4

Available Body Finish : White / Black




Available Reflector Finish : Black / Chrome / Rose Gold

## VERDA




Product Code	CRI	CCT	Dimension (in mm)			Lumen	Driver Opt	System Specs	
SL-DL-260-7w-R-W.WHT	80 / 90	3000K	Diameter	Height	Cutout	770 lm	36-42V@150mA	<b>Housing</b>	Aluminium
SL-DL-260-7w-R-N.WHT		4000K	60	38	φ55	840 lm		<b>LED Make</b>	Cree
SL-DL-260-7w-R-WHT		6500K				875 lm		<b>Driver Brands</b>	Philips / Bag
								<b>Dimming</b>	Triac / 0-10v / Dali
SL-DL-260-10w-R-W.WHT	80 / 90	3000K	Diameter	Height	Cutout	1100 lm	36-42V@250mA	<b>Housing</b>	Aluminium
SL-DL-260-10w-R-N.WHT		4000K	80	45	φ75	1200 lm		<b>LED Make</b>	Cree / Bridgelux
SL-DL-260-10w-R-WHT		6500K				1250 lm		<b>Driver Brands</b>	Philips / Fulham / Bag
								<b>Dimming</b>	Triac / 0-10v / Dali
SL-DL-260-15w-R-W.WHT	80 / 90	3000K	Diameter	Height	Cutout	1650 lm	36-42V@350mA	<b>Housing</b>	Aluminium
SL-DL-260-15w-R-N.WHT		4000K	105	53	φ95	1800 lm		<b>LED Make</b>	Cree / Bridgelux
SL-DL-260-15w-R-WHT		6500K				1875 lm		<b>Driver Brands</b>	Philips / Fulham / Bag
								<b>Dimming</b>	Triac / 0-10v / Dali

### Beam Angle



On request also available in CCT - 2700K / 3500K / 5000K , CRI - 95+  
Also Available in Dali DT8 / DT6 / Tuya Smart

## DOWN LIGHT

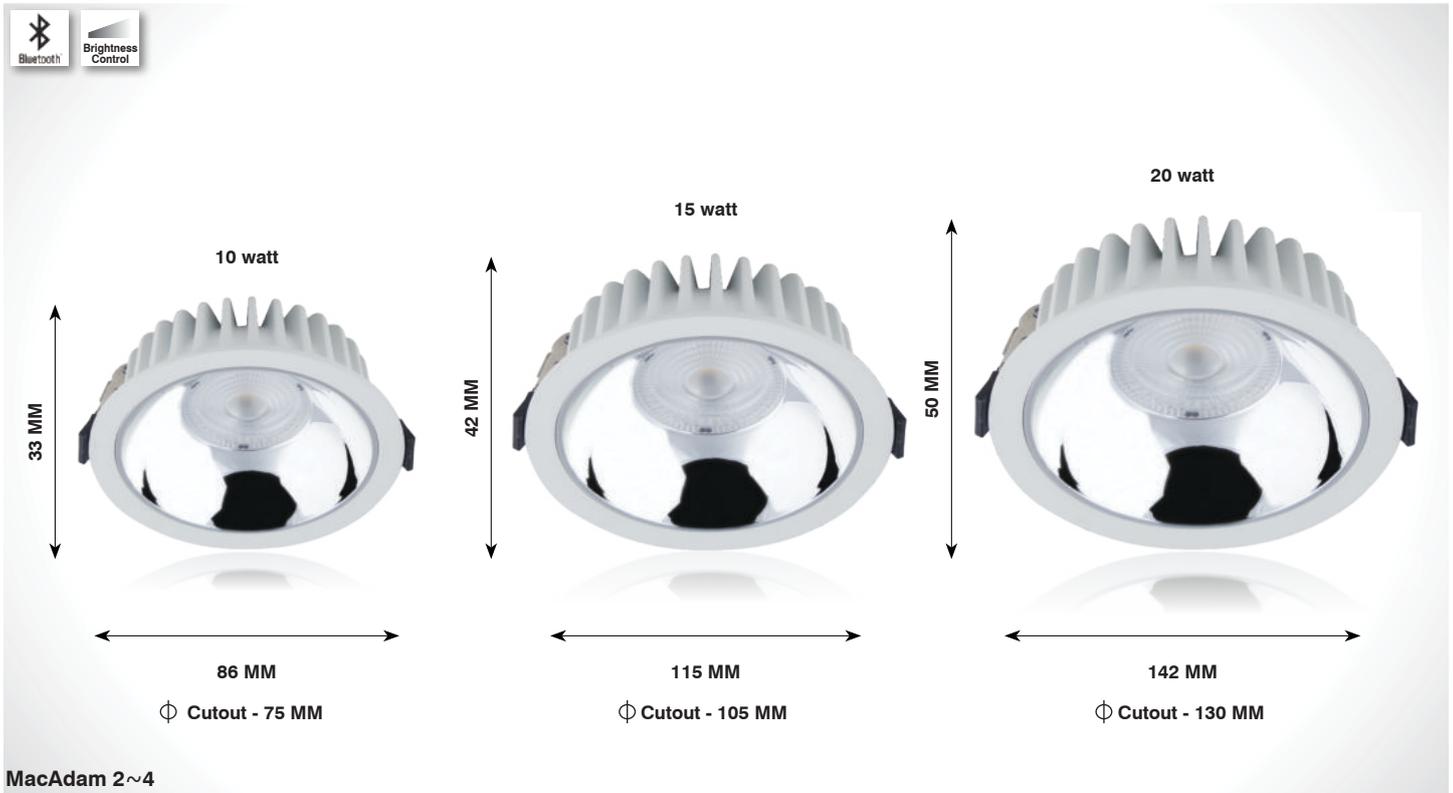




MacAdam 2~4

## ADORA




Product Code	CRI	CCT	Dimension (in mm)			Lumen	Driver Opt	System Specs	
			Diameter	Height	Cutout			Housing	
SL-DL-244-10w-R-W.WHT	80 / 90	3000K	86	33	φ 75	1100 lm	36-42V@250mA	Aluminium	
SL-DL-244-10w-R-N.WHT		4000K				1200 lm		Cree / Bridgelux	
SL-DL-244-10w-R-WHT		6500K				1250 lm		Fulham / Philips / Bag	
								Triac / 0-10v / Dali	
SL-DL-244-15w-R-W.WHT	80 / 90	3000K	115	42	φ105	1650 lm	36-42V@350mA	Aluminium	
SL-DL-244-15w-R-N.WHT		4000K				1800 lm		Cree / Bridgelux	
SL-DL-244-15w-R-WHT		6500K				1875 lm		Fulham / Philips / Bag	
								Triac / 0-10v / Dali	
SL-DL-244-20w-R-W.WHT	80 / 90	3000K	142	50	φ130	2200 lm	36-42V@500mA	Aluminium	
SL-DL-244-20w-R-N.WHT		4000K				2400 lm		Cree / Bridgelux	
SL-DL-244-20w-R-WHT		6500K				2500 lm		Fulham	
								Triac / 0-10v / Dali	

### Beam Angle



# DOWN LIGHT



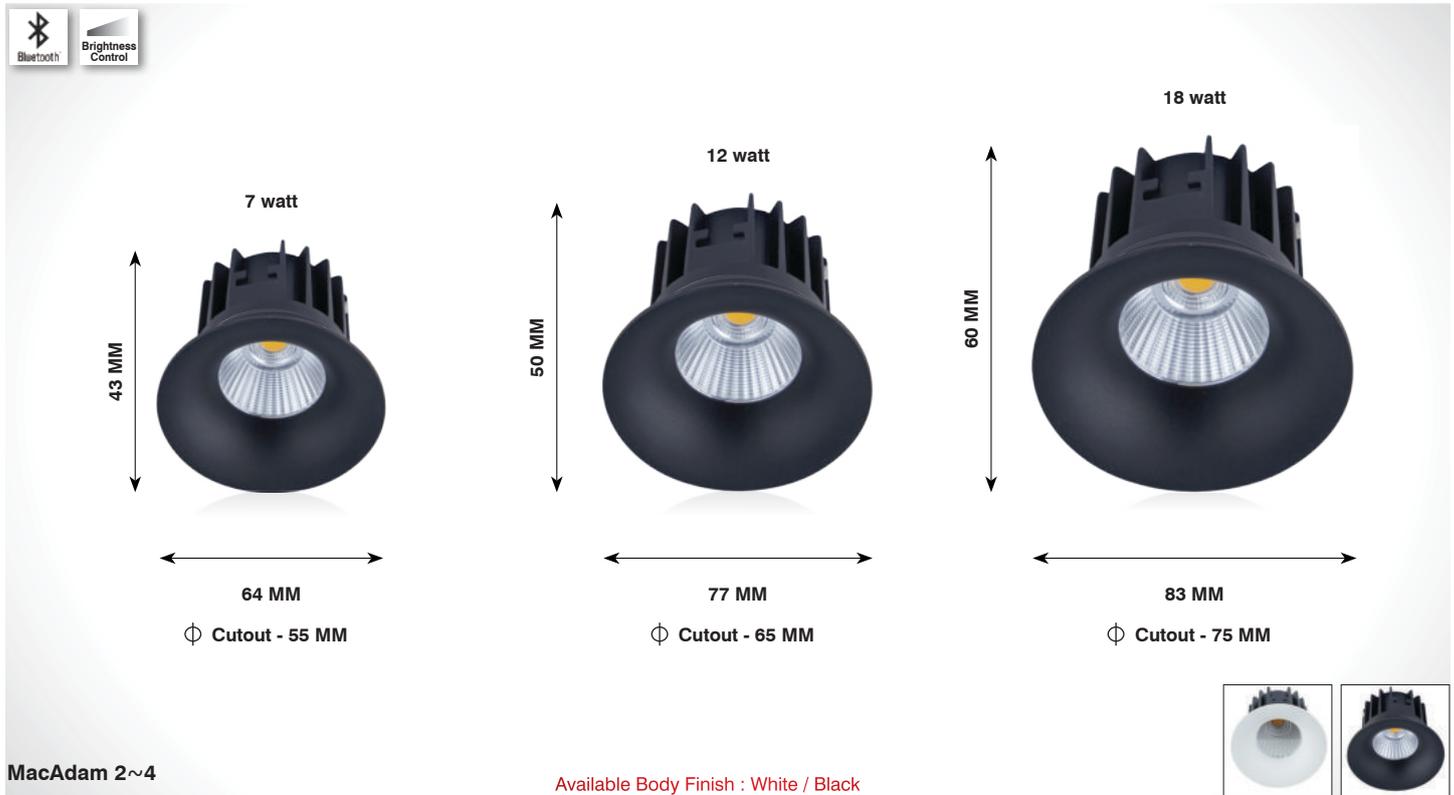


# MELBA




Product Code	CRI	CCT	Dimension (in mm)			Lumen	Driver Opt	System Specs	
SL-DL-254-7w-R-W.WHT	80 / 90	3000K	Diameter	Height	Cutout	770 lm	36-42V@150mA	<b>Housing</b>	Aluminium
SL-DL-254-7w-R-N.WHT		4000K	64	43	φ 55	840 lm		<b>LED Make</b>	Cree / Bridgelux
SL-DL-254-7w-R-WHT		6500K				875 lm		<b>Driver Brands</b>	Fulham / Philips / Bag
								<b>Dimming</b>	Triac / 0-10v / Dali
SL-DL-254-12w-R-W.WHT	80 / 90	3000K	Diameter	Height	Cutout	1320 lm	36-42V@300mA	<b>Housing</b>	Aluminium
SL-DL-254-12w-R-N.WHT		4000K	77	50	φ 65	1440 lm		<b>LED Make</b>	Cree / Bridgelux
SL-DL-254-12w-R-WHT		6500K				1500 lm		<b>Driver Brands</b>	Fulham / Philips / Bag
								<b>Dimming</b>	Triac / 0-10v / Dali
SL-DL-254-18w-R-W.WHT	80 / 90	3000K	Diameter	Height	Cutout	1980 lm	36-42V@400mA	<b>Housing</b>	Aluminium
SL-DL-254-18w-R-N.WHT		4000K	83	60	φ 75	2160 lm		<b>LED Make</b>	Cree / Bridgelux
SL-DL-254-18w-R-WHT		6500K				2250 lm		<b>Driver Brands</b>	Fulham
								<b>Dimming</b>	Triac / 0-10v / Dali

### Beam Angle



On request also available in CCT - 2700K / 3500K / 5000K , CRI - 95+  
Also Available in Dali DT8 / DT6 / Tuya Smart

## DOWN LIGHT





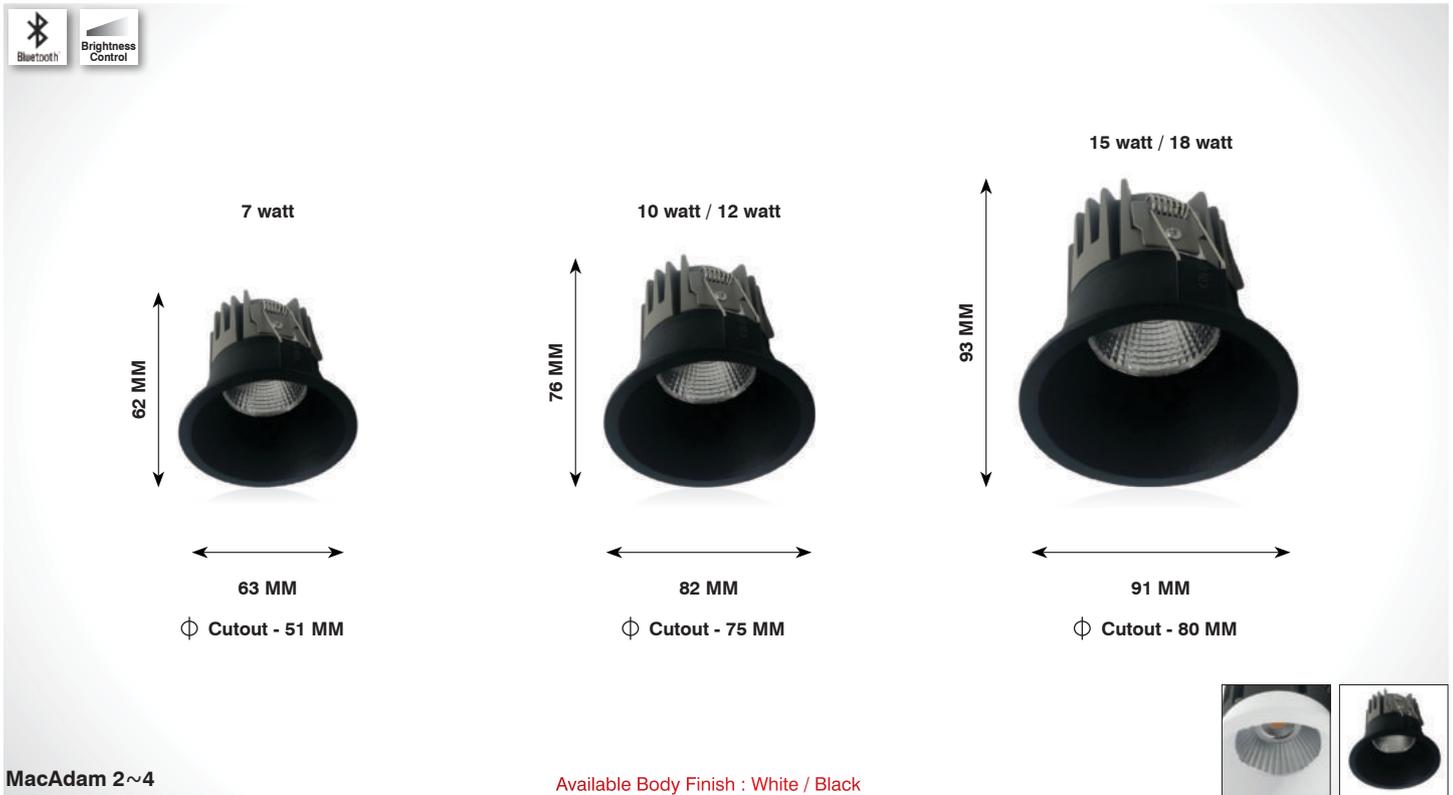


## TRIGO



Product Code	CRI	CCT	Dimension (in mm)			Lumen	Driver Opt	System Specs	
			Diameter	Height	Cutout			<b>Housing</b>	Aluminium
SL-DL-282-7w-R-W.WHT	80 / 90	3000K	63	62	φ51	770 lm	36-42V@150mA	<b>LED Make</b>	Cree / Bridgelux
SL-DL-282-7w-R-N.WHT		4000K				840 lm		<b>Driver Brands</b>	Philips / Bag
SL-DL-282-7w-R-WHT		6500K				875 lm		<b>Dimming</b>	Triac / 0-10v / Dali
SL-DL-282-10w-R-W.WHT	80 / 90	3000K	82	76	φ75	1100 lm	36-42V@250mA	<b>Housing</b>	Aluminium
SL-DL-282-10w-R-N.WHT		4000K				1200 lm		<b>LED Make</b>	Cree / Bridgelux
SL-DL-282-10w-R-WHT		6500K				1250 lm		<b>Driver Brands</b>	Philips / Bag
								<b>Dimming</b>	Triac / 0-10v / Dali
SL-DL-282-12w-R-W.WHT	80 / 90	3000K	82	76	φ75	1320 lm	36-42V@300mA	<b>Housing</b>	Aluminium
SL-DL-282-12w-R-N.WHT		4000K				1440 lm		<b>LED Make</b>	Cree / Bridgelux
SL-DL-282-12w-R-WHT		6500K				1500 lm		<b>Driver Brands</b>	Philips / Bag
								<b>Dimming</b>	Triac / 0-10v / Dali
SL-DL-282-15w-R-W.WHT	80 / 90	3000K	91	93	φ80	1650 lm	36-42V@350mA	<b>Housing</b>	Aluminium
SL-DL-282-15w-R-N.WHT		4000K				1800 lm		<b>LED Make</b>	Cree / Bridgelux
SL-DL-282-15w-R-WHT		6500K				1875 lm		<b>Driver Brands</b>	Fulham / Bag
								<b>Dimming</b>	Triac / 0-10v / Dali
SL-DL-282-18w-R-W.WHT	80 / 90	3000K	91	93	φ80	1980 lm	36-42V@400mA	<b>Housing</b>	Aluminium
SL-DL-282-18w-R-N.WHT		4000K				2160 lm		<b>LED Make</b>	Cree / Bridgelux
SL-DL-282-18w-R-WHT		6500K				2250 lm		<b>Driver Brands</b>	Fulham
								<b>Dimming</b>	Triac / 0-10v / Dali

### Beam Angle



### Application

On request also available in CCT - 2700K / 3500K / 5000K , CRI - 95+  
Also Available in Dali DT8 / DT6 / Tuya Smart



## DOWN LIGHT



Available Body Finish : White / Black




Available Reflector Finish : Titanium Black / Copper / Chrome

## MARSH



Product Code	CRI	CCT	Dimension (in mm)			Lumen	Driver Opt	System Specs	
			Diameter	Height	Cutout			Housing	Aluminium
SL-DL-288-7w-R-W.WHT	80 / 90	3000K	75	61	φ 65	770 lm	36-42V@150 mA	<b>LED Make</b>	Cree / Bridgelux
SL-DL-288-7w-R-N.WHT		4000K				840 lm		<b>Driver Brands</b>	Fulham / Philips / Bag
SL-DL-288-7w-R-WHT		6500K				875 lm		<b>Dimming</b>	Triac / 0-10v / Dali
SL-DL-288-10w-R-W.WHT	80 / 90	3000K	85	80	φ 73	1100 lm	36-42V@250 mA	<b>Housing</b>	Aluminium
SL-DL-288-10w-R-N.WHT		4000K				1200 lm		<b>LED Make</b>	Cree / Bridgelux
SL-DL-288-10w-R-WHT		6500K				1250 lm		<b>Driver Brands</b>	Fulham / Philips / Bag
								<b>Dimming</b>	Triac / 0-10v / Dali
SL-DL-288-12w-R-W.WHT	80 / 90	3000K	85	80	φ 73	1320 lm	36-42V@300 mA	<b>Housing</b>	Aluminium
SL-DL-288-12w-R-N.WHT		4000K				1440 lm		<b>LED Make</b>	Cree / Bridgelux
SL-DL-288-12w-R-WHT		6500K				1500 lm		<b>Driver Brands</b>	Fulham / Philips / Bag
								<b>Dimming</b>	Triac / 0-10v / Dali

### Beam Angle



On request also available in CCT - 2700K / 3500K / 5000K , CRI - 95+  
Also Available in Dali DT8 / DT6 / Tuya Smart


## DOWN LIGHT




## OWEN



Product Code	CRI	CCT	Dimension (in mm)			Lumen	Driver Opt	System Specs	
			Diameter	Height	Cutout			Housing	LED Make
SL-DL-220-9w-R-W.WHT	80 / 90	3000K	62	60	∅55	990 lm	36-42V@200mA	Aluminium	Cree / Bridgelux
SL-DL-220-9w-R-N.WHT		4000K	62	60	∅55	1080 lm			Fulham / Philips / Bag
SL-DL-220-9w-R-WHT		6500K				1125 lm			Triac / 0-10v / Dali
SL-DL-220-15w-R-W.WHT	80 / 90	3000K	80	90	∅65	1650 lm	36-42V@350mA	Aluminium	Cree / Bridgelux
SL-DL-220-15w-R-N.WHT		4000K	80	90	∅65	1800 lm			Fulham / Philips / Bag
SL-DL-220-15w-R-WHT		6500K				1875 lm			Triac / 0-10v / Dali

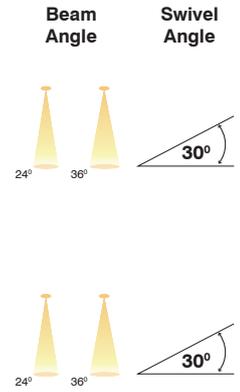

## DOWN LIGHT

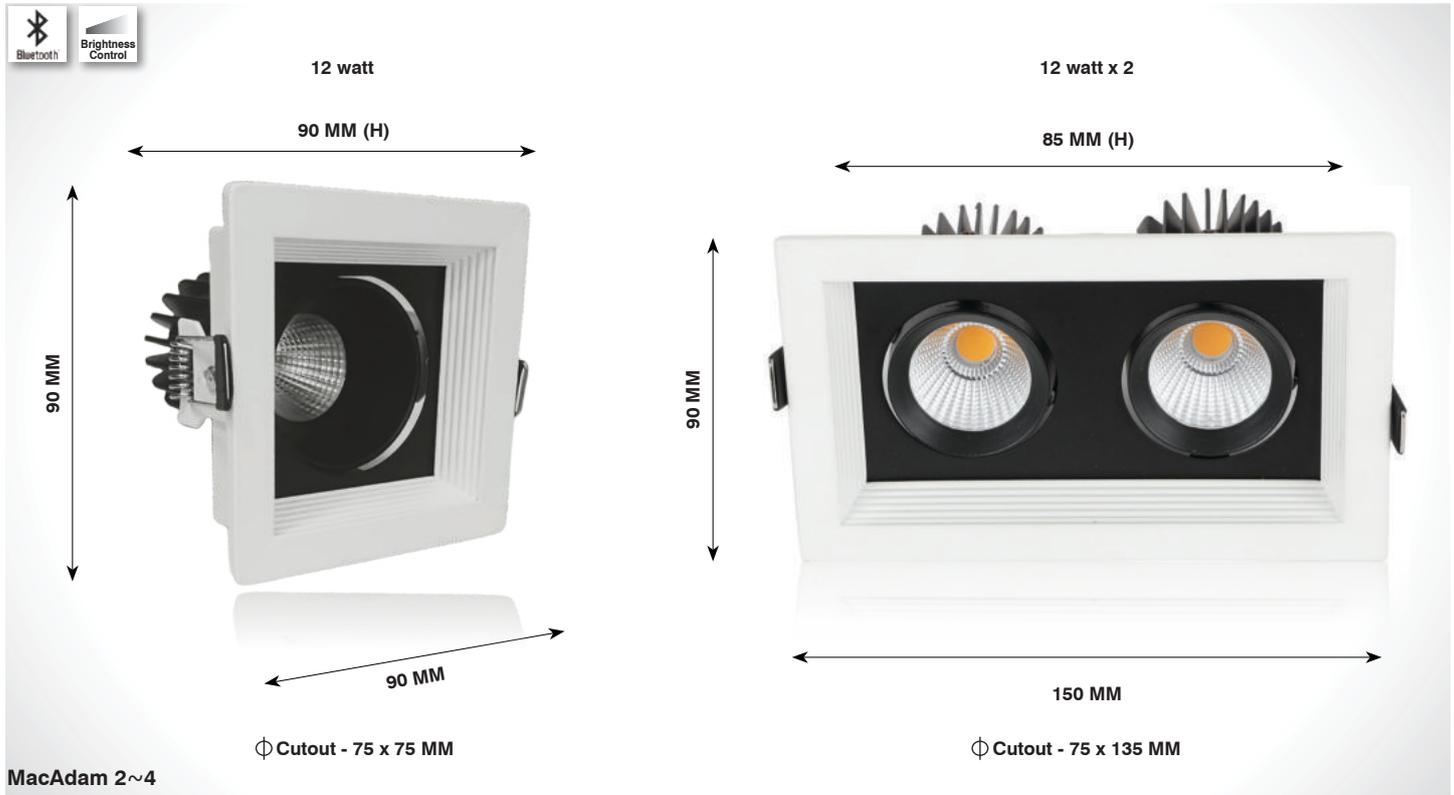

## FLORIS



Product Code	CRI	CCT	Dimension (in mm)			Lumen	Driver Opt	System Specs		Beam Angle	Swivel Angle
			Diameter	Height	Cutout			Housing	LED Make		
SL-DL-269-12w-R-W.WHT	80 / 90	3000K				1320 lm	36-42V@300mA	Aluminium	Cree / Bridgelux		
SL-DL-269-12w-R-N.WHT		4000K	90 x 90	90	φ75 x 75	1440 lm		Fulham / Philips / Bag	Cree / Bridgelux		
SL-DL-269-12w-R-WHT		6500K				1500 lm		Fulham / Philips / Bag	Cree / Bridgelux		
SL-DL-269-12wx2-R-W.WHT	80 / 90	3000K				2640 lm	36-42V@300x2mA	Aluminium	Cree / Bridgelux		
SL-DL-269-12wx2-R-N.WHT		4000K	150 x 90	85	φ75 x 135	2880 lm		Fulham / Philips / Bag	Cree / Bridgelux		
SL-DL-269-12wx2-R-WHT		6500K				3000 lm		Fulham / Philips / Bag	Cree / Bridgelux		

# DOWN LIGHT




# MADRID


Popout



Product Code	CRI	CCT	Dimension (in mm)			Lumen	Driver Opt	System Specs	
			Diameter	Height	Cutout			Housing	Aluminium
SL-DL-272-10w-R-W.WHT	80 / 90	3000K				1100 lm	36-42V@300mA	<b>LED Make</b>	Cree / Bridgelux
SL-DL-272-10w-R-N.WHT		4000K	85	92	φ 70	1200 lm		<b>Driver Brands</b>	Fulham / Philips / Bag
SL-DL-272-10w-R-WHT		6500K				1250 lm		<b>Dimming</b>	Triac / 0-10v / Dali



## DOWN LIGHT

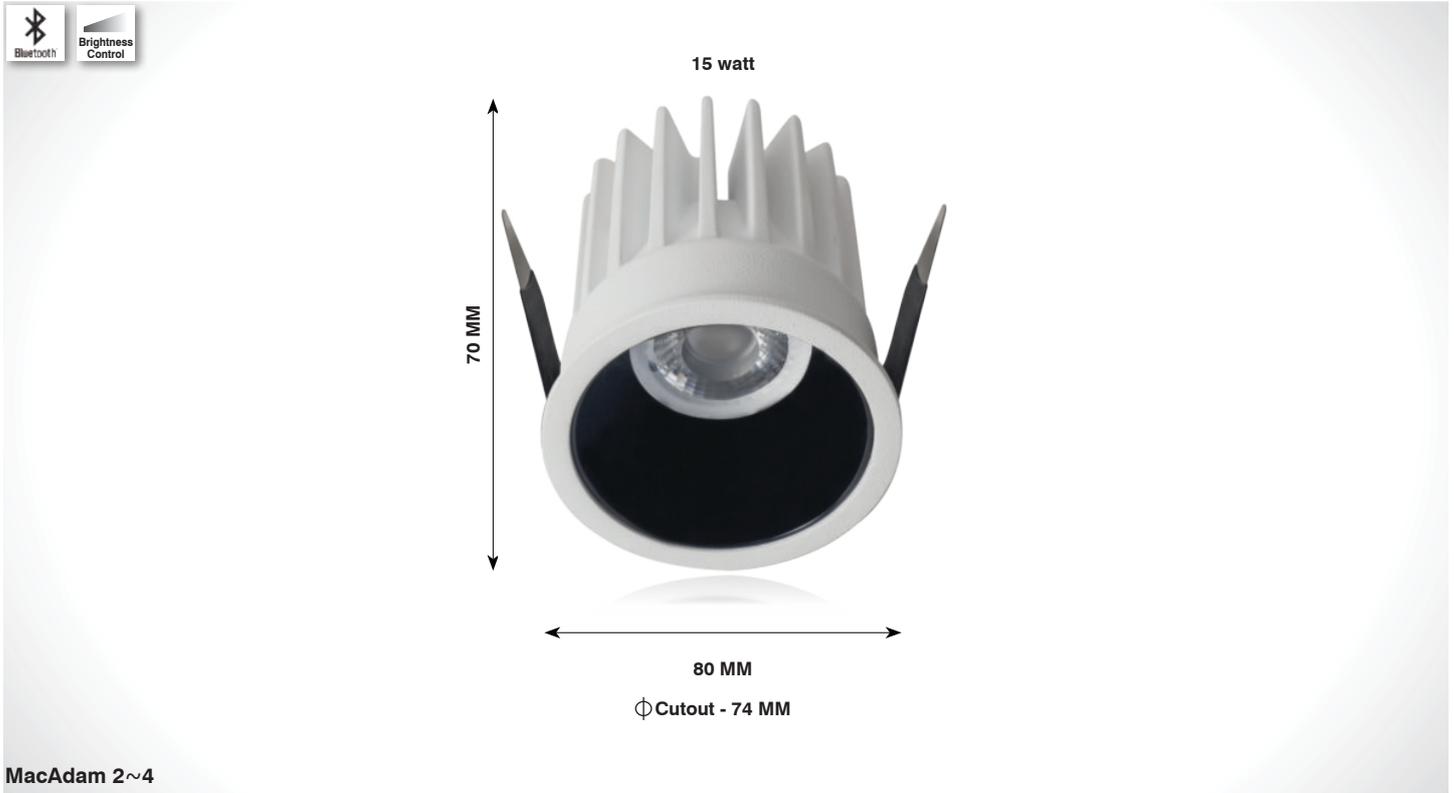


## BARAK




Product Code	CRI	CCT	Dimension (in mm)			Lumen	Driver Opt	System Specs	
			Diameter	Height	Cutout			Housing	Aluminium
SL-DL-209-15w-R-W.WHT	80 / 90	3000K				1650 lm	36-42V@350mA	<b>LED Make</b>	Cree / Bridgelux
SL-DL-209-15w-R-N.WHT		4000K	80	70	∅ 74	1800 lm		<b>Driver Brands</b>	Fulham / Philips / Bag
SL-DL-209-15w-R-WHT		6500K				1875 lm		<b>Dimming</b>	Triac / 0-10v / Dali

Beam Angle



## DOWN LIGHT

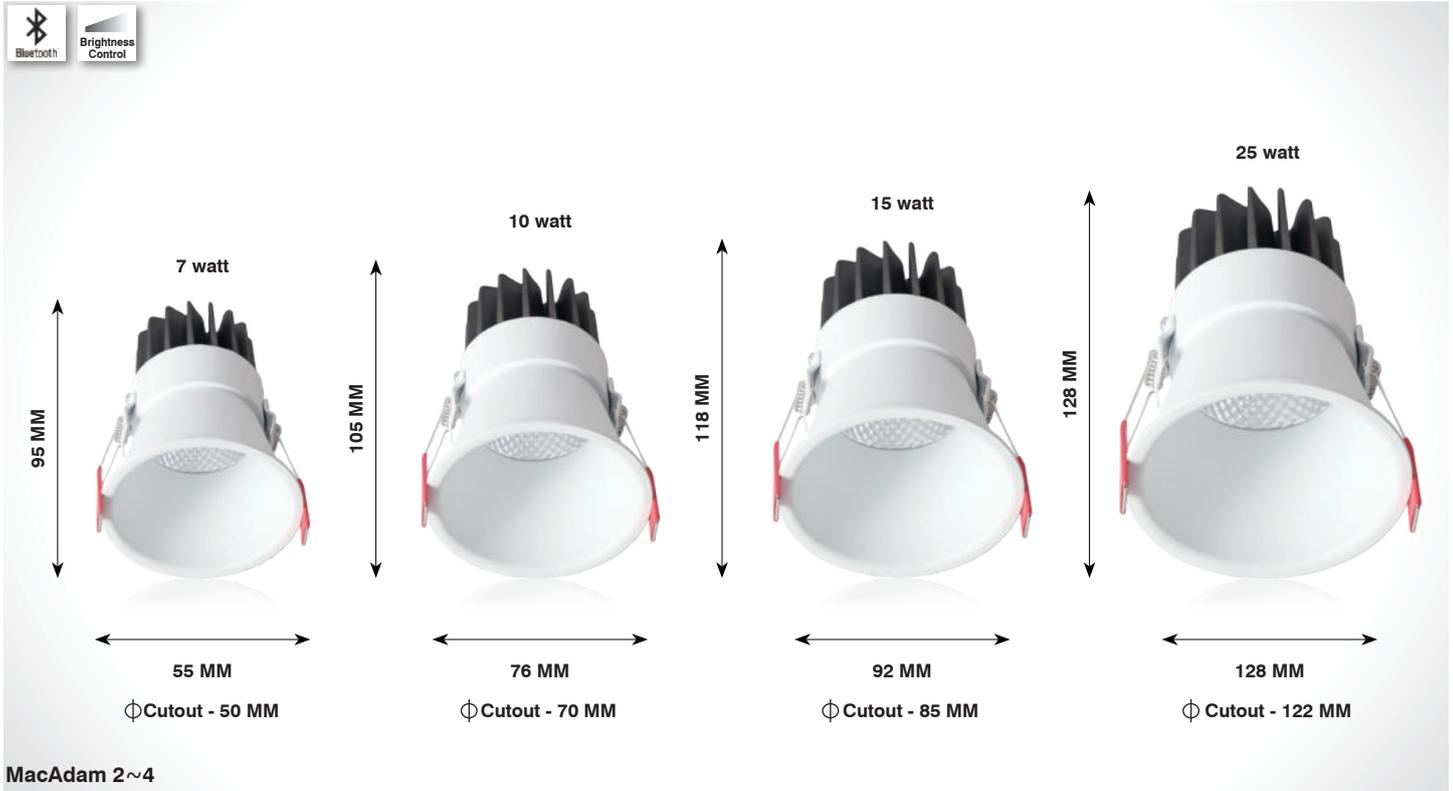





MacAdam 2~4

## KOSTA



Product Code	CRI	CCT	Dimension (in mm)			Lumen	Driver Opt	System Specs	
			Diameter	Height	Cutout			Housing	Aluminium
SL-DL-161-7w-R-W.WHT	80 / 90	3000K	55	95	φ 50	770 lm	36-42V@150mA	<b>LED Make</b>	Cree / Bridgelux
SL-DL-161-7w-R-N.WHT		4000K				840 lm		<b>Driver Brands</b>	Philips / Bag
SL-DL-161-7w-R-WHT		6500K				875 lm		<b>Dimming</b>	Triac / 0-10v / Dali
SL-DL-161-10w-R-W.WHT	80 / 90	3000K	76	105	φ 70	1100 lm	36-42V@250mA	<b>Housing</b>	Aluminium
SL-DL-161-10w-R-N.WHT		4000K				1200 lm		<b>LED Make</b>	Cree / Bridgelux
SL-DL-161-10w-R-WHT		6500K				1250 lm		<b>Driver Brands</b>	Philips / Fulham / Bag
								<b>Dimming</b>	Triac / 0-10v / Dali
SL-DL-161-15w-R-W.WHT	80 / 90	3000K	92	118	φ 85	1650 lm	36-42V@350mA	<b>Housing</b>	Aluminium
SL-DL-161-15w-R-N.WHT		4000K				1800 lm		<b>LED Make</b>	Cree / Bridgelux
SL-DL-161-15w-R-WHT		6500K				1875 lm		<b>Driver Brands</b>	Philips / Fulham / Bag
								<b>Dimming</b>	Triac / 0-10v / Dali
SL-DL-161-25w-R-W.WHT	80 / 90	3000K	128	128	φ 122	2750 lm	36-42V@700mA	<b>Housing</b>	Aluminium
SL-DL-161-25w-R-N.WHT		4000K				3000 lm		<b>LED Make</b>	Cree / Bridgelux
SL-DL-261-25w-R-WHT		6500K				3125 lm		<b>Driver Brands</b>	Fulham
								<b>Dimming</b>	Triac / 0-10v / Dali

### Beam Angle



### Application



On request also available in CCT - 2700K / 3500K / 5000K , CRI - 95+  
Also Available in Dali DT8 / DT6 / Tuya Smart

## DOWN LIGHT



## NEO

Product Code	CRI	CCT	Dimension (in mm)			Lumen	Driver Opt	System Specs	
			Diameter	Height	Cutout			Housing	Aluminium
SL-DL-208-5w-R-W.WHT	80 / 90	3000K	60	45	∅ 50	550 lm	36-42V@150mA	<b>LED Make</b>	Cree / Bridgelux
SL-DL-208-5w-R-N.WHT		4000K				600 lm		<b>Driver Brands</b>	Philips / Bag
SL-DL-208-5w-R-WHT		6500K				625 lm			
SL-DL-208-5w-S-W.WHT	80 / 90	3000K	60 x 60	45	∅ 50	550 lm	36-42V@150mA	<b>LED Make</b>	Cree / Bridgelux
SL-DL-208-5w-S-N.WHT		4000K				600 lm		<b>Driver Brands</b>	Philips / Bag
SL-DL-208-5w-S-WHT		6500K				625 lm			




## DOWN LIGHT




## MINOS



Product Code	CRI	CCT	Dimension (in mm)			Lumen	Driver Opt	System Specs	
			Diameter	Height	Cutout			Housing	Aluminium
SL-DL-153-15w-R-W.WHT	80 / 90	3000K	80	85	∅ 80	1650 lm	36-42V@350mA	<b>LED Make</b>	Cree / Bridgelux
SL-DL-153-15w-R-N.WHT		4000K				1800 lm		<b>Driver Brands</b>	Fulham / Philips / Bag
SL-DL-153-15w-R-WHT		6500K				1875 lm		<b>Dimming</b>	Triac / 0-10v / Dali




# DOWN LIGHT

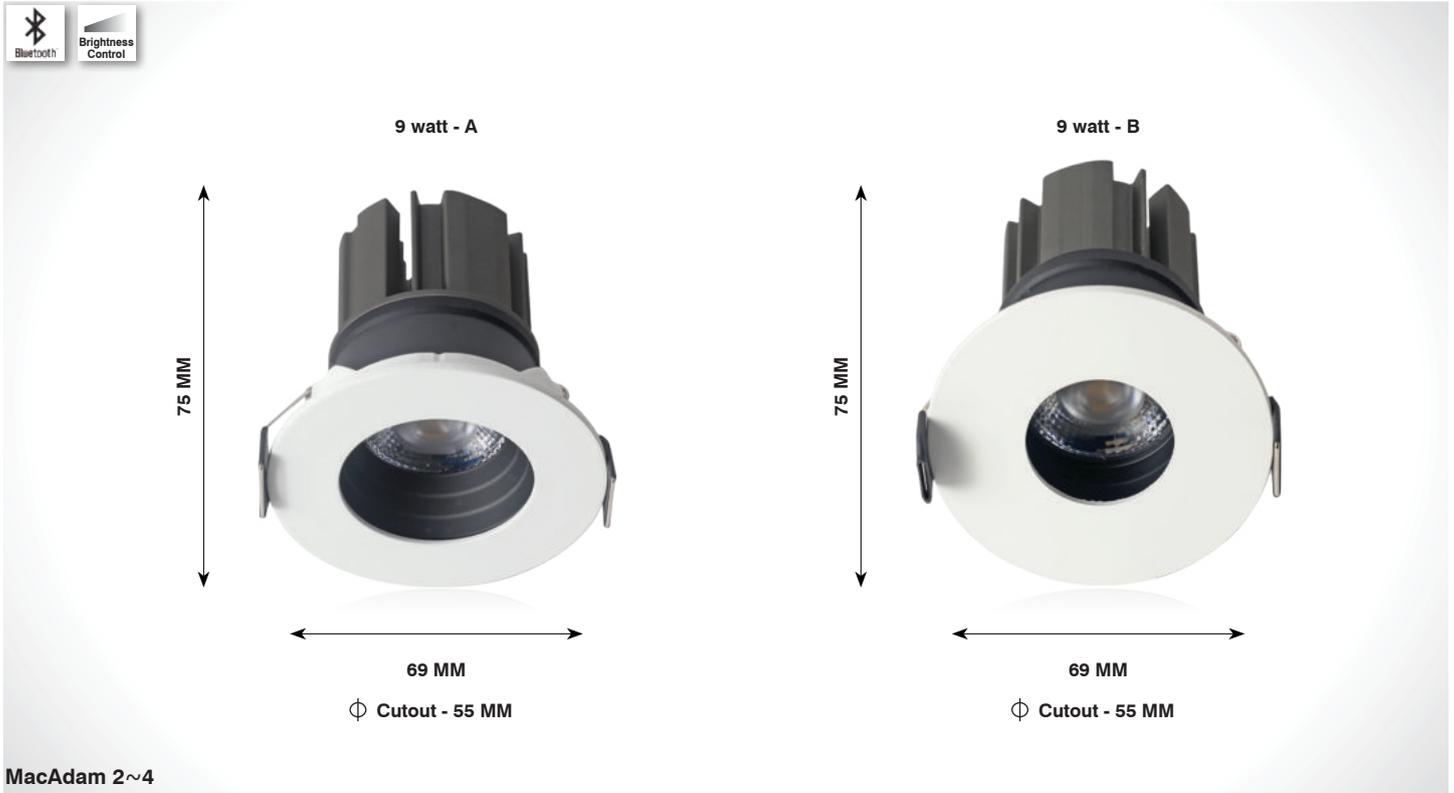


# PENNE



Product Code	CRI	CCT	Dimension (in mm)			Lumen	Driver Opt	System Specs	
			Diameter	Height	Cutout			Housing	Aluminium
SL-DL-219-A-9w-R-W.WHT	80 / 90	3000K	69	75	⌀ 55	990 lm	36-42V@200mA	<b>LED Make</b>	Cree / Bridgelux
SL-DL-219-A-9w-R-N.WHT		4000K				1080 lm		<b>Driver Brands</b>	Fulham / Philips / Bag
SL-DL-219-A-9w-R-WHT		6500K				1125 lm		<b>Dimming</b>	Triac / 0-10v / Dali
SL-DL-219-B-9w-R-W.WHT	80 / 90	3000K	69	75	⌀ 55	990 lm	36-42V@200mA	<b>Housing</b>	Aluminium
SL-DL-219-B-9w-R-N.WHT		4000K				1080 lm		<b>LED Make</b>	Cree / Bridgelux
SL-DL-219-B-9w-R-WHT		6500K				1125 lm		<b>Driver Brands</b>	Fulham / Philips / Bag
								<b>Dimming</b>	Triac / 0-10v / Dali

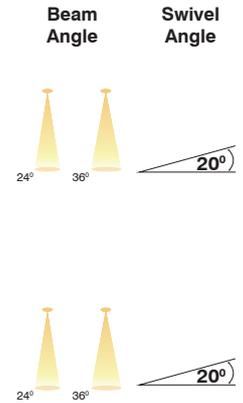

## DOWN LIGHT

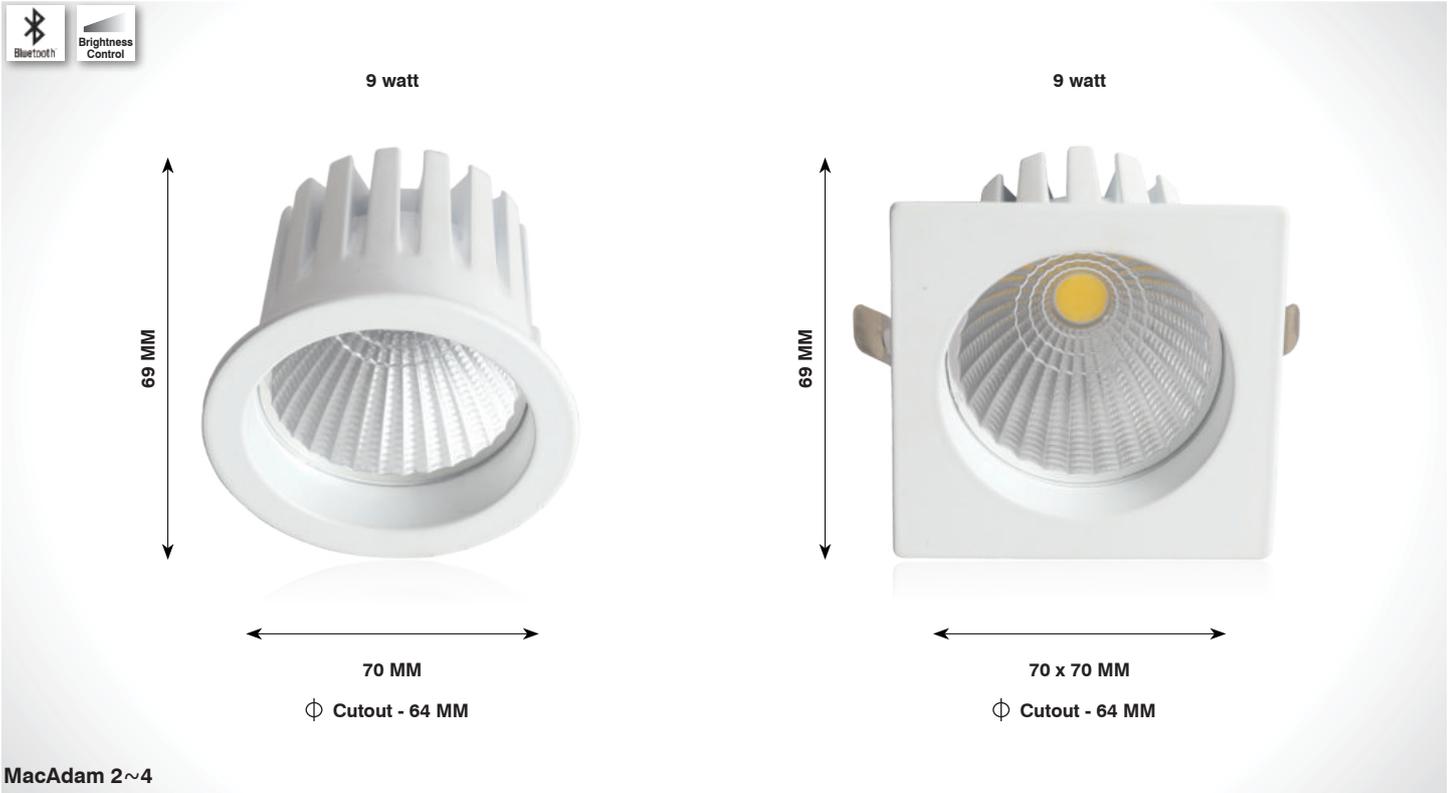



MacAdam 2~4

## LEXIS




Product Code	CRI	CCT	Dimension (in mm)			Lumen	Driver Opt	System Specs	
			Diameter	Height	Cutout			Housing	Aluminium
SL-DL-30-9w-R-W.WHT	80 / 90	3000K				990 lm	36-42V@200mA	<b>Housing</b>	Aluminium
SL-DL-30-9w-R-N.WHT		4000K	70	69	φ64	1080 lm		<b>LED Make</b>	Cree / Bridgelux
SL-DL-30-9w-R-WHT		6500K				1125 lm		<b>Driver Brands</b>	Fulham / Philips / Bag
								<b>Dimming</b>	Triac / 0-10v / Dali
SL-DL-30-9w-S-W.WHT	80 / 90	3000K	Diameter	Height	Cutout	990 lm	36-42V@200mA	<b>Housing</b>	Aluminium
SL-DL-30-9w-S-N.WHT		4000K	70 x 70	69	φ64	1080 lm		<b>LED Make</b>	Cree / Bridgelux
SL-DL-30-9w-S-WHT		6500K				1125 lm		<b>Driver Brands</b>	Fulham / Philips / Bag
								<b>Dimming</b>	Triac / 0-10v / Dali

**Beam Angle**




## DOWN LIGHT

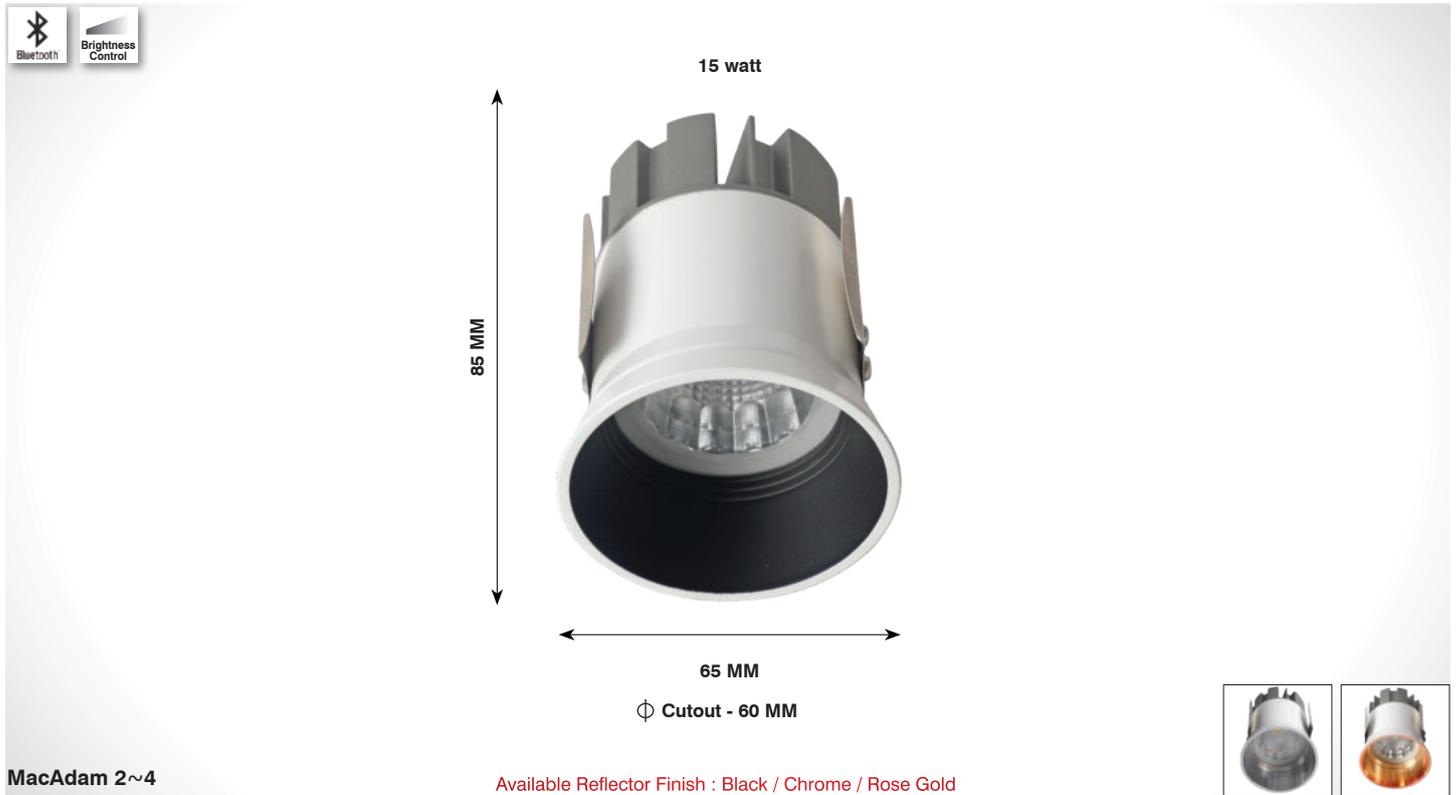

## MYRA

Product Code	CRI	CCT	Dimension (in mm)			Lumen	Driver Opt	System Specs	
			Diameter	Height	Cutout			Housing	Aluminium
SL-DL-204-10w-R-W.WHT	80 / 90	3000K	65	85	∅ 60	1100 lm	36-42V@250mA	<b>LED Make</b>	Cree / Bridgelux
SL-DL-204-10w-R-N.WHT		4000K				1200 lm		<b>Driver Brands</b>	Fulham / Philips / Bag
SL-DL-204-10w-R-WHT		6500K				1250 lm		<b>Dimming</b>	Triac / 0-10v / Dali

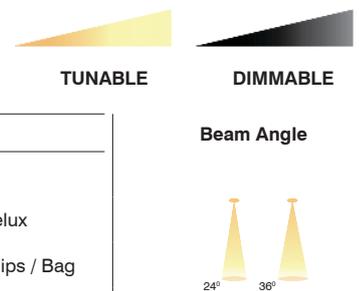

## DOWN LIGHT




## JERRY

Product Code	CRI	CCT	Dimension (in mm)			Lumen	Driver Opt	System Specs	
SL-DL-199-10w-R-W.WHT	80 / 90	3000K	Diameter	Height	Cutout	1100 lm	36-42V@250mA	<b>Housing</b>	Aluminium
SL-DL-199-10w-R-N.WHT		4000K	57	50	∅ 52	1200 lm		<b>LED Make</b>	Cree / Bridgelux
SL-DL-199-10w-R-WHT		6500K				1250 lm		<b>Driver Brands</b>	Fulham / Philips / Bag
								<b>Dimming</b>	Triac / 0-10v / Dali



Beam Angle




# DOWN LIGHT



# DORA

Product Code	CRI	CCT	Dimension (in mm)			Lumen	Driver Opt	System Specs	
SL-DL-200-10w-R-W.WHT	80 / 90	3000K	Diameter	Height	Cutout	1100 lm	36-42V@250mA	<b>Housing</b>	Aluminium
SL-DL-200-10w-R-N.WHT		4000K	82	50	φ75	1200 lm		<b>LED Make</b>	Cree / Bridgelux
SL-DL-200-10w-R-WHT		6500K				1250 lm		<b>Driver Brands</b>	Fulham / Philips / Bag
								<b>Dimming</b>	Triac / 0-10v / Dali



# DOWN LIGHT




MacAdam 2~4

Available Body Finish : White / Black

# TURIN



Product Code	CRI	CCT	Dimension (in mm)			Lumen	Driver Opt	System Specs	
			Diameter	Height	Cutout			Housing	Aluminium
SL-DL-308-6w-R-W.WHT	80 / 90	3000K				660 lm	36-42V@150mA	<b>Housing</b>	Aluminium
SL-DL-308-6w-R-N.WHT		4000K	68	61	φ65	720 lm		<b>LED Make</b>	Cree
SL-DL-308-6w-R-WHT		6500K				750 lm		<b>Driver Brands</b>	Fulham / Philips / Bag
								<b>Dimming</b>	Triac / 0-10v / Dali
SL-DL-309-10w-R-W.WHT	80 / 90	3000K				1100 lm	36-42V@250mA	<b>Housing</b>	Aluminium
SL-DL-309-10w-R-N.WHT		4000K	78	68	φ75	1200 lm		<b>LED Make</b>	Cree
SL-DL-309-10w-R-WHT		6500K				1250 lm		<b>Driver Brands</b>	Fulham / Philips / Bag
								<b>Dimming</b>	Triac / 0-10v / Dali

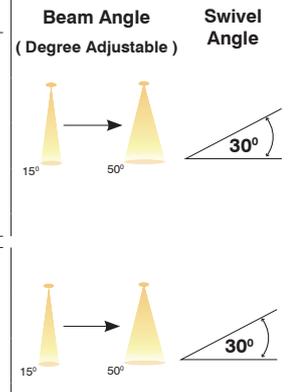

On request also available in CCT - 2700K / 3500K / 5000K , CRI - 95+  
Also Available in Dali DT8 / DT6 / Tuya Smart

## DOWN LIGHT






## CRUZ




Product Code	CRI	CCT	Dimension (in mm)			Lumen	Driver Opt	System Specs	
			Diameter	Height	Cutout			Housing	Aluminium
SL-DL-201-12w-R-W.WHT	80 / 90	3000K	103	40	φ95	1440 lm	30-42V@300mA	<b>LED Make</b>	Bridgelux
SL-DL-201-12w-R-N.WHT		4000K				1500 lm		<b>Driver Brands</b>	Fulham / Philips / Bag
SL-DL-201-12w-R-WHT		6500K						<b>Dimming</b>	Triac / 0-10v / Dali
SL-DL-202-18w-R-W.WHT	80 / 90	3000K	153	40	φ145	2160 lm	52-65V@300mA	<b>Housing</b>	Aluminium
SL-DL-202-18w-R-N.WHT		4000K				2250 lm		<b>LED Make</b>	Bridgelux
SL-DL-202-18w-R-WHT		6500K						<b>Driver Brands</b>	Fulham
								<b>Dimming</b>	Triac / 0-10v / Dali
SL-DL-203-24w-R-W.WHT	80 / 90	3000K	211	40	φ203	2880 lm	52-72V@300mA	<b>Housing</b>	Aluminium
SL-DL-203-24w-R-N.WHT		4000K				3000 lm		<b>LED Make</b>	Bridgelux
SL-DL-203-24w-R-WHT		6500K						<b>Driver Brands</b>	Fulham / HR
								<b>Dimming</b>	Triac / 0-10v / Dali

### Beam Angle



## DOWN LIGHT



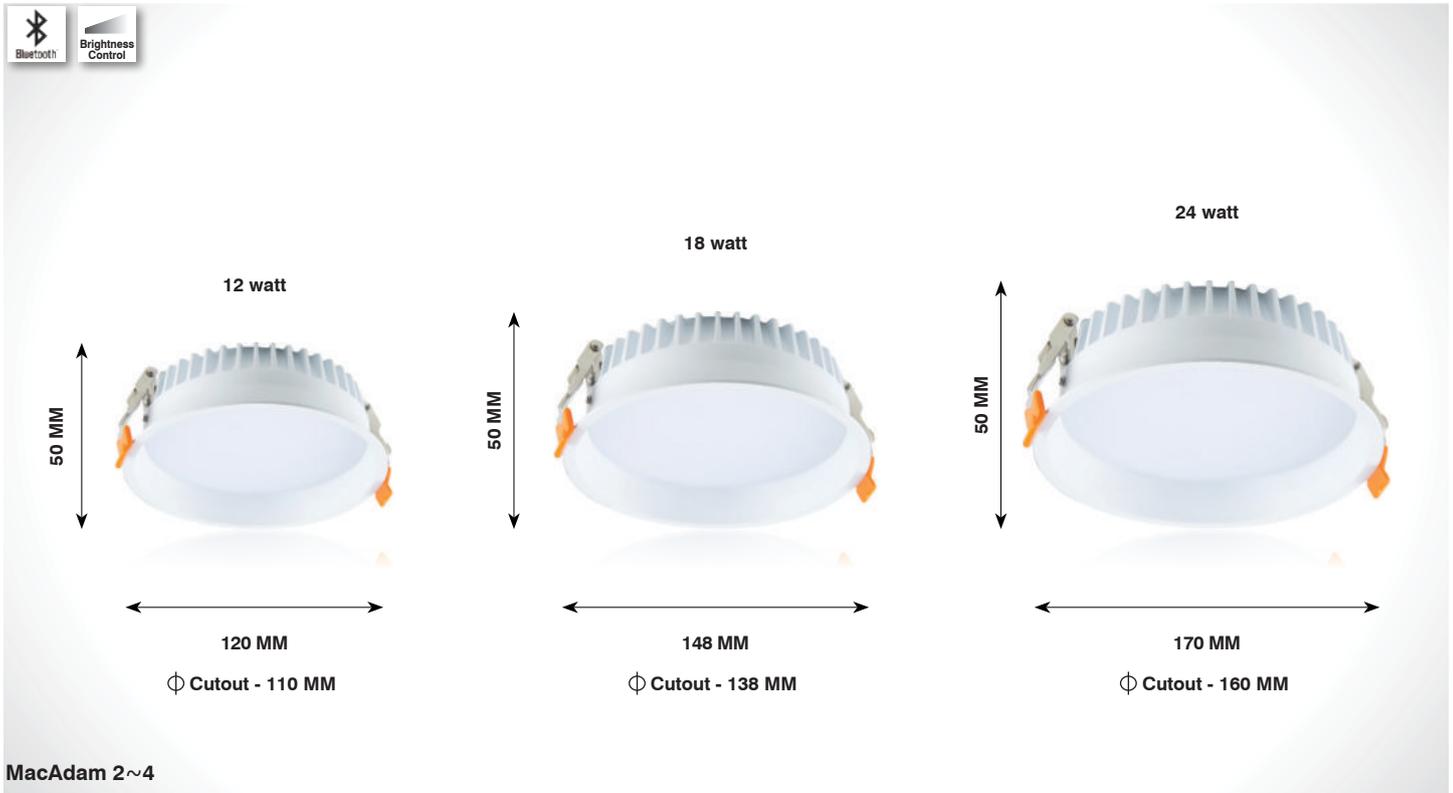


## JASPER




Product Code	CRI	CCT	Dimension (in mm)			Lumen	Driver Opt	System Specs	
SL-DL-242-12w-R-W.WHT	80 / 90	3000K	Diameter	Height	Cutout	1320 lm	30-42V@300mA	<b>Housing</b>	Aluminium
SL-DL-242-12w-R-N.WHT		4000K	120	50	Φ110	1440 lm		<b>LED Make</b>	Bridgelux
SL-DL-242-12w-R-WHT		6500K				1500 lm		<b>Driver Brands</b>	Fulham / Philips / Bag
								<b>Dimming</b>	Triac / 0-10v / Dali
SL-DL-242-18w-R-W.WHT	80 / 90	3000K	Diameter	Height	Cutout	1980 lm	52-65V@300mA	<b>Housing</b>	Aluminium
SL-DL-242-18w-R-N.WHT		4000K	148	50	Φ138	2160 lm		<b>LED Make</b>	Bridgelux
SL-DL-242-18w-R-WHT		6500K				2250 lm		<b>Driver Brands</b>	Fulham
								<b>Dimming</b>	Triac / 0-10v / Dali
SL-DL-242-24w-R-W.WHT	80 / 90	3000K	Diameter	Height	Cutout	2640 lm	52-72V@300mA	<b>Housing</b>	Aluminium
SL-DL-242-24w-R-N.WHT		4000K	170	50	Φ160	2880 lm		<b>LED Make</b>	Bridgelux
SL-DL-242-24w-R-WHT		6500K				3000 lm		<b>Driver Brands</b>	Fulham
								<b>Dimming</b>	Triac / 0-10v / Dali

Beam Angle






## DOWN LIGHT

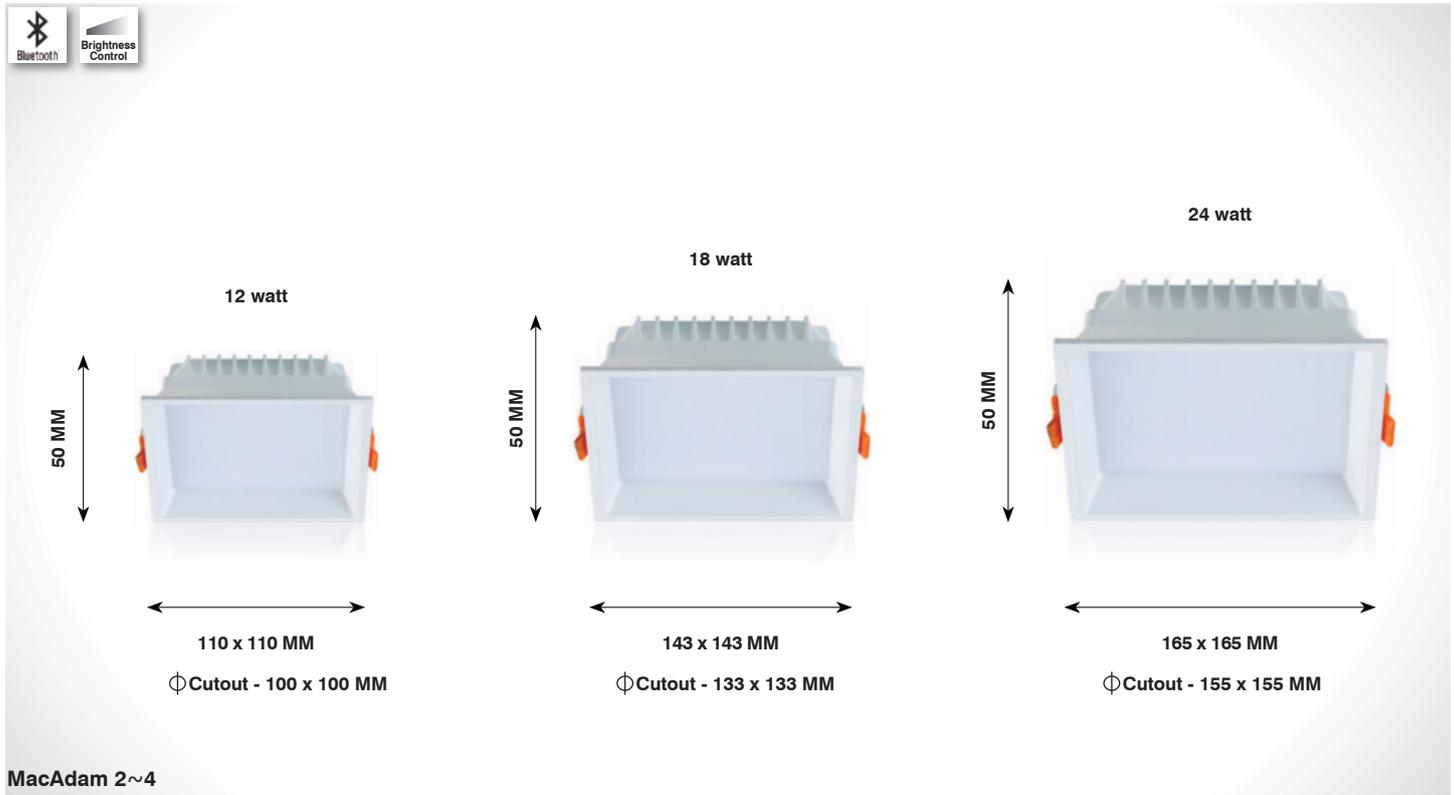


## ROLLO

Product Code	CRI	CCT	Dimension (in mm)			Lumen	Driver Opt	System Specs	
SL-DL-243-12w-S-W.WHT	80 / 90	3000K	Diameter	Height	Cutout	1320 lm	30-42V@300mA	<b>Housing</b>	Aluminium
SL-DL-243-12w-S-N.WHT		4000K	110 x 110	50	Φ100 x 100	1440 lm		<b>LED Make</b>	Bridgelux
SL-DL-243-12w-S-WHT		6500K				1500 lm		<b>Driver Brands</b>	Fulham / Philips / Bag
								<b>Dimming</b>	Triac / 0-10v / Dali
SL-DL-243-18w-S-W.WHT	80 / 90	3000K	Diameter	Height	Cutout	1980 lm	52-65V@300mA	<b>Housing</b>	Aluminium
SL-DL-243-18w-S-N.WHT		4000K	143 x 143	50	Φ133 x 133	2160 lm		<b>LED Make</b>	Bridgelux
SL-DL-243-18w-S-WHT		6500K				2250 lm		<b>Driver Brands</b>	Fulham
								<b>Dimming</b>	Triac / 0-10v / Dali
SL-DL-243-24w-S-W.WHT	80 / 90	3000K	Diameter	Height	Cutout	2640 lm	52-72V@300mA	<b>Housing</b>	Aluminium
SL-DL-243-24w-S-N.WHT		4000K	165 x 165	50	Φ155 x 155	2880 lm		<b>LED Make</b>	Bridgelux
SL-DL-243-24w-S-WHT		6500K				3000 lm		<b>Driver Brands</b>	Fulham / HR
								<b>Dimming</b>	Triac / 0-10v / Dali

### Beam Angle



## DOWN LIGHT

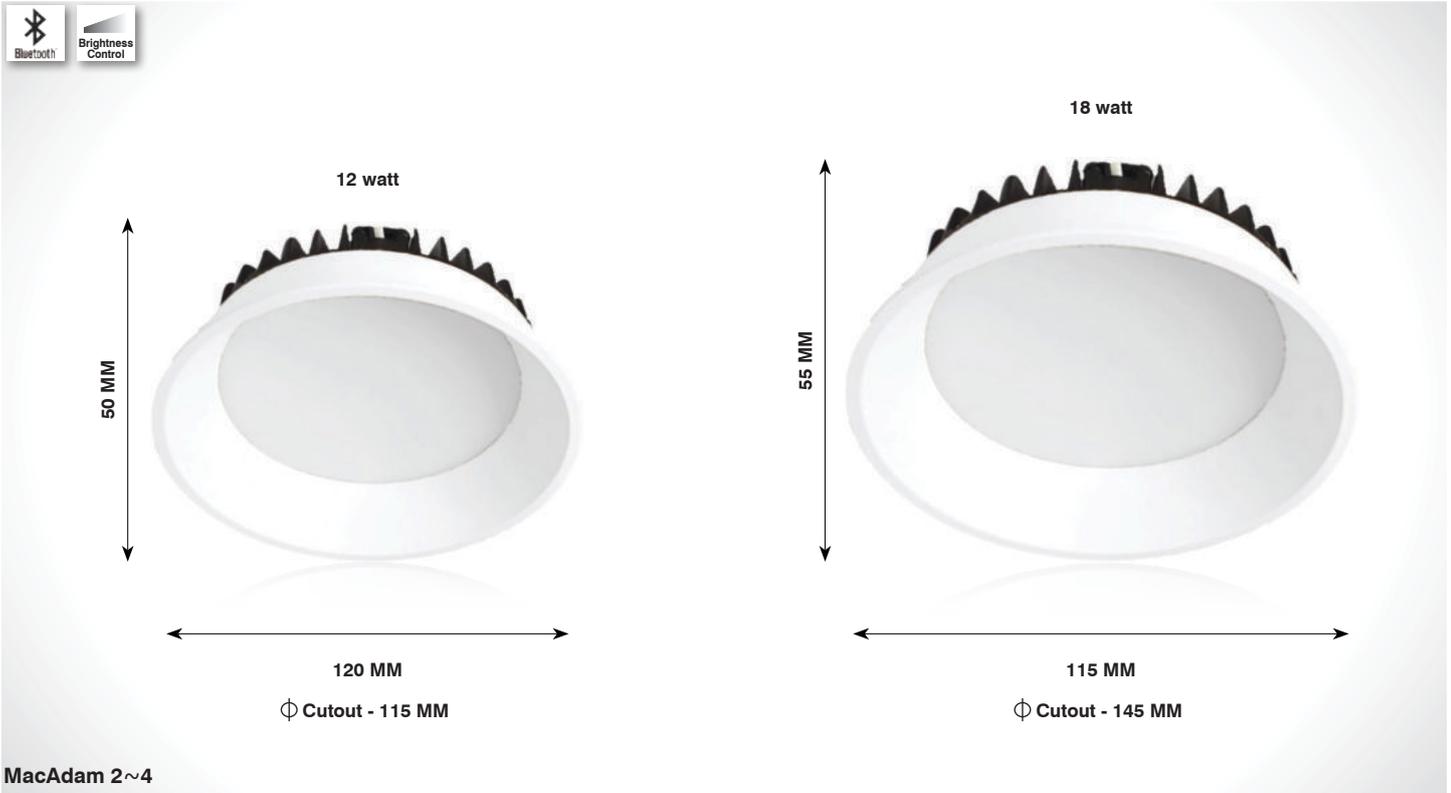


## GARISH




Product Code	CRI	CCT	Dimension (in mm)			Lumen	Driver Opt	System Specs	
			Diameter	Height	Cutout			Housing	
SL-DL-289-12w-R-W.WHT	80 / 90	3000K				1320 lm	30-40V@300mA	Aluminium	
SL-DL-289-12w-R-N.WHT		4000K	120	50	∅115	1440 lm		Bridgelux	
SL-DL-289-12w-R-WHT		6500K				1500 lm		Srishti / Philips / Bag	
								Triac / 0-10v / Dali	
SL-DL-289-18w-R-W.WHT	80 / 90	3000K				1980 lm	50-65V@300mA	Aluminium	
SL-DL-289-18w-R-N.WHT		4000K	115	55	∅145	2160 lm		Bridgelux	
SL-DL-289-18w-R-WHT		6500K				2250 lm		Srishti	
								Triac / 0-10v / Dali	

Beam Angle







## DOWN LIGHT

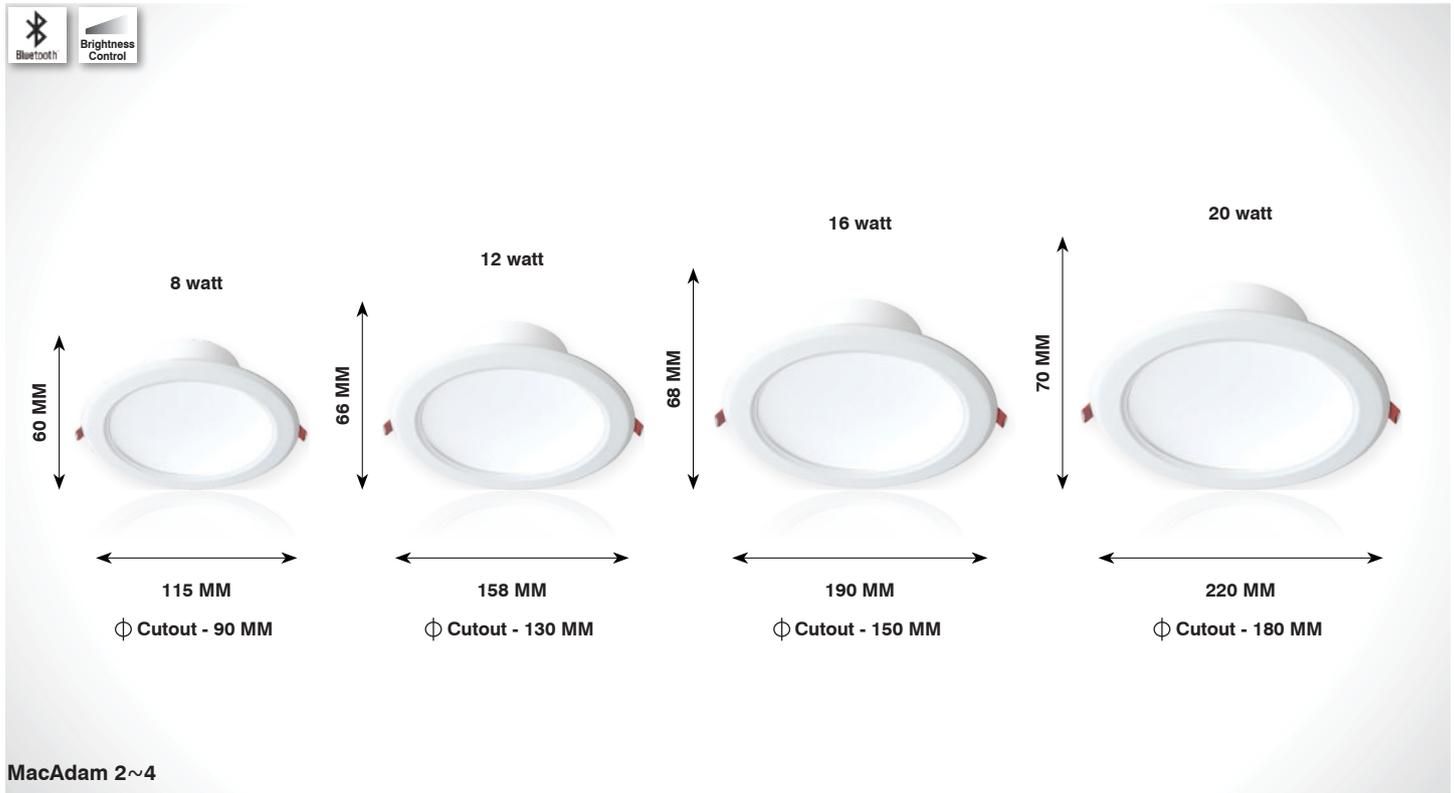

## SONET

Product Code	CRI	CCT	Dimension (in mm)			Lumen	Driver Opt	System Specs	
			Diameter	Height	Cutout			Housing	LED Make
SL-DL-26-8w-R-W.WHT	80	3000K				880 lm	16-28V@300mA	Aluminium	
SL-DL-26-8w-R-N.WHT		4000K	115	60	φ 90	960 lm		Samsung	
SL-DL-26-8w-R-WHT		6500K				1000 lm		Srishti	
SL-DL-27-12w-R-W.WHT	80	3000K				1320 lm	27-40V@300mA	Aluminium	
SL-DL-27-12w-R-N.WHT		4000K	158	66	φ130	1440 lm		Samsung	
SL-DL-27-12w-R-WHT		6500K				1500 lm		Srishti	
SL-DL-28-16w-R-W.WHT	80	3000K				1760 lm	40-65V@300mA	Aluminium	
SL-DL-28-16w-R-N.WHT		4000K	190	68	φ150	1920 lm		Samsung	
SL-DL-28-16w-R-WHT		6500K				2000 lm		Srishti	
SL-DL-29-20w-R-W.WHT	80	3000K				2200 lm	40-65V@300mA	Aluminium	
SL-DL-29-20w-R-N.WHT		4000K	220	70	φ180	2400 lm		Samsung	
SL-DL-29-20w-R-WHT		6500K				2500 lm		Srishti	

### Beam Angle



On request also available in CCT - 2700K / 3500K / 5000K , CRI - 95+  
Also Available in Dali DT8 / DT6 / Tuya Smart

## DOWN LIGHT SERIES



Available Body Colour : Black / White

## LE MOS



IP65

TUNABLE


DIMMABLE

Product Code	CRI	CCT	Dimension (in mm)			Lumen	Driver Opt	System Specs	
SL-DL-314-10w-R-W.WHT	80 / 90	3000K	Diameter	Height	Cutout	1100 lm	36-40V@200mA	<b>Housing</b>	Aluminium
SL-DL-314-10w-R-N.WHT		4000K	90	90	∅60	1200 lm		<b>LED Make</b>	Cree / Bridgelux
SL-DL-314-10w-R-WHT		6500K				1250 lm		<b>Driver Brands</b>	Philips / Fulham / Bag
								<b>Dimming</b>	Triac / 0-10v / Dali
SL-DL-314-15w-R-W.WHT	80 / 90	3000K	Diameter	Height	Cutout	1650 lm	36-42V@350mA	<b>Housing</b>	Aluminium
SL-DL-314-15w-R-N.WHT		4000K	90	90	∅60	1800 lm		<b>LED Make</b>	Cree / Bridgelux
SL-DL-314-15w-R-WHT		6500K				1875 lm		<b>Driver Brands</b>	Philips / Fulham / Bag
								<b>Dimming</b>	Triac / 0-10v / Dali

Beam Angle



## DOWN LIGHT SERIES

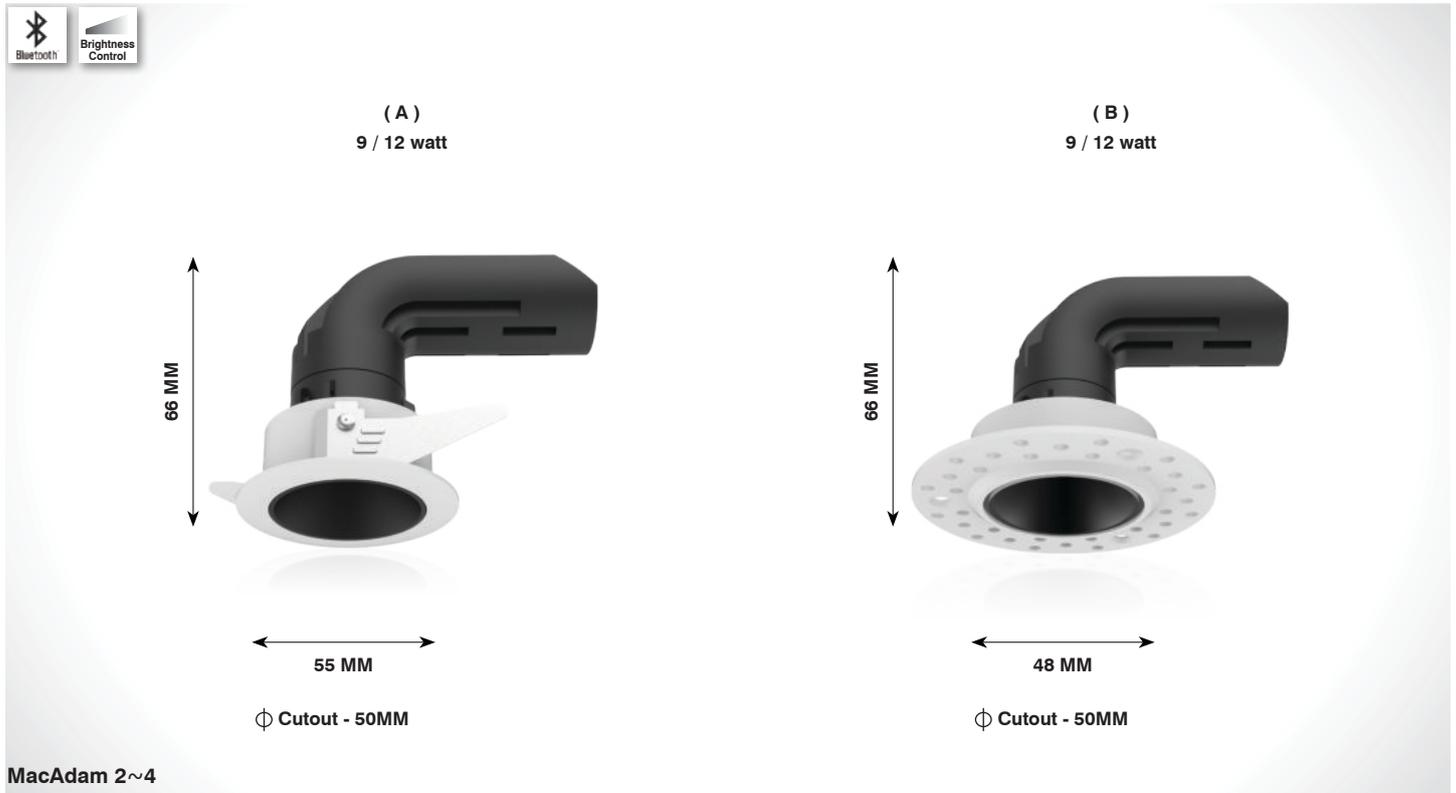


### Recessed Lighting

## ZEFI A




Product Code	CRI	CCT	Dimension (in mm)			Lumen	Driver Opt	System Specs	
SL-DL-318-9w-R-W.WHT	80 / 90	3000K	Diameter	Height	Cutout	990 lm	36-42@200mA	<b>Housing</b>	Aluminium
SL-DL-318-9w-R-N.WHT		4000K	55	66	Ø50	1080 lm		<b>LED Make</b>	Cree
SL-DL-318-9w-R-W.WHT		6500K				1125 lm		<b>Driver Brands</b>	Srishti
								<b>Dimming</b>	Triac / 0-10v / Dali
SL-DL-318-12w-R-W.WHT	80 / 90	3000K	Diameter	Height	Cutout	1320 lm	36-42@300mA	<b>Housing</b>	Aluminium
SL-DL-318-12w-R-N.WHT		4000K	55	66	Ø50	1440 lm		<b>LED Make</b>	Cree
SL-DL-318-12w-R-W.WHT		6500K				1500 lm		<b>Driver Brands</b>	Srishti
								<b>Dimming</b>	Triac / 0-10v / Dali

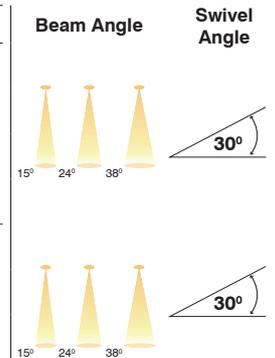


## ZEFI B

Product Code	CRI	CCT	Dimension (in mm)			Lumen	Driver Opt	System Specs	
SL-DL-319-9w-R-W.WHT	80 / 90	3000K	Diameter	Height	Cutout	990 lm	36-42@200mA	<b>Housing</b>	Aluminium
SL-DL-319-9w-R-N.WHT		4000K	48	66	Ø50	1080 lm		<b>LED Make</b>	Cree
SL-DL-319-9w-R-W.WHT		6500K				1125 lm		<b>Driver Brands</b>	Srishti
								<b>Dimming</b>	Triac / 0-10v / Dali
SL-DL-319-12w-R-W.WHT	80 / 90	3000K	Diameter	Height	Cutout	1320 lm	36-42@300mA	<b>Housing</b>	Aluminium
SL-DL-319-12w-R-N.WHT		4000K	48	66	Ø50	1440 lm		<b>LED Make</b>	Cree
SL-DL-319-12w-R-W.WHT		6500K				1500 lm		<b>Driver Brands</b>	Srishti
								<b>Dimming</b>	Triac / 0-10v / Dali



On request also available in CCT - 2700K / 3500K / 5000K , CRI - 95+  
Also Available in Dali DT8 / DT6 / Tuya Smart

## DOWN LIGHT SERIES

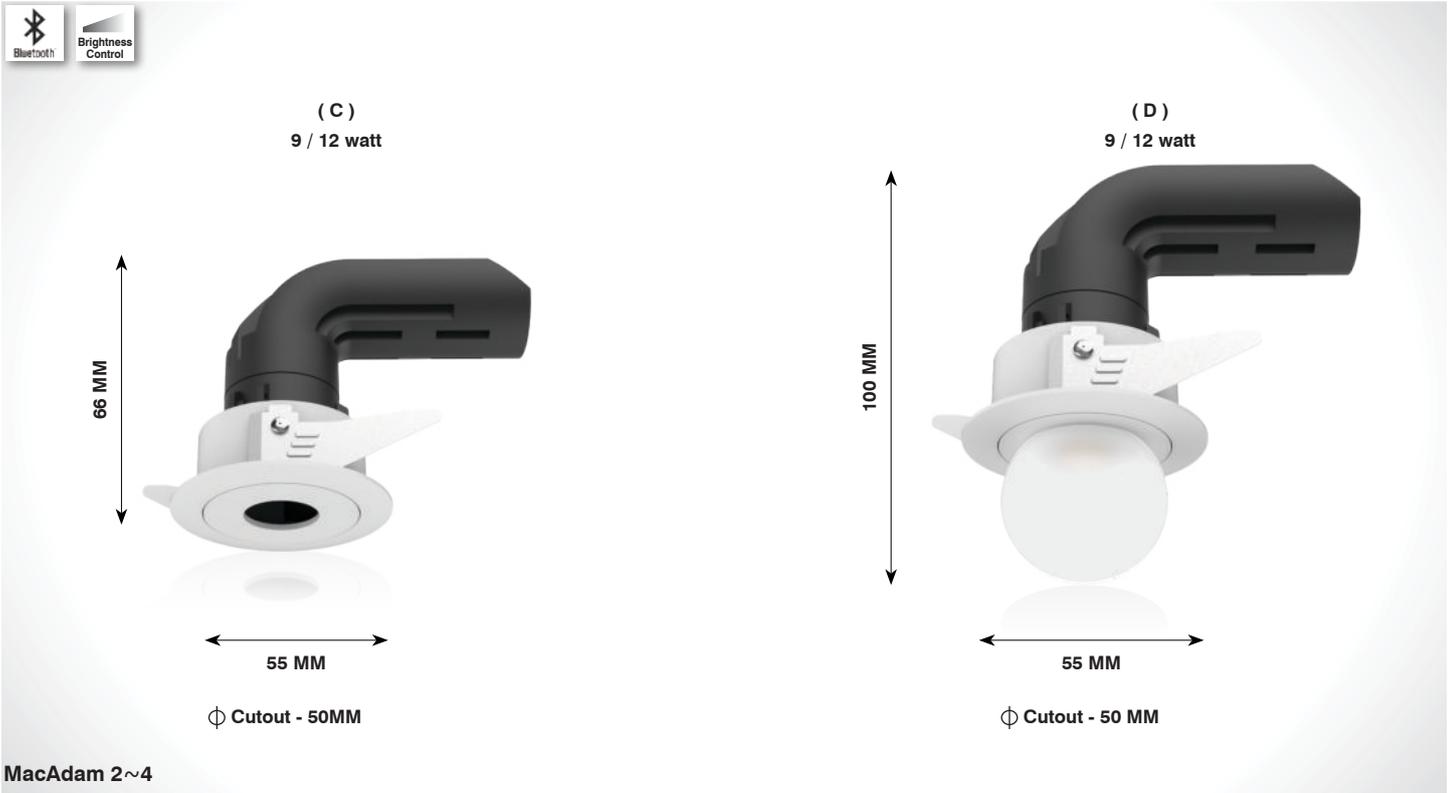


### Recessed Lighting

## Z E F I C




Product Code	CRI	CCT	Dimension (in mm)			Lumen	Driver Opt	System Specs	
SL-DL-320-9w-R-W.WHT	80 / 90	3000K	Diameter	Height	Cutout	990 lm	36-42@200mA	<b>Housing</b>	Aluminium
SL-DL-320-9w-R-N.WHT		4000K	55	66	∅50	1080 lm		<b>LED Make</b>	Cree
SL-DL-320-9w-R-WHT		6500K				1125 lm		<b>Driver Brands</b>	Srishti
								<b>Dimming</b>	Triac / 0-10v / Dali
SL-DL-320-12w-R-W.WHT	80 / 90	3000K	Diameter	Height	Cutout	1320 lm	36-42@300mA	<b>Housing</b>	Aluminium
SL-DL-320-12w-R-N.WHT		4000K	55	66	∅50	1440 lm		<b>LED Make</b>	Cree
SL-DL-320-12w-R-WHT		6500K				1500 lm		<b>Driver Brands</b>	Srishti
								<b>Dimming</b>	Triac / 0-10v / Dali

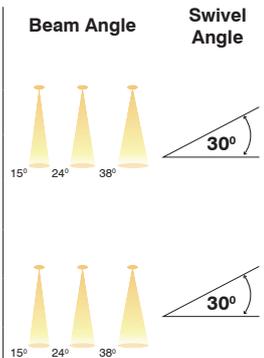


## Z E F I D

Product Code	CRI	CCT	Dimension (in mm)			Lumen	Driver Opt	System Specs	
SL-DL-321-9w-R-W.WHT	80 / 90	3000K	Diameter	Height	Cutout	990 lm	36-42@200mA	<b>Housing</b>	Aluminium
SL-DL-321-9w-R-N.WHT		4000K	55	100	∅50	1080 lm		<b>LED Make</b>	Cree
SL-DL-321-9w-R-WHT		6500K				1125 lm		<b>Driver Brands</b>	Srishti
								<b>Dimming</b>	Triac / 0-10v / Dali
SL-DL-321-12w-R-W.WHT	80 / 90	3000K	Diameter	Height	Cutout	1320 lm	36-42@300mA	<b>Housing</b>	Aluminium
SL-DL-321-12w-R-N.WHT		4000K	55	100	∅50	1440 lm		<b>LED Make</b>	Cree
SL-DL-321-12w-R-WHT		6500K				1500 lm		<b>Driver Brands</b>	Srishti
								<b>Dimming</b>	Triac / 0-10v / Dali



On request also available in CCT - 2700K / 3500K / 5000K , CRI - 95+  
Also Available in Dali DT8 / DT6 / Tuya Smart

## DOWN LIGHT SERIES

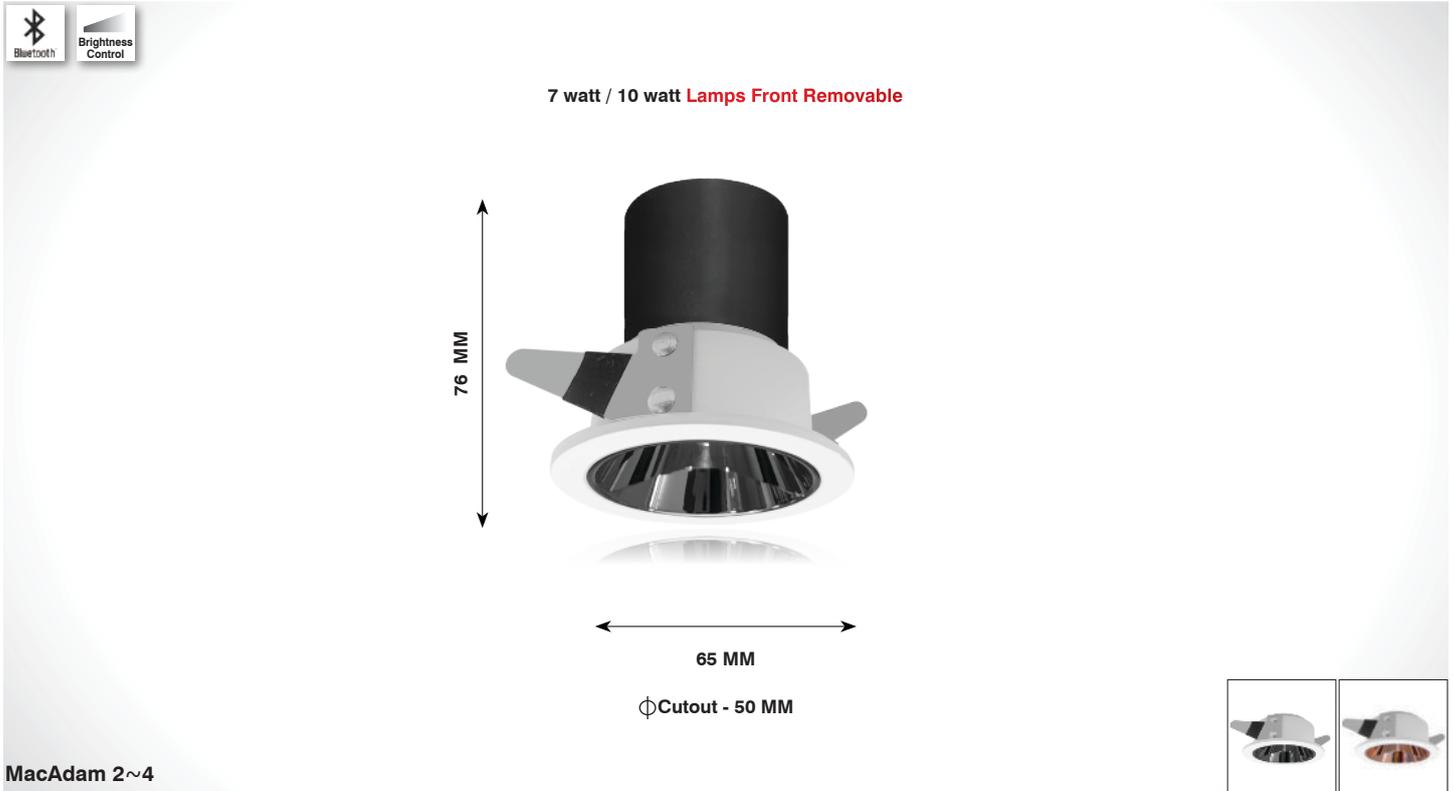



Available Reflector Finish : Chrome / Black / Rose Gold

## SALTO




Product Code	CRI	CCT	Dimension (in mm)			Lumen	Driver Opt	System Specs	
SL-DL-327-7w-R-W.WHT	80 / 90	3000K	Diameter	Height	Cutout	770 lm	36-42V@150mA	<b>Housing</b>	Aluminium
SL-DL-327-7w-R-N.WHT		4000K	65	76	∅55	840 lm		<b>LED Make</b>	Cree
SL-DL-327-7w-R-WHT		6500K				875 lm		<b>Driver Brands</b>	Philips / Bag
								<b>Dimming</b>	Triac / 0-10v / Dali
SL-DL-327-10w-R-W.WHT	80 / 90	3000K	Diameter	Height	Cutout	1100 lm	36-42V@250mA	<b>Housing</b>	Aluminium
SL-DL-327-10w-R-N.WHT		4000K	65	96	∅55	1200 lm		<b>LED Make</b>	Cree
SL-DL-327-10w-R-WHT		6500K				1250 lm		<b>Driver Brands</b>	Philips / Bag
								<b>Dimming</b>	Triac / 0-10v / Dali

### Beam Angle



## DOWN LIGHT SERIES

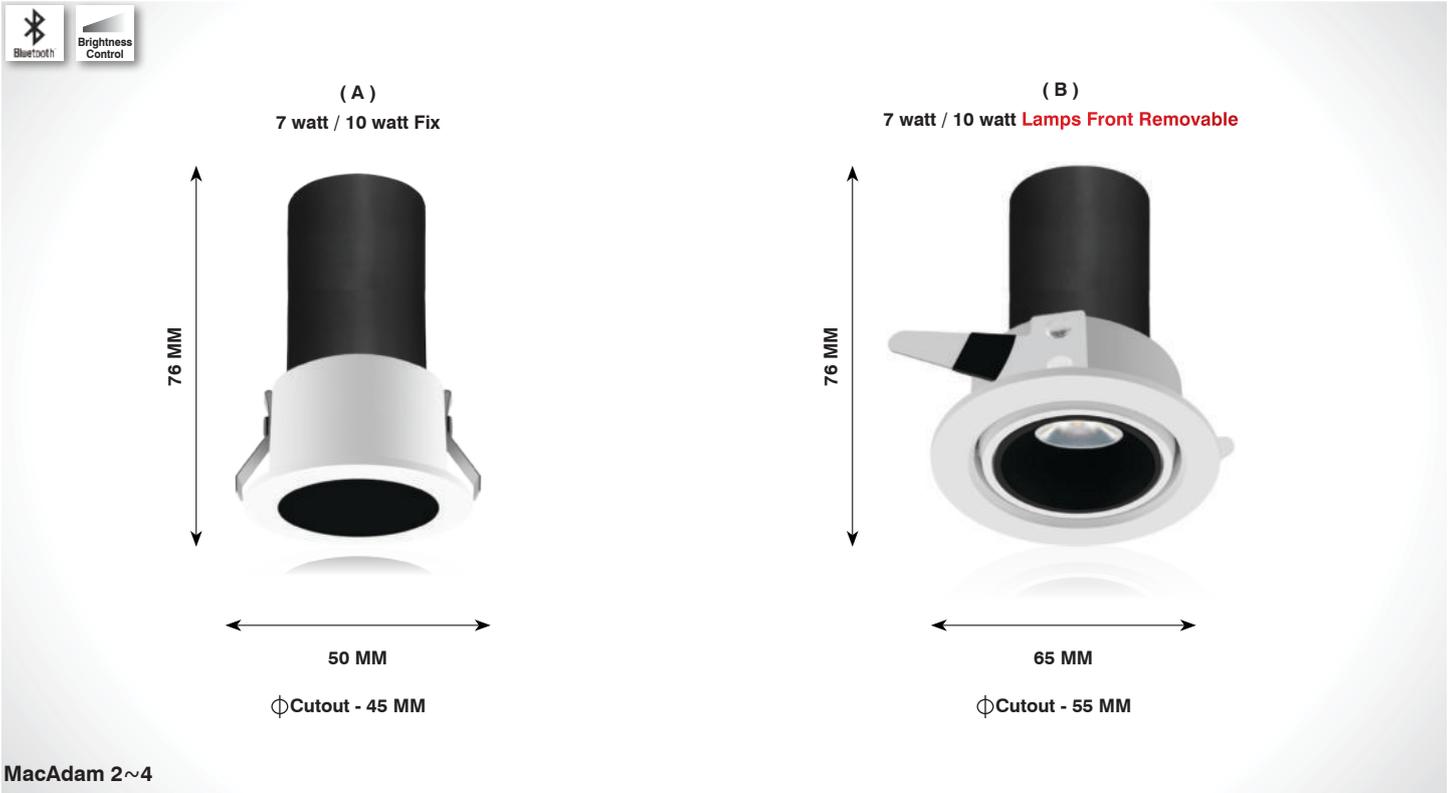


MacAdam 2~4

## TENZA A



Product Code	CRI	CCT	Dimension (in mm)			Lumen	Driver Opt	System Specs	
SL-DL-328-7w-R-W.WHT	80 / 90	3000K	Diameter	Height	Cutout	770 lm	36-42V@150mA	<b>Housing</b>	Aluminium
SL-DL-328-7w-R-N.WHT		4000K	50	76	Ø45	840 lm		<b>LED Make</b>	Cree
SL-DL-328-7w-R-WHT		6500K				875 lm		<b>Driver Brands</b>	Philips / Bag
								<b>Dimming</b>	Triac / 0-10v / Dali
SL-DL-328-10w-R-W.WHT	80 / 90	3000K	Diameter	Height	Cutout	1100 lm	36-42V@250mA	<b>Housing</b>	Aluminium
SL-DL-328-10w-R-N.WHT		4000K	50	96	Ø45	1200 lm		<b>LED Make</b>	Cree
SL-DL-328-10w-R-WHT		6500K				1250 lm		<b>Driver Brands</b>	Philips / Bag
								<b>Dimming</b>	Triac / 0-10v / Dali

Beam Angle




## TENZA B






Product Code	CRI	CCT	Dimension (in mm)			Lumen	Driver Opt	System Specs	
SL-DL-329-7w-R-W.WHT	80 / 90	3000K	Diameter	Height	Cutout	770 lm	36-42V@150mA	<b>Housing</b>	Aluminium
SL-DL-329-7w-R-N.WHT		4000K	65	76	Ø55	840 lm		<b>LED Make</b>	Cree
SL-DL-329-7w-R-WHT		6500K				875 lm		<b>Driver Brands</b>	Philips / Bag
								<b>Dimming</b>	Triac / 0-10v / Dali
SL-DL-329-10w-R-W.WHT	80 / 90	3000K	Diameter	Height	Cutout	1100 lm	36-42V@250mA	<b>Housing</b>	Aluminium
SL-DL-329-10w-R-N.WHT		4000K	65	96	Ø55	1200 lm		<b>LED Make</b>	Cree
SL-DL-329-10w-R-WHT		6500K				1250 lm		<b>Driver Brands</b>	Philips / Bag
								<b>Dimming</b>	Triac / 0-10v / Dali

Beam Angle



Swivel Angle



On request also available in CCT - 2700K / 3500K / 5000K , CRI - 95+  
Also Available in Dali DT8 / DT6 / Tuya Smart

Application



## DOWN LIGHT SERIES




## JORJE




Product Code	CRI	CCT	Dimension (in mm)		Lumen	Driver Opt	System Specs	
SL-DL-330-2x7w-R-W.WHT	80 / 90	3000K	Diameter	Height	1540 lm	36-42V@300mA	<b>Housing</b>	Aluminium
SL-DL-330-2x7w-R-N.WHT		4000K	121x65	76	1680 lm		<b>LED Make</b>	Cree
SL-DL-330-2x7w-R-WHT		6500K			1750 lm		<b>Driver Brands</b>	Philips
							<b>Dimming</b>	Triac / 0-10v / Dali

Product Code	CRI	CCT	Dimension (in mm)		Lumen	Driver Opt	System Specs	
SL-DL-330-2x10w-R-W.WHT	80 / 90	3000K	Diameter	Height	2200 lm	36-42V@300mA	<b>Housing</b>	Aluminium
SL-DL-330-2x10w-R-N.WHT		4000K	121x65	103	2400 lm		<b>LED Make</b>	Cree
SL-DL-330-2x10w-R-WHT		6500K			2500 lm		<b>Driver Brands</b>	Philips
							<b>Dimming</b>	Triac / 0-10v / Dali

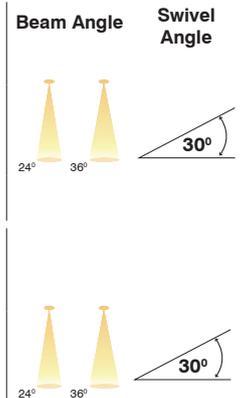

## DOWN LIGHT SERIES

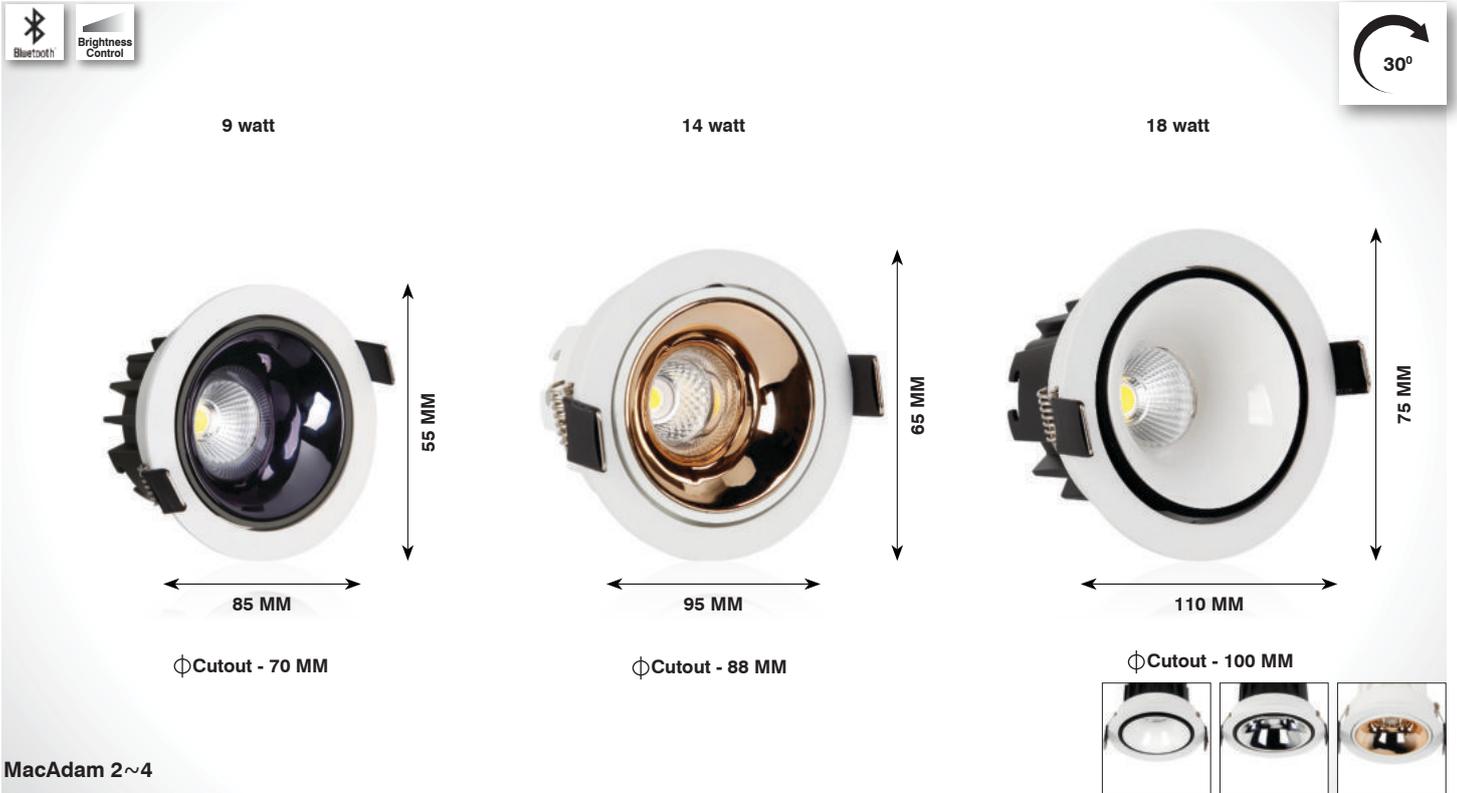


MacAdam 2~4

Available Body Colour : White / Chrome / Copper / Gun Metal

## OCTRA



Product Code	CRI	CCT	Dimension (in mm)			Lumen	Driver Opt	System Specs	
SL-DL-338-9w-R-W.WHT	80 / 90	3000K	Diameter	Height	Cutout	990 lm	36-40V@200mA	<b>Housing</b>	Aluminium
SL-DL-338-9w-R-N.WHT		4000K	85	55	Ø70	1080 lm		<b>LED Make</b>	Cree / Bridgelux
SL-DL-338-9w-R-WHT		6500K				1125 lm		<b>Driver Brands</b>	Philips / Fulham / Bag
								<b>Dimming</b>	Triac / 0-10v / Dali
SL-DL-338-14w-R-W.WHT	80 / 90	3000K	Diameter	Height	Cutout	1540 lm	36-42V@300mA	<b>Housing</b>	Aluminium
SL-DL-338-14w-R-N.WHT		4000K	95	65	Ø88	1680 lm		<b>LED Make</b>	Cree / Bridgelux
SL-DL-338-14w-R-WHT		6500K				1750 lm		<b>Driver Brands</b>	Philips / Fulham / Bag
								<b>Dimming</b>	Triac / 0-10v / Dali
SL-DL-338-18w-R-W.WHT	80 / 90	3000K	Diameter	Height	Cutout	1980 lm	36-42V@400mA	<b>Housing</b>	Aluminium
SL-DL-338-18w-R-N.WHT		4000K	110	75	Ø100	2160 lm		<b>LED Make</b>	Cree / Bridgelux
SL-DL-338-18w-R-WHT		6500K				2250 lm		<b>Driver Brands</b>	Fulham
								<b>Dimming</b>	Triac / 0-10v / Dali

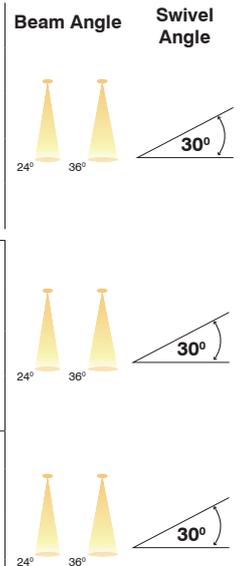

On request also available in CCT - 2700K / 3500K / 5000K , CRI - 95+  
Also Available in Dali DT8 / DT6 / Tuya Smart

## DOWN LIGHT SERIES



Available Body Colour : Gun Metal / Rose Gold / White





## O Z I



Product Code	CRI	CCT	Dimension (in mm)			Lumen	Driver Opt	System Specs	
SL-DL-331-10w-R-W.WHT	80 / 90	3000K	Diameter	Height	Cutout	1100 lm	36-40V@200mA	<b>Housing</b>	Aluminium
SL-DL-331-10w-R-N.WHT		4000K	65	63	Ø55	1200 lm		<b>LED Make</b>	Cree / Bridgelux
SL-DL-331-10w-R-WHT		6500K				1250 lm		<b>Driver Brands</b>	Philips / Fulham / Bag
								<b>Dimming</b>	Triac / 0-10v / Dali
SL-DL-331-15w-R-W.WHT	80 / 90	3000K	Diameter	Height	Cutout	1650 lm	36-42V@350mA	<b>Housing</b>	Aluminium
SL-DL-331-15w-R-N.WHT		4000K	85	94	Ø75	1800 lm		<b>LED Make</b>	Cree / Bridgelux
SL-DL-331-15w-R-WHT		6500K				1875 lm		<b>Driver Brands</b>	Philips / Fulham / Bag
								<b>Dimming</b>	Triac / 0-10v / Dali

### Beam Angle



## DOWN LIGHT SERIES




MacAdam 2~4

30° Tiltable / 355° Movable


## ACTO



Product Code	CRI	CCT	Dimension (in mm)			Lumen	Driver Opt	System Specs	
SL-DL-344-12w-R-W.WHT	80 / 90	3000K	Diameter	Height	Cutout	1320 lm	36-40V@200mA	<b>Housing</b>	Aluminium
SL-DL-344-12w-R-N.WHT		4000K	82	92	Ø75	1440 lm		<b>LED Make</b>	Cree / Bridgelux
SL-DL-344-12w-R-WHT		6500K				1500 lm		<b>Driver Brands</b>	Philips / Fulham / Bag
								<b>Dimming</b>	Triac / 0-10v / Dali
SL-DL-344-15w-R-W.WHT	80 / 90	3000K	Diameter	Height	Cutout	1650 lm	36-42V@350mA	<b>Housing</b>	Aluminium
SL-DL-344-15w-R-N.WHT		4000K	82	92	Ø75	1800 lm		<b>LED Make</b>	Cree / Bridgelux
SL-DL-344-15w-R-WHT		6500K				1875 lm		<b>Driver Brands</b>	Philips / Fulham / Bag
								<b>Dimming</b>	Triac / 0-10v / Dali

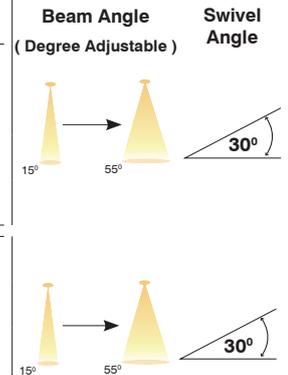

## DOWN LIGHT SERIES

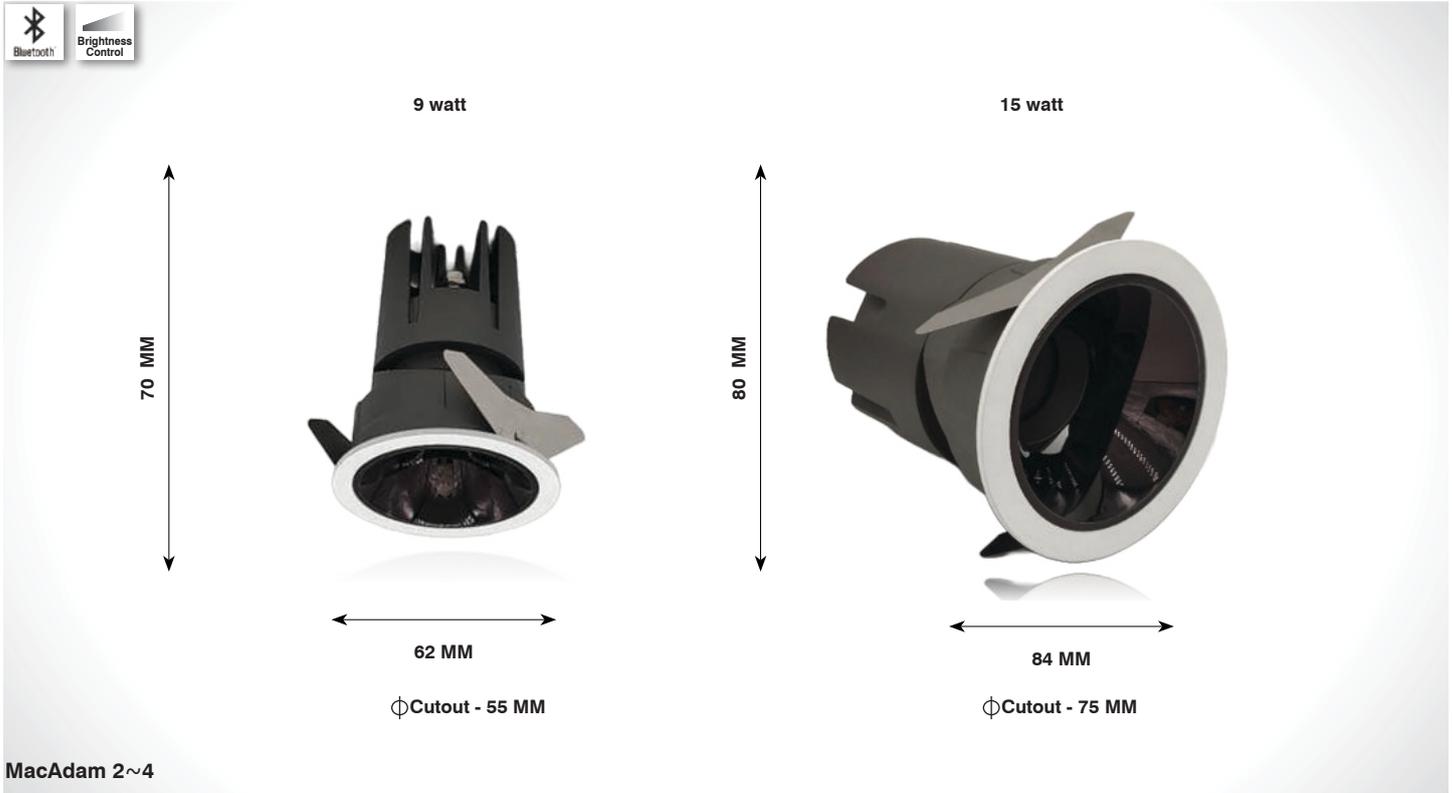


30° Tilttable / 355° Movable

## ELDA

IP65



Product Code	CRI	CCT	Dimension (in mm)			Lumen	Driver Opt	System Specs	
SL-DL-345-9w-R-W.WHT	80 / 90	3000K	Diameter	Height	Cutout	990 lm	36-40V@200mA	<b>Housing</b>	Aluminium
SL-DL-345-9w-R-N.WHT		4000K	62	70	Ø55	1080 lm		<b>LED Make</b>	Cree / Bridgelux
SL-DL-345-9w-R-WHT		6500K				1125 lm		<b>Driver Brands</b>	Philips / Fulham / Bag
								<b>Dimming</b>	Triac / 0-10v / Dali
SL-DL-345-15w-R-W.WHT	80 / 90	3000K	Diameter	Height	Cutout	1650 lm	36-42V@350mA	<b>Housing</b>	Aluminium
SL-DL-345-15w-R-N.WHT		4000K	84	80	Ø75	1800 lm		<b>LED Make</b>	Cree / Bridgelux
SL-DL-345-15w-R-WHT		6500K				1875 lm		<b>Driver Brands</b>	Philips / Fulham / Bag
								<b>Dimming</b>	Triac / 0-10v / Dali

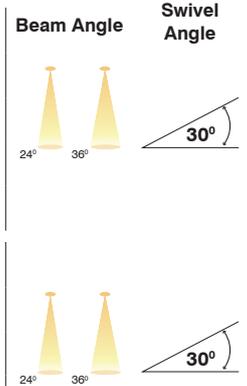

## DOWN LIGHT SERIES



MacAdam 2~4




Available Body Finish : White / Black

## BLAZE



Product Code	CRI	CCT	Dimension (in mm)			Lumen	Driver Opt	System Specs	
SL-DL-358-8w-R-W.WHT	80 / 90	3000K	Diameter	Height	Cutout	880 lm	36-42V@200mA	<b>Housing</b>	Aluminium
SL-DL-358-8w-R-N.WHT		4000K	40	72	Ø35	960 lm		<b>LED Make</b>	Cree / Bridgelux
SL-DL-358-8w-R-WHT		6500K				1000 lm		<b>Driver Brands</b>	Philips / Bag / Fulham
								<b>Dimming</b>	Triac / 0-10v / Dali
SL-DL-358-10w-R-W.WHT	80 / 90	3000K	Diameter	Height	Cutout	1100 lm	36-42V@250mA	<b>Housing</b>	Aluminium
SL-DL-358-10w-R-N.WHT		4000K	45	86	Ø40	1200 lm		<b>LED Make</b>	Cree / Bridgelux
SL-DL-358-10w-R-WHT		6500K				1225 lm		<b>Driver Brands</b>	Philips / Bag / Fulham
								<b>Dimming</b>	Triac / 0-10v / Dali
SL-DL-358-15w-R-W.WHT	80 / 90	3000K	Diameter	Height	Cutout	1650 lm	36-42V@350mA	<b>Housing</b>	Aluminium
SL-DL-358-15w-R-N.WHT		4000K	50	99	Ø45	1800 lm		<b>LED Make</b>	Cree / Bridgelux
SL-DL-358-15w-R-WHT		6500K				1875 lm		<b>Driver Brands</b>	Philips / Bag / Fulham
								<b>Dimming</b>	Triac / 0-10v / Dali

### Beam Angle



On request also available in CCT - 2700K / 3500K / 5000K , CRI - 95+  
Also Available in Dali DT8 / DT6 / Tuya Smart

## DOWN LIGHT SERIES



MacAdam 2~4

Available Body Finish : Black / White / Shiny Black




## R E X

Trimless  
Front Removable



Product Code	CRI	CCT	Dimension (in mm)			Lumen	Driver Opt	System Specs	
			Diameter	Height	Cutout			Housing	Aluminium
SL-DL-359-7w-R-W.WHT	80 / 90	3000K	70	52	φ 45	770 lm	36-42V@150mA	<b>LED Make</b>	Cree / Bridgelux
SL-DL-359-7w-R-N.WHT		4000K				840 lm		<b>Driver Brands</b>	Bag / Fulham / Philips
SL-DL-359-7w-R-WHT		6500K				875 lm		<b>Dimming</b>	Triac / 0-10v / Dali
SL-DL-359-14w-R-W.WHT	80 / 90	3000K	85	66	φ 55	1540 lm	36-42V@300mA	<b>Housing</b>	Aluminium
SL-DL-359-14w-R-N.WHT		4000K				1680 lm		<b>LED Make</b>	Cree / Bridgelux
SL-DL-359-14w-R-WHT		6500K				1750 lm		<b>Driver Brands</b>	Bag / Fulham / Philips
								<b>Dimming</b>	Triac / 0-10v / Dali
SL-DL-359-18w-R-W.WHT	80 / 90	3000K	108	85	φ 75	1980 lm	36-42V@400/450mA	<b>Housing</b>	Aluminium
SL-DL-359-18w-R-N.WHT		4000K				2160 lm		<b>LED Make</b>	Cree / Bridgelux
SL-DL-359-18w-R-WHT		6500K				2250 lm		<b>Driver Brands</b>	Fulham
								<b>Dimming</b>	Triac / 0-10v / Dali


Beam Angle



On request also available in CCT - 2700K / 3500K / 5000K , CRI - 95+  
Also Available in Dali DT8 / DT6 / Tuya Smart

## DOWN LIGHT SERIES

**NEW**

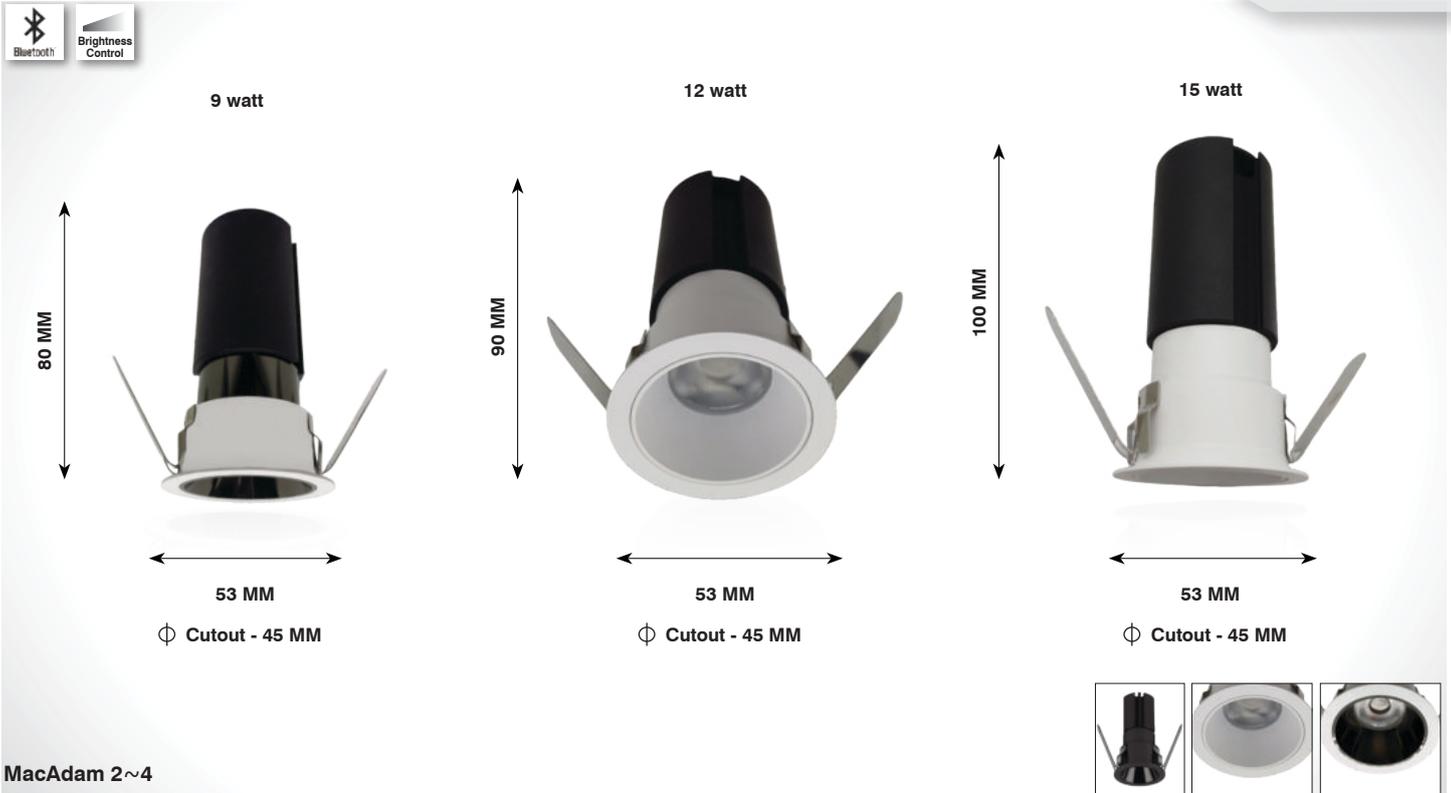




Available Reflector Finish : White / Black/ Titanium Black

## BLAKE




Product Code	CRI	CCT	Dimension (in mm)			Lumen	Driver Opt	System Specs	
SL-DL-370-9w-R-W.WHT	80 / 90	3000K	Diameter	Height	Cutout	990 lm	36-42V@200mA	<b>Housing</b>	Aluminium
SL-DL-370-9w-R-N.WHT		4000K	53	80	φ 45	1080 lm		<b>LED Make</b>	Cree / Bridgelux
SL-DL-370-9w-R-WHT		6500K				1125 lm		<b>Driver Brands</b>	Osram / Philips / Bag
								<b>Dimming</b>	Triac / 0-10v / Dali
SL-DL-370-12w-R-W.WHT	80 / 90	3000K	Diameter	Height	Cutout	1320 lm	36-42V@300mA	<b>Housing</b>	Aluminium
SL-DL-370-12w-R-N.WHT		4000K	53	90	φ 45	1440 lm		<b>LED Make</b>	Cree / Bridgelux
SL-DL-370-12w-R-WHT		6500K				1500 lm		<b>Driver Brands</b>	Osram / Philips / Bag
								<b>Dimming</b>	Triac / 0-10v / Dali
SL-DL-370-15w-R-W.WHT	80 / 90	3000K	Diameter	Height	Cutout	1650 lm	36-42V@350mA	<b>Housing</b>	Aluminium
SL-DL-370-15w-R-N.WHT		4000K	53	100	φ 45	1800 lm		<b>LED Make</b>	Cree / Bridgelux
SL-DL-370-15w-R-WHT		6500K				1875 lm		<b>Driver Brands</b>	Osram / Philips / Bag
								<b>Dimming</b>	Triac / 0-10v / Dali

Beam Angle



## DOWN LIGHT SERIES

**NEW**

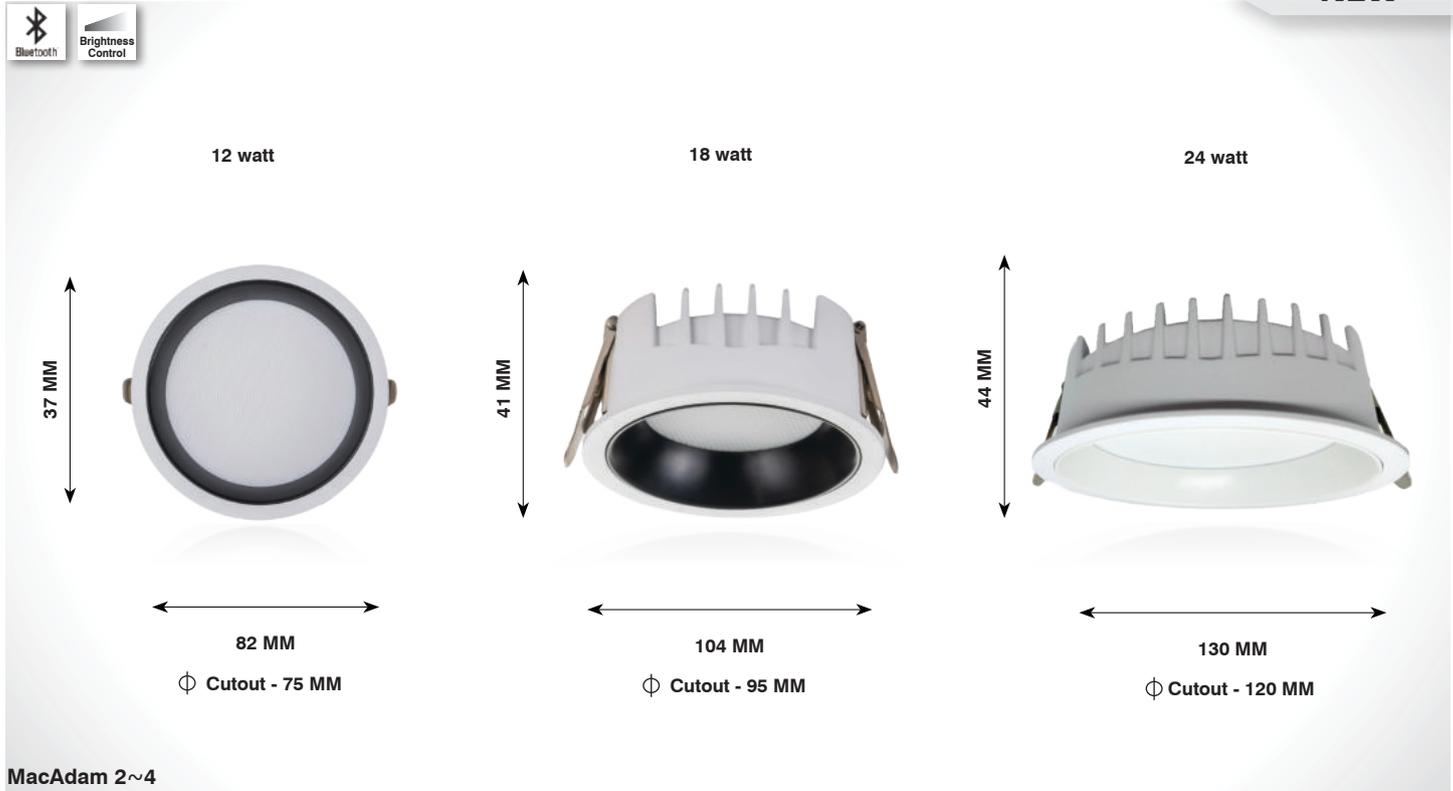




Available Body Finish : White / Black

## VENOZ



Product Code	CRI	CCT	Dimension (in mm)			Lumen	Driver Opt	System Specs	
			Diameter	Height	Cutout			Housing	LED Make
SL-DL-373-12w-R-W.WHT	80 / 90	3000K	82	37	∅ 75	1320 lm	36-42V@300mA	Aluminium	Cree / Bridgelux
SL-DL-373-12w-R-N.WHT		4000K				1440 lm			
SL-DL-373-12w-R-WHT		6500K				1500 lm		Osram / Philips / Bag	
								Triac / 0-10v / Dali	
SL-DL-373-18w-R-W.WHT	80 / 90	3000K	104	41	∅ 95	1980 lm	52-65V@300mA	Aluminium	Cree / Bridgelux
SL-DL-373-18w-R-N.WHT		4000K				2160 lm			
SL-DL-373-18w-R-WHT		6500K				2250 lm		Osram / Fulham	
								Triac / 0-10v / Dali	
SL-DL-373-24w-R-W.WHT	80 / 90	3000K	130	44	∅ 120	2640 lm	52-72V@300mA	Aluminium	Cree / Bridgelux
SL-DL-373-24w-R-N.WHT		4000K				2880 lm			
SL-DL-373-24w-R-WHT		6500K				3000 lm		Osram / Fulham	
								Triac / 0-10v / Dali	

Beam Angle



On request also available in CCT - 2700K / 3500K / 5000K , CRI - 95+  
Also Available in Dali DT8 / DT6 / Tuya Smart

## DOWN LIGHT SERIES

**NEW**



MacAdam 2~4

Available Body Finish : White / Black




## ONYX-A

( IP54 )

TUNABLE DIMMABLE

Product Code	CRI	CCT	Dimension (in mm)			Lumen	Driver Opt	System Specs	
SL-DL-374-10w-R-W.WHT	80 / 90	3000K	Diameter	Height	Cutout	1100 lm	36-42@250mA	<b>Housing</b>	Aluminium
SL-DL-374-10w-R-N.WHT		4000K	50	75	Ø45	1200 lm		<b>LED Make</b>	Cree / Bridgelux
SL-DL-374-10w-R-WHT		6500K				1250 lm		<b>Driver Brands</b>	Osram / Philips / Bag
								<b>Dimming</b>	Triac / 0-10v / Dali
SL-DL-374-12w-R-W.WHT	80 / 90	3000K	Diameter	Height	Cutout	1320 lm	36-42@300mA	<b>Housing</b>	Aluminium
SL-DL-374-12w-R-N.WHT		4000K	50	75	Ø45	1440 lm		<b>LED Make</b>	Cree / Bridgelux
SL-DL-374-12w-R-WHT		6500K				1500 lm		<b>Driver Brands</b>	Osram / Philips / Bag
								<b>Dimming</b>	Triac / 0-10v / Dali
SL-DL-374-15w-R-W.WHT	80 / 90	3000K	Diameter	Height	Cutout	1650 lm	36-42@350mA	<b>Housing</b>	Aluminium
SL-DL-374-15w-R-N.WHT		4000K	64	78	Ø55	1800 lm		<b>LED Make</b>	Cree / Bridgelux
SL-DL-374-15w-R-WHT		6500K				1875 lm		<b>Driver Brands</b>	Osram / Philips / Bag
								<b>Dimming</b>	Triac / 0-10v / Dali

Beam Angle



On request also available in CCT - 2700K / 3500K / 5000K , CRI - 95+  
Also Available in Dali DT8 / DT6 / Tuya Smart

## DOWN LIGHT SERIES

**NEW**



MacAdam 2~4

Available Body Finish : White / Black

## ONYX - B




( IP54 )

TUNABLE

DIMMABLE


Product Code	CRI	CCT	Dimension (in mm)			Lumen	Driver Opt	System Specs	
SL-DL-375-10w-R-W.WHT	80 / 90	3000K	Diameter	Height	Cutout	1100 lm	36-42@250mA	<b>Housing</b>	Aluminium
SL-DL-375-10w-R-N.WHT		4000K	50	77	Ø45	1200 lm		<b>LED Make</b>	Cree / Bridgelux
SL-DL-375-10w-R-WHT		6500K				1250 lm		<b>Driver Brands</b>	Osram / Philips / Bag
								<b>Dimming</b>	Triac / 0-10v / Dali
SL-DL-375-12w-R-W.WHT	80 / 90	3000K	Diameter	Height	Cutout	1320 lm	36-42@300mA	<b>Housing</b>	Aluminium
SL-DL-375-12w-R-N.WHT		4000K	50	77	Ø45	1440 lm		<b>LED Make</b>	Cree / Bridgelux
SL-DL-375-12w-R-WHT		6500K				1500 lm		<b>Driver Brands</b>	Osram / Philips / Bag
								<b>Dimming</b>	Triac / 0-10v / Dali
SL-DL-375-15w-R-W.WHT	80 / 90	3000K	Diameter	Height	Cutout	1650 lm	36-42@350mA	<b>Housing</b>	Aluminium
SL-DL-375-15w-R-N.WHT		4000K	64	78	Ø55	1800 lm		<b>LED Make</b>	Cree / Bridgelux
SL-DL-375-15w-R-WHT		6500K				1875 lm		<b>Driver Brands</b>	Osram / Philips / Bag
								<b>Dimming</b>	Triac / 0-10v / Dali

Beam Angle



## DOWN LIGHT SERIES

**NEW**

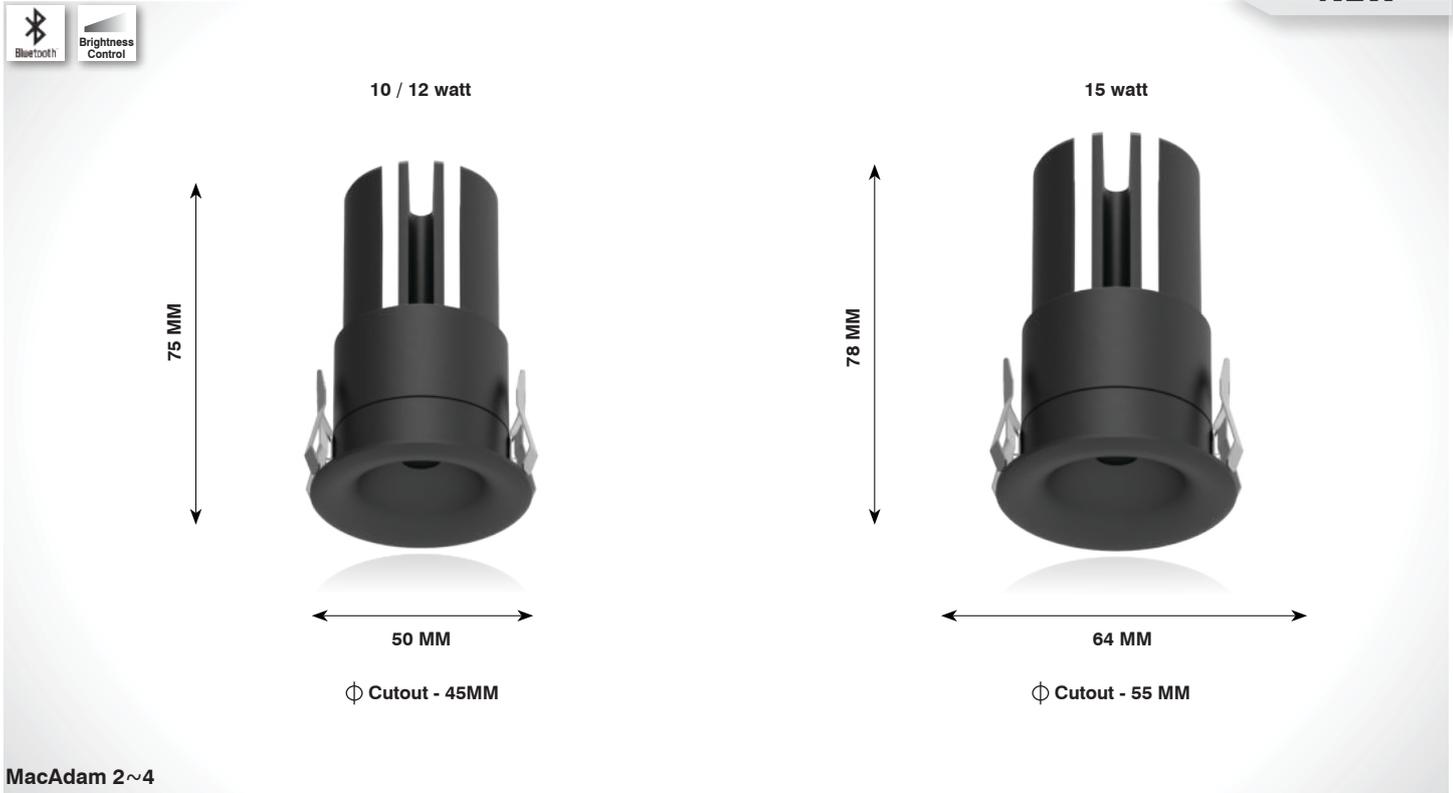

MacAdam 2~4

Available Body Finish : White / Black

## ONYX - C




( IP54 )

TUNABLE

DIMMABLE


Product Code	CRI	CCT	Dimension (in mm)			Lumen	Driver Opt	System Specs	
SL-DL-376-10w-R-W.WHT	80 / 90	3000K	Diameter	Height	Cutout	1100 lm	36-42@250mA	<b>Housing</b>	Aluminium
SL-DL-376-10w-R-N.WHT		4000K	50	75	Ø45	1200 lm		<b>LED Make</b>	Cree / Bridgelux
SL-DL-376-10w-R-WHT		6500K				1250 lm		<b>Driver Brands</b>	Osram / Philips / Bag
								<b>Dimming</b>	Triac / 0-10v / Dali
SL-DL-376-12w-R-W.WHT	80 / 90	3000K	Diameter	Height	Cutout	1320 lm	36-42@300mA	<b>Housing</b>	Aluminium
SL-DL-376-12w-R-N.WHT		4000K	50	75	Ø45	1440 lm		<b>LED Make</b>	Cree / Bridgelux
SL-DL-376-12w-R-WHT		6500K				1500 lm		<b>Driver Brands</b>	Osram / Philips / Bag
								<b>Dimming</b>	Triac / 0-10v / Dali
SL-DL-376-15w-R-W.WHT	80 / 90	3000K	Diameter	Height	Cutout	1650 lm	36-42@350mA	<b>Housing</b>	Aluminium
SL-DL-376-15w-R-N.WHT		4000K	64	78	Ø55	1800 lm		<b>LED Make</b>	Cree / Bridgelux
SL-DL-376-15w-R-WHT		6500K				1875 lm		<b>Driver Brands</b>	Osram / Philips / Bag
								<b>Dimming</b>	Triac / 0-10v / Dali

Beam Angle



## DOWN LIGHT SERIES

**NEW**

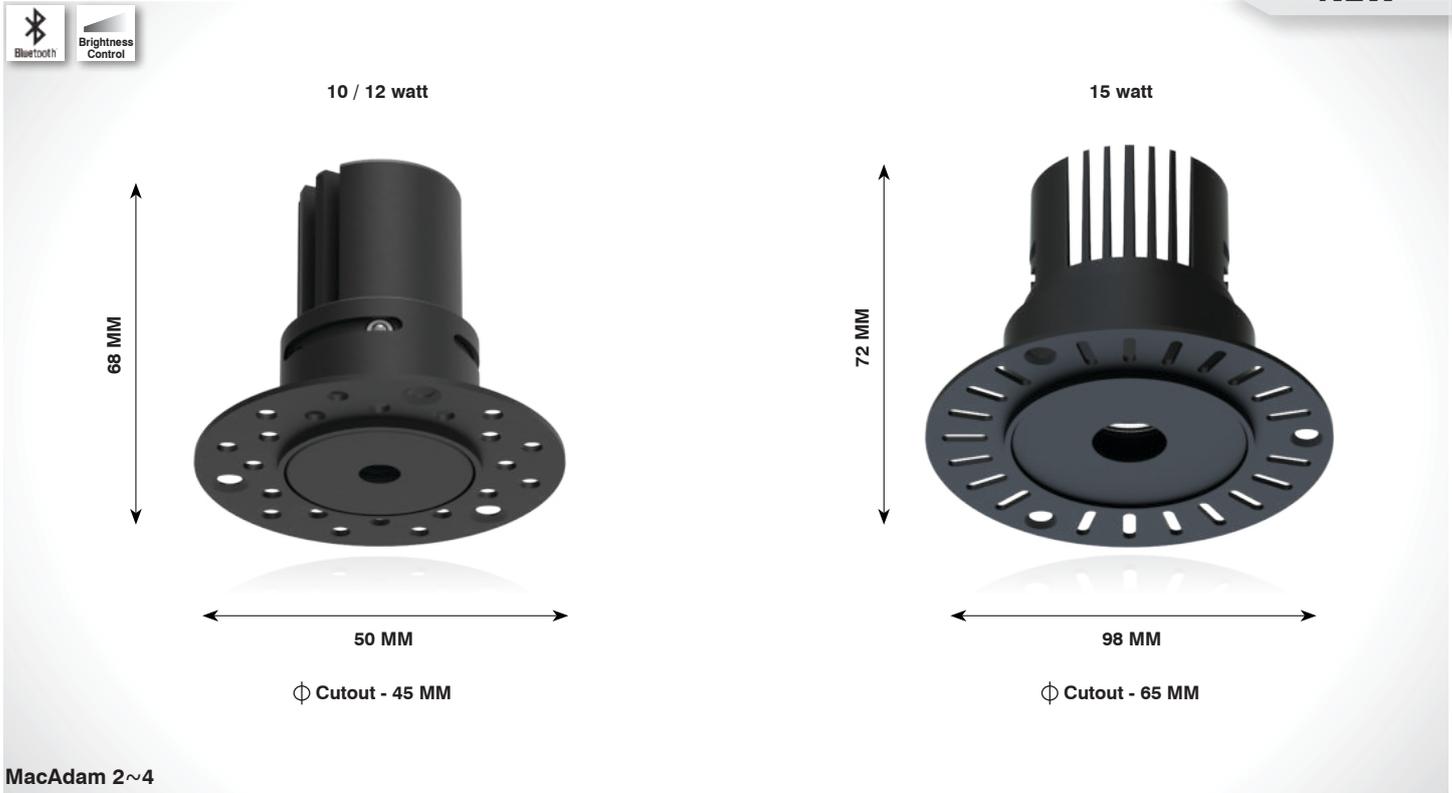

MacAdam 2~4

Available Body Finish : White / Black

## ONYX-D

Trimless




( IP54 )

TUNABLE

DIMMABLE


Product Code	CRI	CCT	Dimension (in mm)			Lumen	Driver Opt	System Specs	
SL-DL-377-10w-R-W.WHT	80 / 90	3000K	Diameter	Height	Cutout	1100 lm	36-42@250mA	<b>Housing</b>	Aluminium
SL-DL-377-10w-R-N.WHT		4000K	50	68	Ø45	1200 lm		<b>LED Make</b>	Cree / Bridgelux
SL-DL-377-10w-R-WHT		6500K				1250 lm		<b>Driver Brands</b>	Osram / Philips / Bag
								<b>Dimming</b>	Triac / 0-10v / Dali
SL-DL-377-12w-R-W.WHT	80 / 90	3000K	Diameter	Height	Cutout	1320 lm	36-42@300mA	<b>Housing</b>	Aluminium
SL-DL-377-12w-R-N.WHT		4000K	50	68	Ø45	1440 lm		<b>LED Make</b>	Cree / Bridgelux
SL-DL-377-12w-R-WHT		6500K				1500 lm		<b>Driver Brands</b>	Osram / Philips / Bag
								<b>Dimming</b>	Triac / 0-10v / Dali
SL-DL-377-15w-R-W.WHT	80 / 90	3000K	Diameter	Height	Cutout	1650 lm	36-42@350mA	<b>Housing</b>	Aluminium
SL-DL-377-15w-R-N.WHT		4000K	98	72	Ø65	1800 lm		<b>LED Make</b>	Cree / Bridgelux
SL-DL-377-15w-R-WHT		6500K				1875 lm		<b>Driver Brands</b>	Osram / Philips / Bag
								<b>Dimming</b>	Triac / 0-10v / Dali

Beam Angle



## DOWN LIGHT SERIES

**NEW**

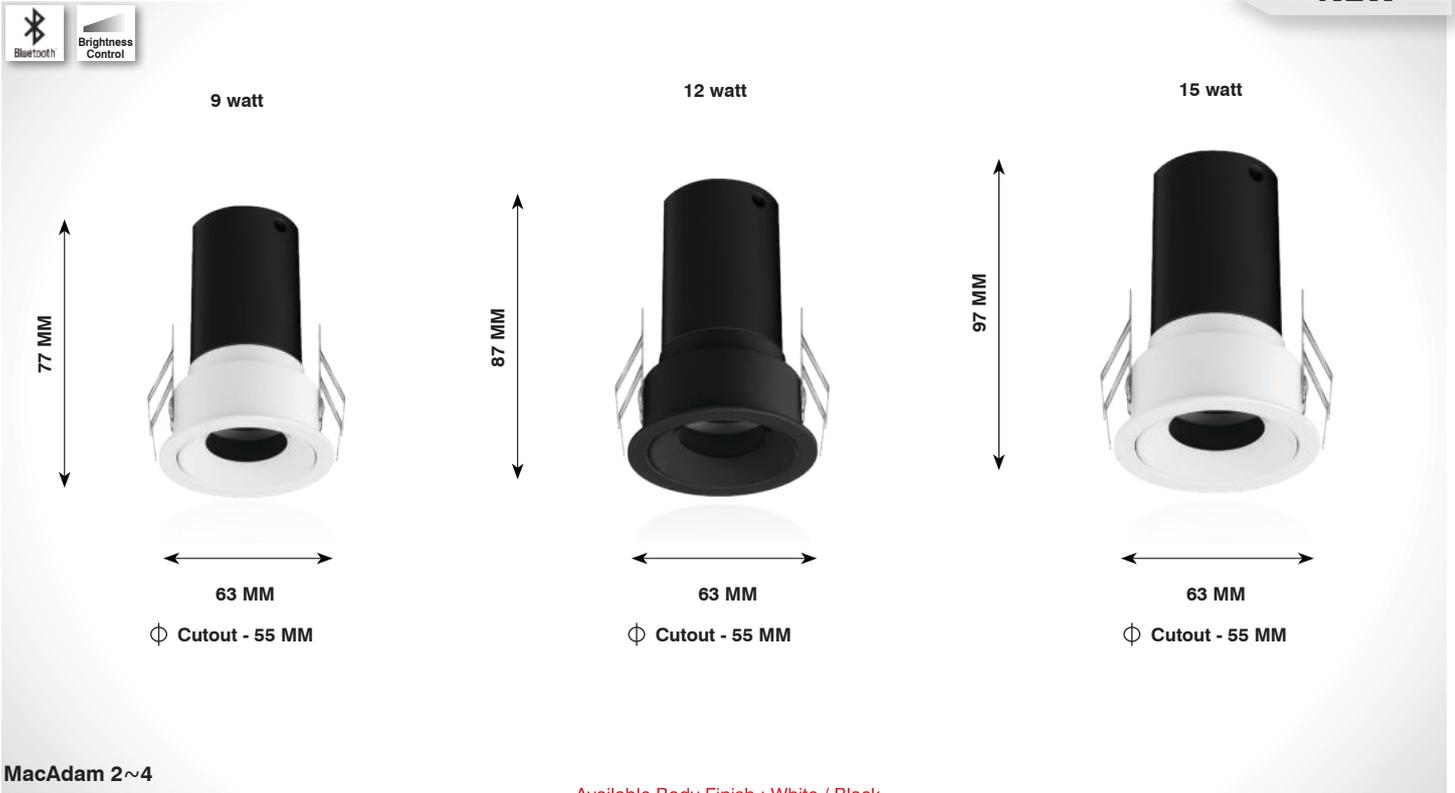

MacAdam 2~4


Available Body Finish : White / Black

## BLING

Front Removable



Product Code	CRI	CCT	Dimension (in mm)			Lumen	Driver Opt	System Specs	
			Diameter	Height	Cutout			Housing	LED Make
SL-DL-378-9w-R-W.WHT	80 / 90	3000K	63	77	φ 55	990 lm	36-42V@200mA	Aluminium	Cree / Bridgelux
SL-DL-378-9w-R-N.WHT		4000K	63	77	φ 55	1080 lm			
SL-DL-378-9w-R-WHT		6500K	63	77	φ 55	1125 lm			
SL-DL-378-12w-R-W.WHT	80 / 90	3000K	63	87	φ 55	1320 lm	36-42V@300mA	Aluminium	Cree / Bridgelux
SL-DL-378-12w-R-N.WHT		4000K	63	87	φ 55	1440 lm			
SL-DL-378-12w-R-WHT		6500K	63	87	φ 55	1500 lm			
SL-DL-378-15w-R-W.WHT	80 / 90	3000K	63	97	φ 55	1650 lm	36-42V@350mA	Aluminium	Cree / Bridgelux
SL-DL-378-15w-R-N.WHT		4000K	63	97	φ 55	1800 lm			
SL-DL-378-15w-R-WHT		6500K	63	97	φ 55	1875 lm			

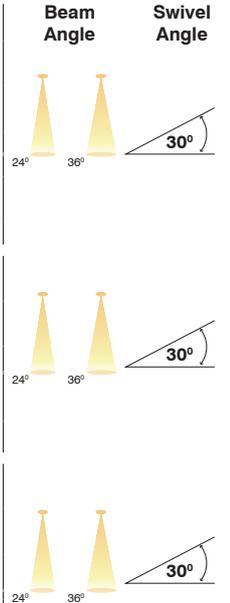

On request also available in CCT - 2700K / 3500K / 5000K , CRI - 95+  
Also Available in Dali DT8 / DT6 / Tuya Smart

## DOWN LIGHT

**7 watt**

77 MM

40 MM

∅ Cutout - 35 MM

**12 watt**

89 MM

50 MM

∅ Cutout - 45 MM

**NEW**

**MacAdam 2~4**



Available Body Finish : White / Shiny Black / Rose Gold

## BISON

Product Code	CRI	CCT	Dimension (in mm)			Lumen	Driver Opt	System Specs	
			Diameter	Height	Cutout			Housing	LED Make
SL-DL-379-7w-R-W.WHT	80 / 90	3000K	40	77	∅ 35	770 lm	36-42V@150mA	Aluminium	Cree / Bridgelux
SL-DL-379-7w-R-N.WHT		4000K				840 lm			Osram / Philips / Bag
SL-DL-379-7w-R-WHT		6500K				875 lm			Triac / 0-10v / Dali
SL-DL-380-12w-R-W.WHT	80 / 90	3000K	50	89	∅ 45	1320 lm	36-42V@300mA	Aluminium	Cree / Bridgelux
SL-DL-380-12w-R-N.WHT		4000K				1440 lm			Osram / Philips / Bag
SL-DL-380-12w-R-WHT		6500K				1500 lm			Triac / 0-10v / Dali




Beam Angle



On request also available in CCT - 2700K / 3500K / 5000K , CRI - 95+  
Also Available in Dali DT8 / DT6 / Tuya Smart

# DOWN LIGHT

**NEW**

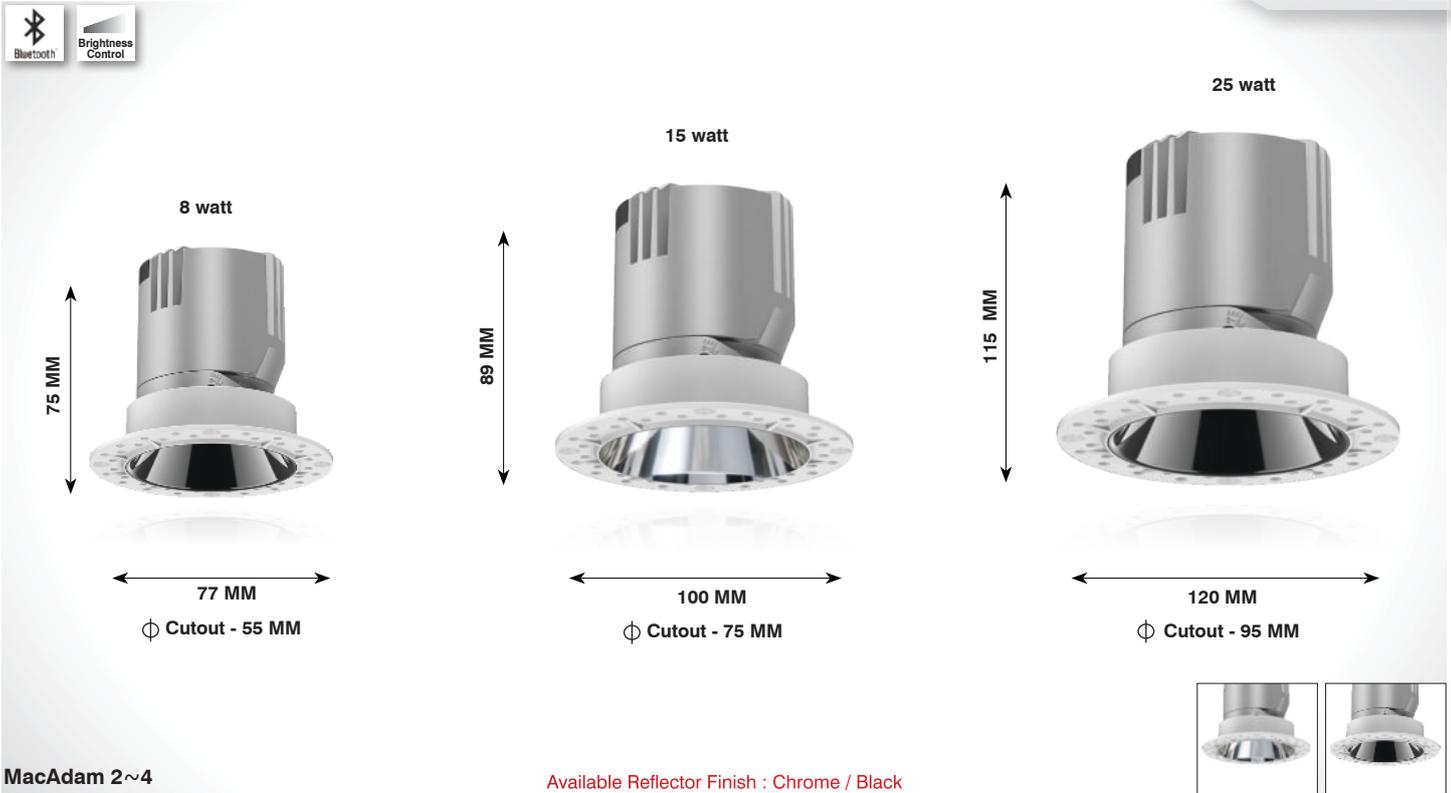

MacAdam 2~4


Available Reflector Finish : Chrome / Black

# TAZIO

Trimless  
Front Removable



Product Code	CRI	CCT	Dimension (in mm)			Lumen	Driver Opt	System Specs	
SL-DL-383-8w-R-W.WHT	80 / 90	3000K	Diameter	Height	Cutout	880 lm	36-42V@200mA	<b>Housing</b>	Aluminium
SL-DL-383-8w-R-N.WHT		4000K	77	75	φ 55	960 lm		<b>LED Make</b>	Cree / Bridgelux
SL-DL-383-8w-R-WHT		6500K				1000 lm		<b>Driver Brands</b>	Fulham / Philips / Osram
								<b>Dimming</b>	Triac / 0-10v / Dali
SL-DL-383-15w-R-W.WHT	80 / 90	3000K	Diameter	Height	Cutout	1650 lm	36-42V@350mA	<b>Housing</b>	Aluminium
SL-DL-383-15w-R-N.WHT		4000K	100	89	φ 75	1800 lm		<b>LED Make</b>	Cree / Bridgelux
SL-DL-383-15w-R-WHT		6500K				1875 lm		<b>Driver Brands</b>	Fulham / Philips / Osram
								<b>Dimming</b>	Triac / 0-10v / Dali
SL-DL-383-25w-R-W.WHT	80 / 90	3000K	Diameter	Height	Cutout	2750 lm	36-42V@700mA	<b>Housing</b>	Aluminium
SL-DL-383-25w-R-N.WHT		4000K	120	115	φ 95	3000 lm		<b>LED Make</b>	Cree / Bridgelux
SL-DL-383-25w-R-WHT		6500K				3125 lm		<b>Driver Brands</b>	Fulham / Osram
								<b>Dimming</b>	Triac / 0-10v / Dali

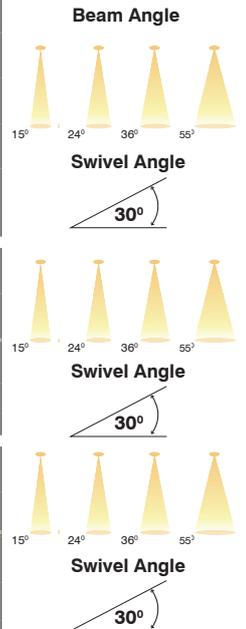

On request also available in CCT - 2700K / 3500K / 5000K , CRI - 95+  
Also Available in Dali DT8 / DT6 / Tuya Smart

# DOWN LIGHT

**NEW**






Available Body Finish : White / Black  
Available Reflector Finish : White / Black / Rose Gold

# ORIS




Product Code	CRI	CCT	Dimension (in mm)			Lumen	Driver Opt	System Specs	
SL-DL-382-9w-R-W.WHT	80 / 90	3000K	Diameter	Height	Cutout	990 lm	36-40V@200mA	<b>Housing</b>	Aluminium
SL-DL-382-9w-R-N.WHT		4000K	70	45	φ 60	1080 lm		<b>LED Make</b>	Cree / Bridgelux
SL-DL-382-9w-R-WHT		6500K				1125 lm		<b>Driver Brands</b>	Fulham / Philips / Osram
								<b>Dimming</b>	Triac / 0-10v / Dali
SL-DL-382-14w-R-W.WHT	80 / 90	3000K	Diameter	Height	Cutout	1540 lm	36-42V@300mA	<b>Housing</b>	Aluminium
SL-DL-382-14w-R-N.WHT		4000K	82	50	φ 75	1680 lm		<b>LED Make</b>	Cree / Bridgelux
SL-DL-382-14w-R-WHT		6500K				1750 lm		<b>Driver Brands</b>	Fulham / Philips / Osram
								<b>Dimming</b>	Triac / 0-10v / Dali
SL-DL-382-18w-R-W.WHT	80 / 90	3000K	Diameter	Height	Cutout	1980 lm	36-42V@400mA	<b>Housing</b>	Aluminium
SL-DL-382-18w-R-N.WHT		4000K	95	60	φ 85	2160 lm		<b>LED Make</b>	Cree / Bridgelux
SL-DL-382-18w-R-WHT		6500K				2250 lm		<b>Driver Brands</b>	Fulham / Osram
								<b>Dimming</b>	Triac / 0-10v / Dali

Beam Angle



On request also available in CCT - 2700K / 3500K / 5000K , CRI - 95+  
Also Available in Dali DT8 / DT6 / Tuya Smart


# DOWN LIGHT

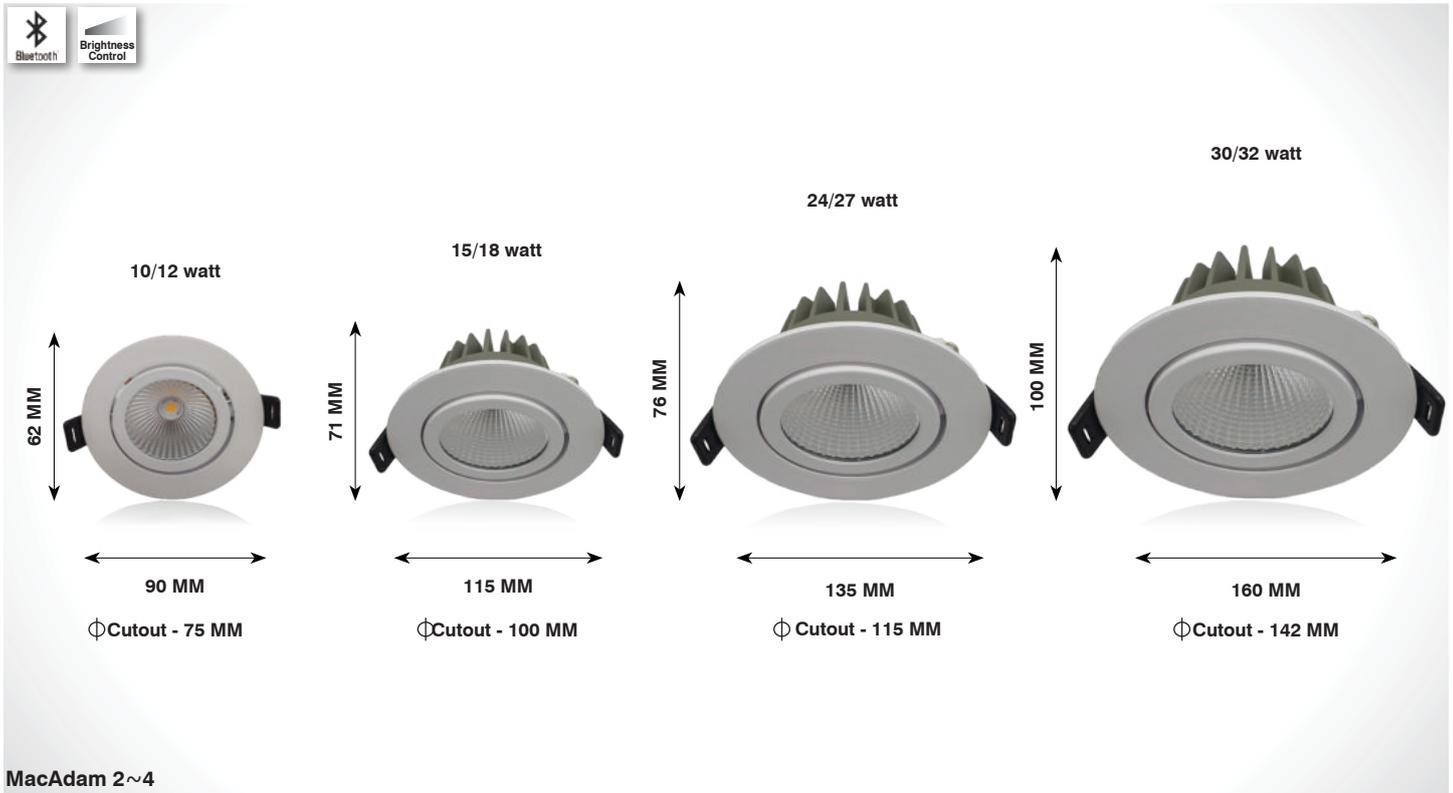

# GAZE




Product Code	CRI	CCT	Dimension (in mm)			Lumen	Driver Opt	System Specs	
			Diameter	Height	Cutout			Housing	LED Make
SL-DL-402-10/12w-R-W.WHT	80 / 90	3000K				1320 lm	36-42V@300mA	Aluminium	
SL-DL-402-10/12w-R-N.WHT		4000K	90	62	φ 75	1440 lm		Cree / Bridgelux	
SL-DL-402-10/12w-R-WHT		6500K				1500 lm		Fulham / Philips / Bag	
								Triac / 0-10v / Dali	
SL-DL-402-15/18w-R-W.WHT	80 / 90	3000K				1650 lm	36-42V@350mA	Aluminium	
SL-DL-402-15/18w-R-N.WHT		4000K	115	71	φ 100	1800 lm		Cree / Bridgelux	
SL-DL-402-15/18w-R-WHT		6500K				1875 lm		Fulham / Osram	
								Triac / 0-10v / Dali	
SL-DL-402-24/27w-R-W.WHT	80 / 90	3000K				2750 lm	36-42V@700 mA	Aluminium	
SL-DL-402-24/27w-R-N.WHT		4000K	135	76	φ 115	3000 lm		Cree / Bridgelux	
SL-DL-402-24/27w-R-WHT		6500K				3125 lm		Fulham / Osram	
								Triac / 0-10v / Dali	
SL-DL-402-30/32w-R-W.WHT	80 / 90	3000K				3300 lm	36-42V@850 mA	Aluminium	
SL-DL-402-30/32w-R-N.WHT		4000K	160	100	φ 142	3600 lm		Cree / Bridgelux	
SL-DL-402-30/32w-R-WHT		6500K				3750 lm		Fulham / Osram	
								Triac / 0-10v / Dali	

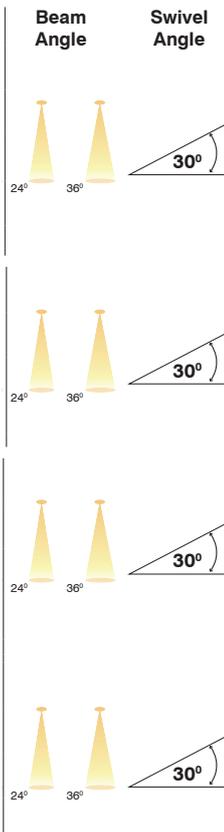

On request also available in CCT - 2700K / 3500K / 5000K , CRI - 95+  
Also Available in Dali DT8 / DT6 / Tuya Smart

## DOWN LIGHT SERIES

**NEW**

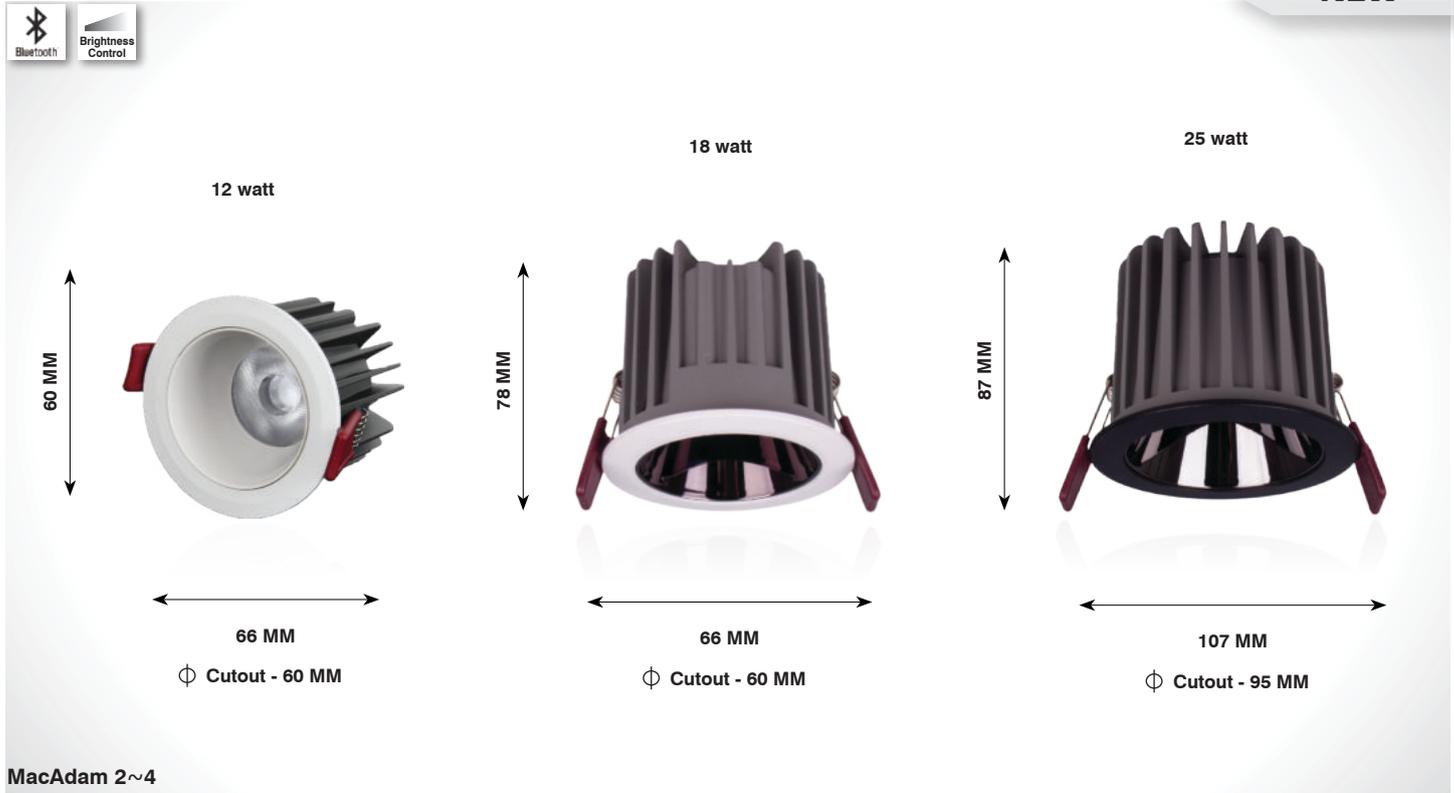

MacAdam 2~4




Available Reflector Finish : White / Titanium Black

## HAZEL



Product Code	CRI	CCT	Dimension (in mm)			Lumen	Driver Opt	System Specs	
			Diameter	Height	Cutout			Housing	Aluminium
SL-DL-403-12w-R-W.WHT	80 / 90	3000K	66	60	φ 60	1320 lm	36-42V@300mA	<b>LED Make</b>	Cree / Bridgelux
SL-DL-403-12w-R-N.WHT		4000K				1440 lm		<b>Driver Brands</b>	Osram / Philips / Bag
SL-DL-403-12w-R-WHT		6500K				1500 lm		<b>Dimming</b>	Triac / 0-10v / Dali
SL-DL-403-18w-R-W.WHT	80 / 90	3000K	66	78	φ 60	1980 lm	36-42V@400mA	<b>Housing</b>	Aluminium
SL-DL-403-18w-R-N.WHT		4000K				2160 lm		<b>LED Make</b>	Cree / Bridgelux
SL-DL-403-18w-R-WHT		6500K				2250 lm		<b>Driver Brands</b>	Osram / Fulham
								<b>Dimming</b>	Triac / 0-10v / Dali
SL-DL-403-25w-R-W.WHT	80 / 90	3000K	107	87	φ 95	2750 lm	36-42V@700mA	<b>Housing</b>	Aluminium
SL-DL-403-25w-R-N.WHT		4000K				3000 lm		<b>LED Make</b>	Cree / Bridgelux
SL-DL-403-25w-R-WHT		6500K				3125 lm		<b>Driver Brands</b>	Osram / Fulham
								<b>Dimming</b>	Triac / 0-10v / Dali

Beam Angle



On request also available in CCT - 2700K / 3500K / 5000K , CRI - 95+  
Also Available in Dali DT8 / DT6 / Tuya Smart



RETROFIT LAMP SERIES

## RETROFIT LAMP




Available Reflector Finish : Chrome / Rose Gold / White / Black

## FELIX

### Imported Module



Product Code	CRI	CCT	Dimension (in mm)			Lumen	Driver Opt	System Specs	
SL-DL-262-6w-R-W.WHT	80 / 90	3000K	Diameter	Height	Cutout	660 lm	36-42V@150mA	<b>Housing</b>	Aluminium
SL-DL-262-6w-R-N.WHT		4000K	85	90	φ75	720 lm		<b>LED Make</b>	Cree / Bridgelux
SL-DL-262-6w-R-WHT		6500K				750 lm		<b>Driver Brands</b>	Philips / Bag
								<b>Dimming</b>	Triac / 0-10v / Dali
SL-DL-262-10w-R-W.WHT	80 / 90	3000K	Diameter	Height	Cutout	1100 lm	36-42V@250mA	<b>Housing</b>	Aluminium
SL-DL-262-10w-R-N.WHT		4000K	85	110	φ75	1200 lm		<b>LED Make</b>	Cree / Bridgelux
SL-DL-262-10w-R-WHT		6500K				1250 lm		<b>Driver Brands</b>	Fulham / Philips / Bag
								<b>Dimming</b>	Triac / 0-10v / Dali
SL-DL-262-15w-R-W.WHT	80 / 90	3000K	Diameter	Height	Cutout	1650 lm	36-42V@350mA	<b>Housing</b>	Aluminium
SL-DL-262-15w-R-N.WHT		4000K	85	115	φ75	1800 lm		<b>LED Make</b>	Cree / Bridgelux
SL-DL-262-15w-R-WHT		6500K				1875 lm		<b>Driver Brands</b>	Fulham / Philips / Bag
								<b>Dimming</b>	Triac / 0-10v / Dali

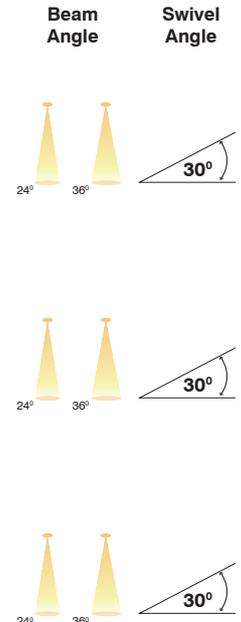


On request also available in CCT - 2700K / 3500K / 5000K , CRI - 95+  
Also Available in Dali DT8 / DT6 / Tuya Smart

### Application



## RETROFIT LAMP

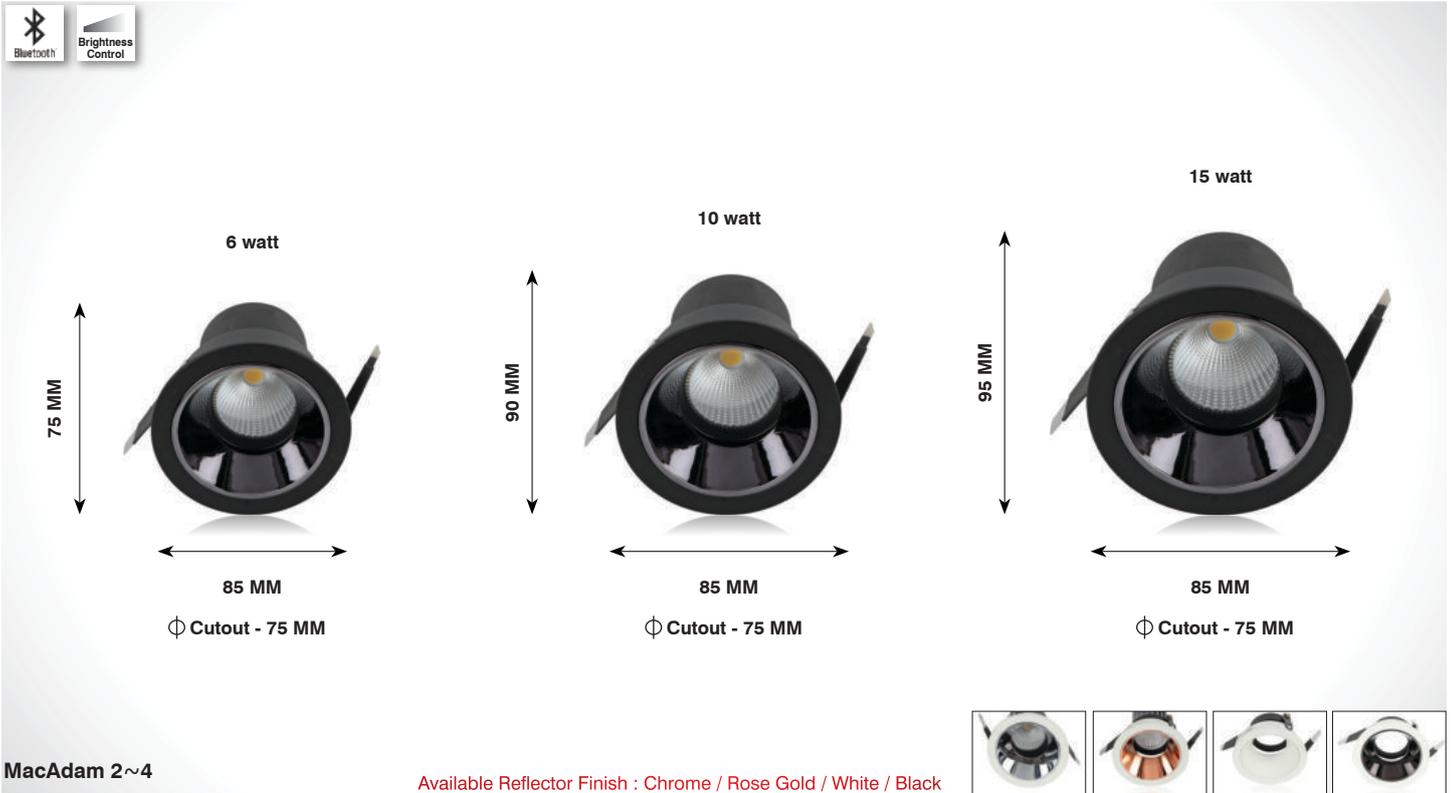


## BONITO

### Imported Module




Product Code	CRI	CCT	Dimension (in mm)			Lumen	Driver Opt	System Specs	
			Diameter	Height	Cutout			<b>Housing</b>	Aluminium
SL-DL-263-6w-R-W.WHT	80 / 90	3000K	85	75	φ75	660 lm	36-42V@150mA	<b>LED Make</b>	Cree / Bridgelux
SL-DL-263-6w-R-N.WHT		4000K				720 lm		<b>Driver Brands</b>	Philips / Bag
SL-DL-263-6w-R-WHT		6500K				750 lm		<b>Dimming</b>	Triac / 0-10v / Dali
SL-DL-263-10w-R-W.WHT	80 / 90	3000K	85	90	φ75	1100 lm	36-42V@250mA	<b>Housing</b>	Aluminium
SL-DL-263-10w-R-N.WHT		4000K				1200 lm		<b>LED Make</b>	Cree / Bridgelux
SL-DL-263-10w-R-WHT		6500K				1250 lm		<b>Driver Brands</b>	Fulham / Philips / Bag
								<b>Dimming</b>	Triac / 0-10v / Dali
SL-DL-263-15w-R-W.WHT	80 / 90	3000K	85	95	φ75	1650 lm	36-42V@350mA	<b>Housing</b>	Aluminium
SL-DL-263-15w-R-N.WHT		4000K				1800 lm		<b>LED Make</b>	Cree / Bridgelux
SL-DL-263-15w-R-WHT		6500K				1875 lm		<b>Driver Brands</b>	Fulham / Philips / Bag
								<b>Dimming</b>	Triac / 0-10v / Dali

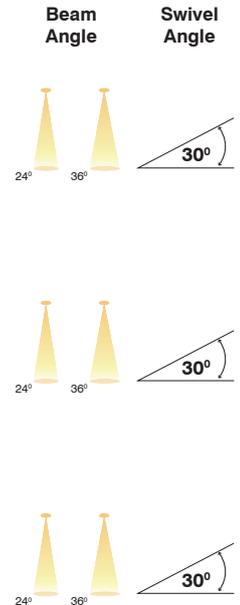

On request also available in CCT - 2700K / 3500K / 5000K , CRI - 95+  
Also Available in Dali DT8 / DT6 / Tuya Smart

## RETROFIT LAMP

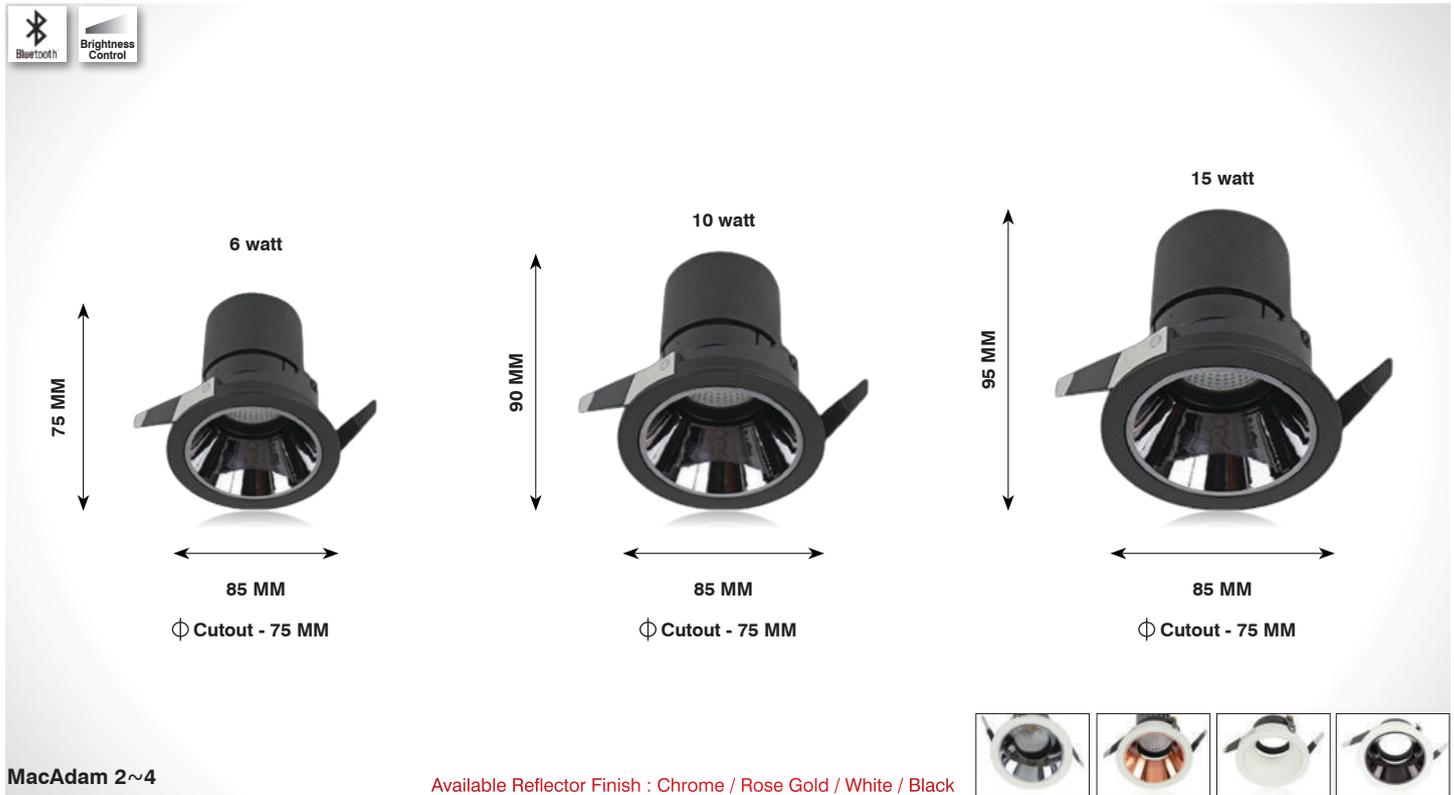


## VELENO

Imported Module  
(Front Removable)




Product Code	CRI	CCT	Dimension (in mm)			Lumen	Driver Opt	System Specs	
			Diameter	Height	Cutout			Housing	Aluminium
SL-DL-284-6w-R-W.WHT	80 / 90	3000K	85	75	φ75	660 lm	36-42V@150mA	<b>LED Make</b>	Cree / Bridgelux
SL-DL-284-6w-R-N.WHT		4000K				720 lm		<b>Driver Brands</b>	Philips / Bag
SL-DL-284-6w-R-WHT		6500K				750 lm		<b>Dimming</b>	Triac / 0-10v / Dali
SL-DL-284-10w-R-W.WHT	80 / 90	3000K	85	90	φ75	1100 lm	36-42V@250mA	<b>Housing</b>	Aluminium
SL-DL-284-10w-R-N.WHT		4000K				1200 lm		<b>LED Make</b>	Cree / Bridgelux
SL-DL-284-10w-R-WHT		6500K				1250 lm		<b>Driver Brands</b>	Fulham / Philips / Bag
SL-DL-284-10w-R-WHT								<b>Dimming</b>	Triac / 0-10v / Dali
SL-DL-284-15w-R-W.WHT	80 / 90	3000K	85	95	φ75	1650 lm	36-42V@350mA	<b>Housing</b>	Aluminium
SL-DL-284-15w-R-N.WHT		4000K				1800 lm		<b>LED Make</b>	Cree / Bridgelux
SL-DL-284-15w-R-WHT		6500K				1875 lm		<b>Driver Brands</b>	Fulham / Philips / Bag
SL-DL-284-15w-R-WHT								<b>Dimming</b>	Triac / 0-10v / Dali

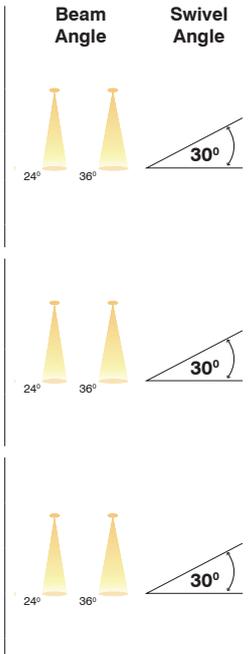

On request also available in CCT - 2700K / 3500K / 5000K , CRI - 95+  
Also Available in Dali DT8 / DT6 / Tuya Smart

## RETROFIT LAMP

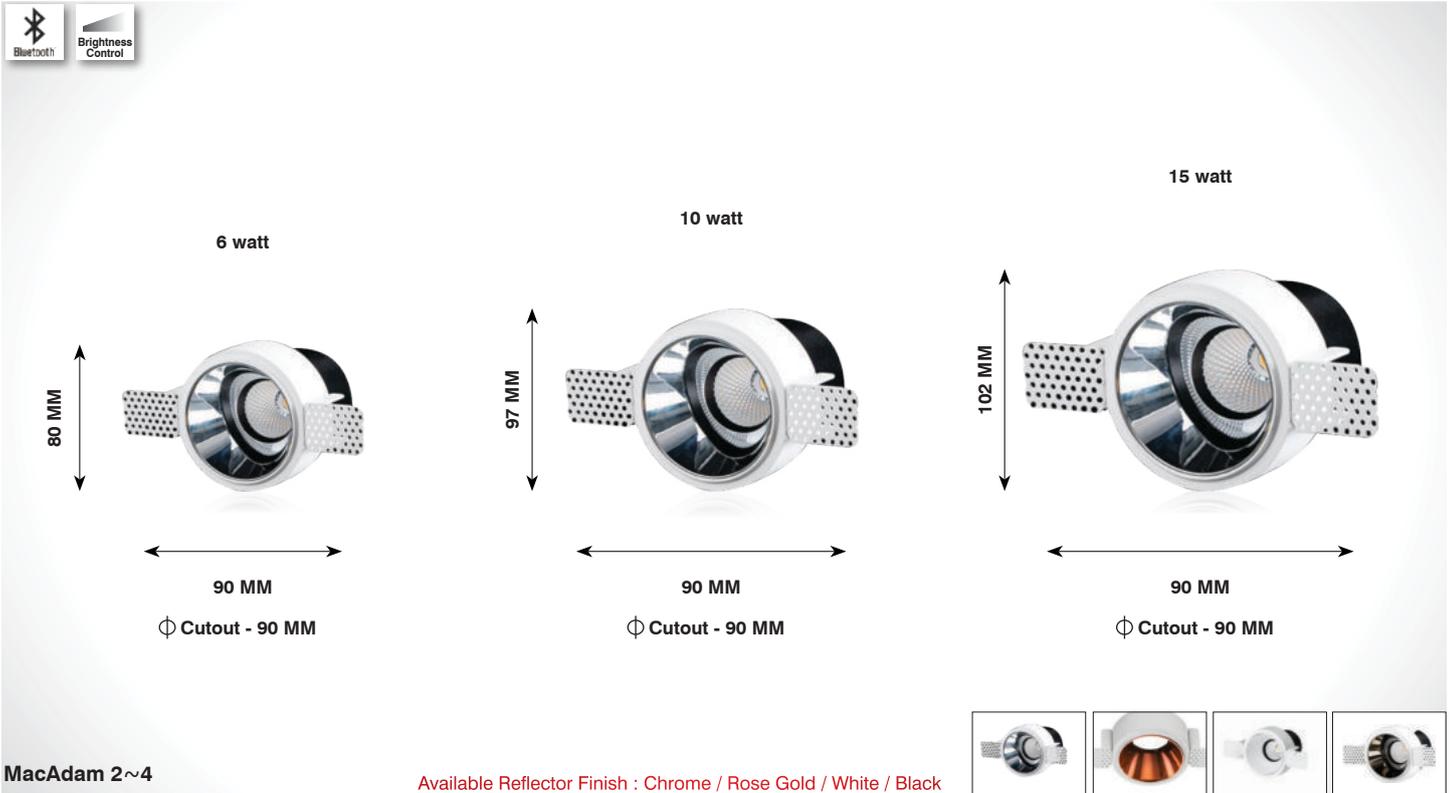




## SNIPER

Imported Module  
(Front Removable)



Product Code	CRI	CCT	Dimension (in mm)			Lumen	Driver Opt	System Specs	
			Diameter	Height	Cutout			Housing	
SL-DL-275-6w-R-W.WHT	80 / 90	3000K				660 lm	36-42V@150mA	Aluminium	
SL-DL-275-6w-R-N.WHT		4000K	90	80	$\phi$ 90	720 lm		Cree / Bridgelux	
SL-DL-275-6w-R-WHT		6500K				750 lm		Philips / Bag	
								Triac / 0-10v / Dali	
SL-DL-275-10w-R-W.WHT	80 / 90	3000K				1100 lm	36-42V@250mA	Aluminium	
SL-DL-275-10w-R-N.WHT		4000K	90	97	$\phi$ 90	1200 lm		Cree / Bridgelux	
SL-DL-275-10w-R-WHT		6500K				1250 lm		Fulham / Philips / Bag	
								Triac / 0-10v / Dali	
SL-DL-275-15w-R-W.WHT	80 / 90	3000K				1650 lm	36-42V@350mA	Aluminium	
SL-DL-275-15w-R-N.WHT		4000K	90	102	$\phi$ 90	1800 lm		Cree / Bridgelux	
SL-DL-275-15w-R-WHT		6500K				1875 lm		Fulham / Philips / Bag	
								Triac / 0-10v / Dali	

Beam Angle



## RETROFIT LAMP




## IVAN


### Indian Module



Product Code	CRI	CCT	Dimension (in mm)			Lumen	Driver Opt	System Specs	
			Diameter	Height	Cutout			Housing	Aluminium
SL-DL-276-10w-R-W.WHT	80 / 90	3000K	85	110	∅75	1100 lm	36-42V@250mA	<b>LED Make</b>	Cree / Bridgelux
SL-DL-276-10w-R-N.WHT		4000K				1200 lm		<b>Driver Brands</b>	Fulham / Philips / Bag
SL-DL-276-10w-R-WHT		6500K				1250 lm		<b>Dimming</b>	Triac / 0-10v / Dali
SL-DL-276-14w-R-W.WHT	80 / 90	3000K	85	130	∅75	1540 lm	36-42V@300mA	<b>Housing</b>	Aluminium
SL-DL-276-14w-R-N.WHT		4000K				1680 lm		<b>LED Make</b>	Cree / Bridgelux
SL-DL-276-14w-R-WHT		6500K				1750 lm		<b>Driver Brands</b>	Fulham / Philips / Bag
								<b>Dimming</b>	Triac / 0-10v / Dali

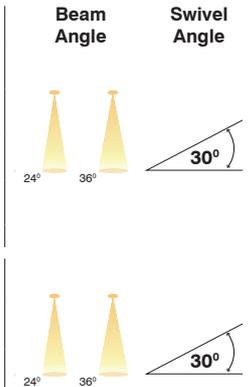

## RETROFIT LAMP

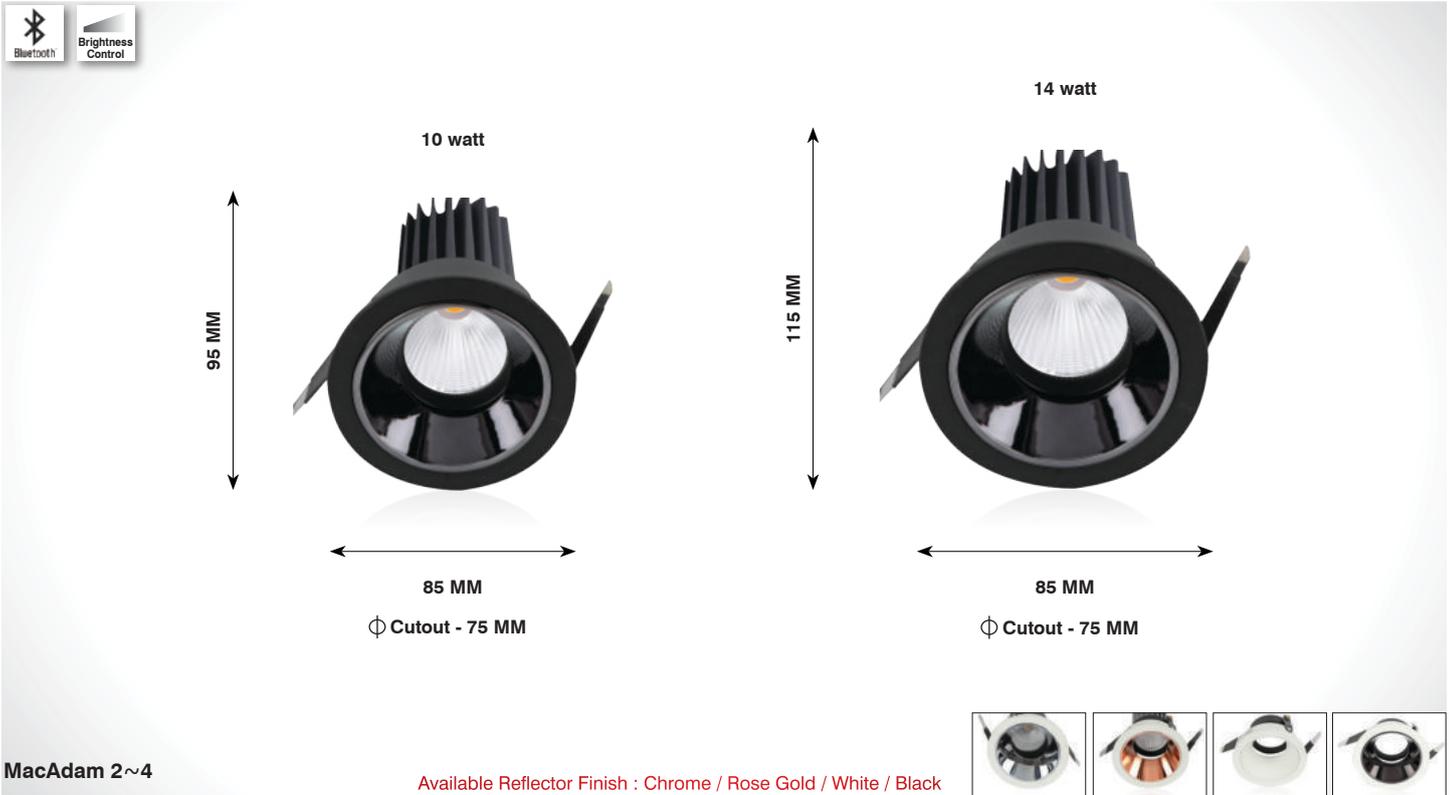


## HECTOR


Indian Module



Product Code	CRI	CCT	Dimension (in mm)			Lumen	Driver Opt	System Specs	
			Diameter	Height	Cutout			Housing	LED Make
SL-DL-277-10w-R-W.WHT	80 / 90	3000K	85	95	φ75	1100 lm	36-42V@250mA	Aluminium	Cree / Bridgelux
SL-DL-277-10w-R-N.WHT		4000K	85	95	φ75	1200 lm			Fulham / Philips / Bag
SL-DL-277-10w-R-WHT		6500K				1250 lm			Triac / 0-10v / Dali
SL-DL-277-14w-R-W.WHT	80 / 90	3000K	85	115	φ75	1540 lm	36-42V@300mA	Aluminium	Cree / Bridgelux
SL-DL-277-14w-R-N.WHT		4000K	85	115	φ75	1680 lm			Fulham / Philips / Bag
SL-DL-277-14w-R-WHT		6500K				1750 lm			Triac / 0-10v / Dali

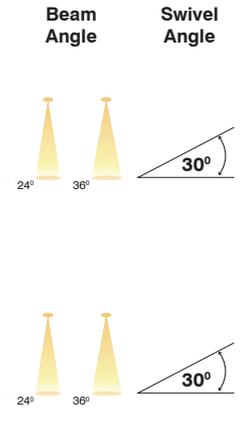

## RETROFIT LAMP

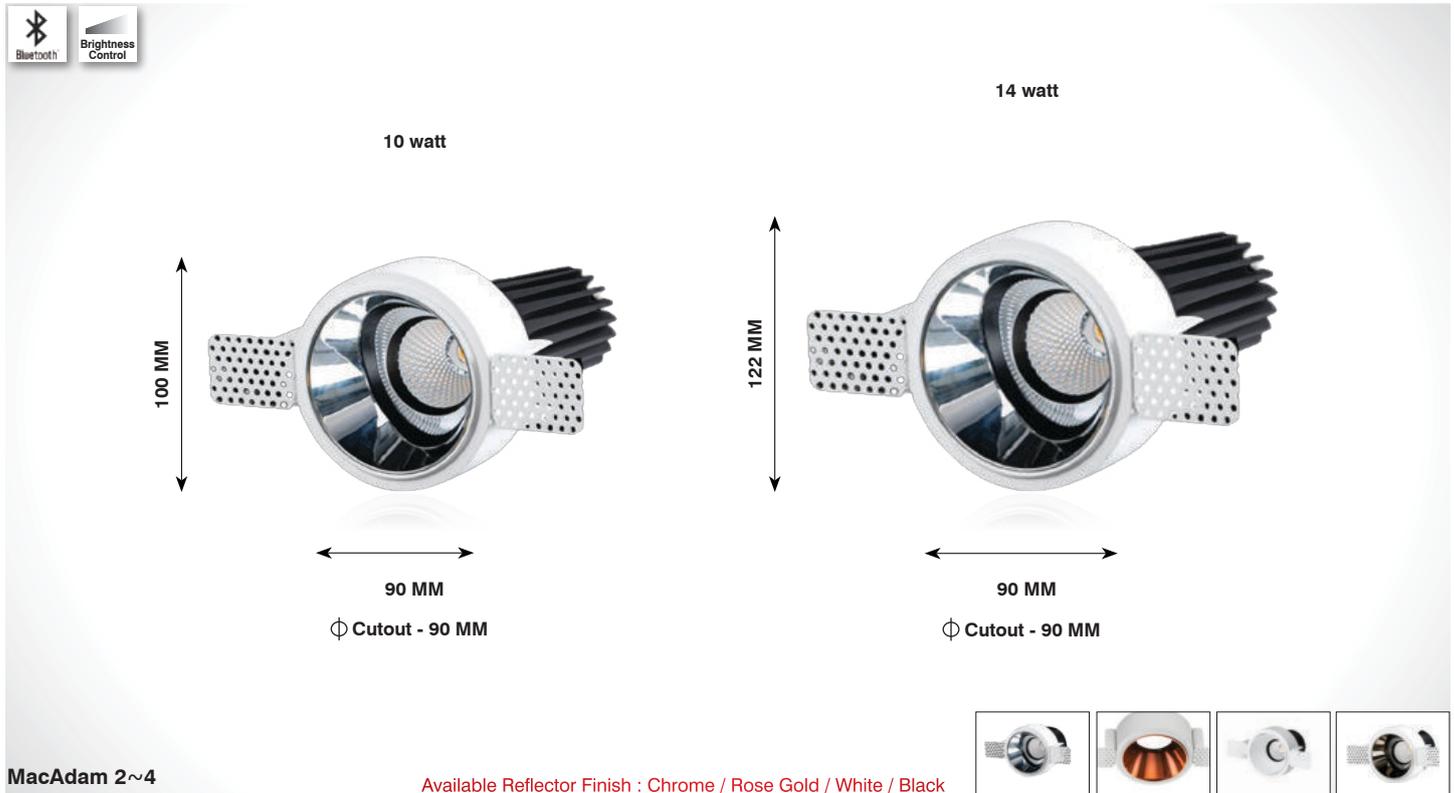



## BORIS

Indian Module  
(Front Removable)



Product Code	CRI	CCT	Dimension (in mm)			Lumen	Driver Opt	System Specs	
			Diameter	Height	Cutout			Housing	Aluminium
SL-DL-278-10w-R-W.WHT	80 / 90	3000K	90	100	φ90	1100 lm	36-42V@250mA	<b>LED Make</b>	Cree / Bridgelux
SL-DL-278-10w-R-N.WHT		4000K				1200 lm		<b>Driver Brands</b>	Fulham / Philips / Bag
SL-DL-278-10w-R-WHT		6500K				1250 lm		<b>Dimming</b>	Triac / 0-10v / Dali
SL-DL-278-14w-R-W.WHT	80 / 90	3000K	90	122	φ90	1540 lm	36-42V@300mA	<b>Housing</b>	Aluminium
SL-DL-278-14w-R-N.WHT		4000K				1680 lm		<b>LED Make</b>	Cree / Bridgelux
SL-DL-278-14w-R-WHT		6500K				1750 lm		<b>Driver Brands</b>	Fulham / Philips / Bag
								<b>Dimming</b>	Triac / 0-10v / Dali

Beam Angle



## RETROFIT LAMP




## CANISA

Indian Module  
(Front Removable)



Product Code	CRI	CCT	Dimension (in mm)			Lumen	Driver Opt	System Specs	
			Diameter	Height	Cutout			Housing	Aluminium
SL-DL-285-10w-R-W.WHT	80 / 90	3000K	85	95	φ75	1100 lm	36-42V@250mA	<b>LED Make</b>	Cree / Bridgelux
SL-DL-285-10w-R-N.WHT		4000K				1200 lm		<b>Driver Brands</b>	Fulham / Philips / Bag
SL-DL-285-10w-R-WHT		6500K				1250 lm		<b>Dimming</b>	Triac / 0-10v / Dali
SL-DL-285-14w-R-W.WHT	80 / 90	3000K	85	115	φ75	1540 lm	36-42V@300mA	<b>Housing</b>	Aluminium
SL-DL-285-14w-R-N.WHT		4000K				1680 lm		<b>LED Make</b>	Cree / Bridgelux
SL-DL-285-14w-R-WHT		6500K				1750 lm		<b>Driver Brands</b>	Fulham / Philips / Bag
								<b>Dimming</b>	Triac / 0-10v / Dali

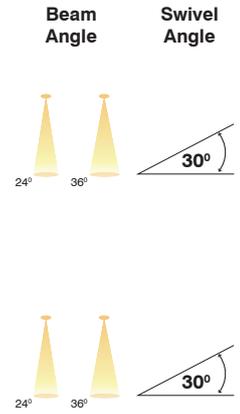


## RETROFIT LAMP



## RIO




Product Code	CRI	CCT	Dimension (in mm)			Lumen	Driver Opt	System Specs	
SL-LP-215-6w-R-W.WHT	80 / 90	3000K	Diameter	Height	Cutout	660 lm	36-42V@150mA	<b>Housing</b>	Aluminium
SL-LP-215-6w-R-N.WHT		4000K	80	65	φ70	720 lm		<b>LED Make</b>	Cree
SL-LP-215-6w-R-WHT		6500K				750 lm		<b>Driver Brands</b>	Philips / Bag
								<b>Dimming</b>	Triac / 0-10v / Dali




## ROSA

Product Code	CRI	CCT	Dimension (in mm)			Lumen	Driver Opt	System Specs	
SL-LP-216-10w-R-W.WHT	80 / 90	3000K	Diameter	Height	Cutout	1100 lm	36-42V@250mA	<b>Housing</b>	Aluminium
SL-LP-216-10w-R-N.WHT		4000K	80	85	φ70	1200 lm		<b>LED Make</b>	Cree / Bridgelux
SL-LP-216-10w-R-WHT		6500K				1250 lm		<b>Driver Brands</b>	Fulham / Philips / Bag
								<b>Dimming</b>	Triac / 0-10v / Dali



## RUFI

Product Code	CRI	CCT	Dimension (in mm)			Lumen	Driver Opt	System Specs	
SL-LP-217-15w-R-W.WHT	80 / 90	3000K	Diameter	Height	Cutout	1650 lm	36-42V@350mA	<b>Housing</b>	Aluminium
SL-LP-217-15w-R-N.WHT		4000K	80	95	φ70	1800 lm		<b>LED Make</b>	Cree / Bridgelux
SL-LP-217-15w-R-WHT		6500K				1875 lm		<b>Driver Brands</b>	Fulham / Philips / Bag
								<b>Dimming</b>	Triac / 0-10v / Dali



On request also available in CCT - 2700K / 3500K / 5000K , CRI - 95+  
Also Available in Dali DT8 / DT6 / Tuya Smart

## RETROFIT LAMP






## SANTOS

### Indian Module



Product Code	CRI	CCT	Dimension (in mm)		Lumen	Driver Opt	System Specs	
SL-LP-157-9w-R-W.WHT	80 / 90	3000K	Diameter	Height	990 lm	36-42V@200mA	<b>Housing</b>	Aluminium
SL-LP-157-9w-R-N.WHT		4000K	50	60	1080 lm		<b>LED Make</b>	Cree / Bridgelux
SL-LP-157-9w-R-WHT		6500K			1125 lm		<b>Driver Brands</b>	Philips / Bag
							<b>Dimming</b>	Triac / 0-10v / Dali
SL-LP-120-10w-R-W.WHT	80 / 90	3000K	Diameter	Height	1100 lm	36-42V@250mA	<b>Housing</b>	Aluminium
SL-LP-120-10w-R-N.WHT		4000K	50	60	1200 lm		<b>LED Make</b>	Cree / Bridgelux
SL-LP-120-10w-R-WHT		6500K			1250 lm		<b>Driver Brands</b>	Fulham / Philips / Bag
							<b>Dimming</b>	Triac / 0-10v / Dali
SL-LP-125-14w-R-W.WHT	80 / 90	3000K	Diameter	Height	1540 lm	36-42V@300mA	<b>Housing</b>	Aluminium
SL-LP-125-14w-R-N.WHT		4000K	50	85	1680 lm		<b>LED Make</b>	Cree / Bridgelux
SL-LP-125-14w-R-WHT		6500K			1750 lm		<b>Driver Brands</b>	Fulham / Philips / Bag
							<b>Dimming</b>	Triac / 0-10v / Dali

### Beam Angle



## RETROFIT LAMP



MacAdam 2~4


Available Reflector Finish : Chrome / Rose Gold / White / Black

## MARINA


### Indian Module



Product Code	CRI	CCT	Dimension (in mm)			Lumen	Driver Opt	System Specs	
			Diameter	Height	Cutout			Housing	LED Make
SL-LP-205-10w-R-W.WHT	80 / 90	3000K	80	95	φ70	1100 lm	36-42V@250mA	Aluminium	Cree / Bridgelux
SL-LP-205-10w-R-N.WHT		4000K				1200 lm			Fulham / Philips / Bag
SL-LP-205-10w-R-WHT		6500K				1250 lm			Triac / 0-10v / Dali
SL-LP-205-14w-R-W.WHT	80 / 90	3000K	80	120	φ70	1540 lm	36-42V@300mA	Aluminium	Cree / Bridgelux
SL-LP-205-14w-R-N.WHT		4000K				1680 lm			Fulham / Philips / Bag
SL-LP-205-14w-R-WHT		6500K				1750 lm			Triac / 0-10v / Dali

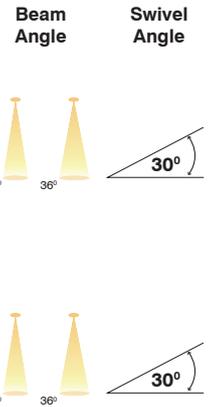


On request also available in CCT - 2700K / 3500K / 5000K , CRI - 95+  
Also Available in Dali DT8 / DT6 / Tuya Smart

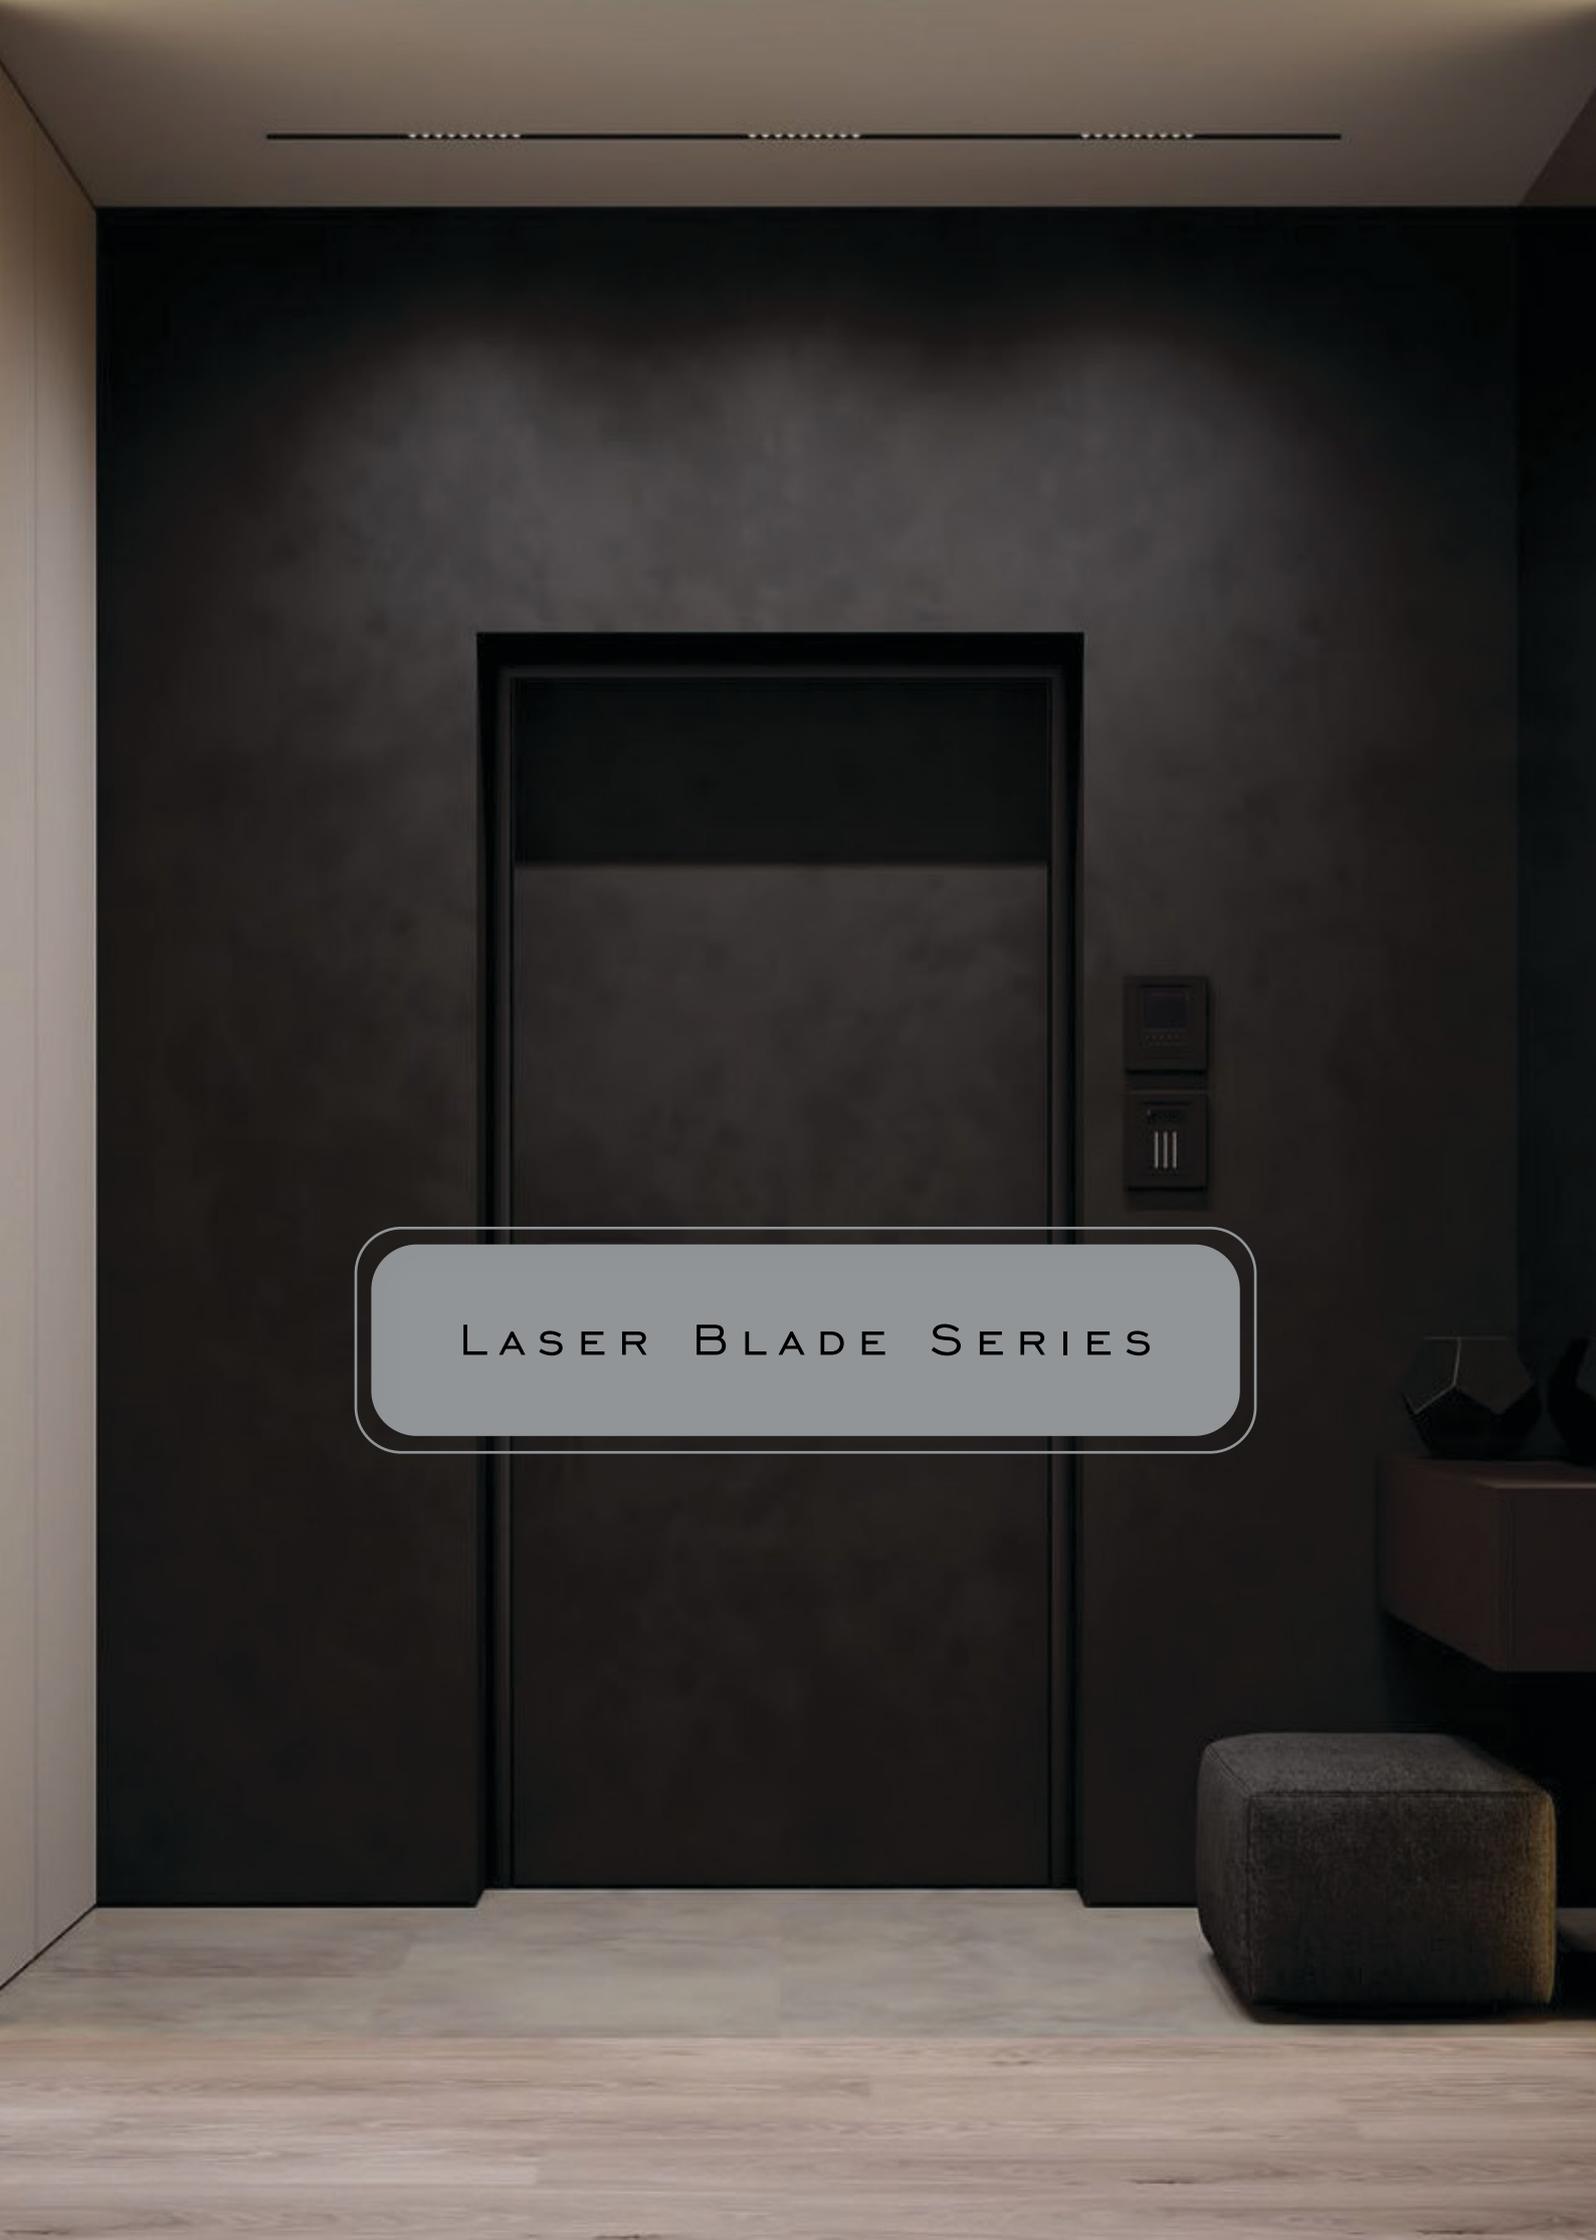

L A S E R   B L A D E   S E R I E S

# TRIMLESS LASER BLADE

**NEW**

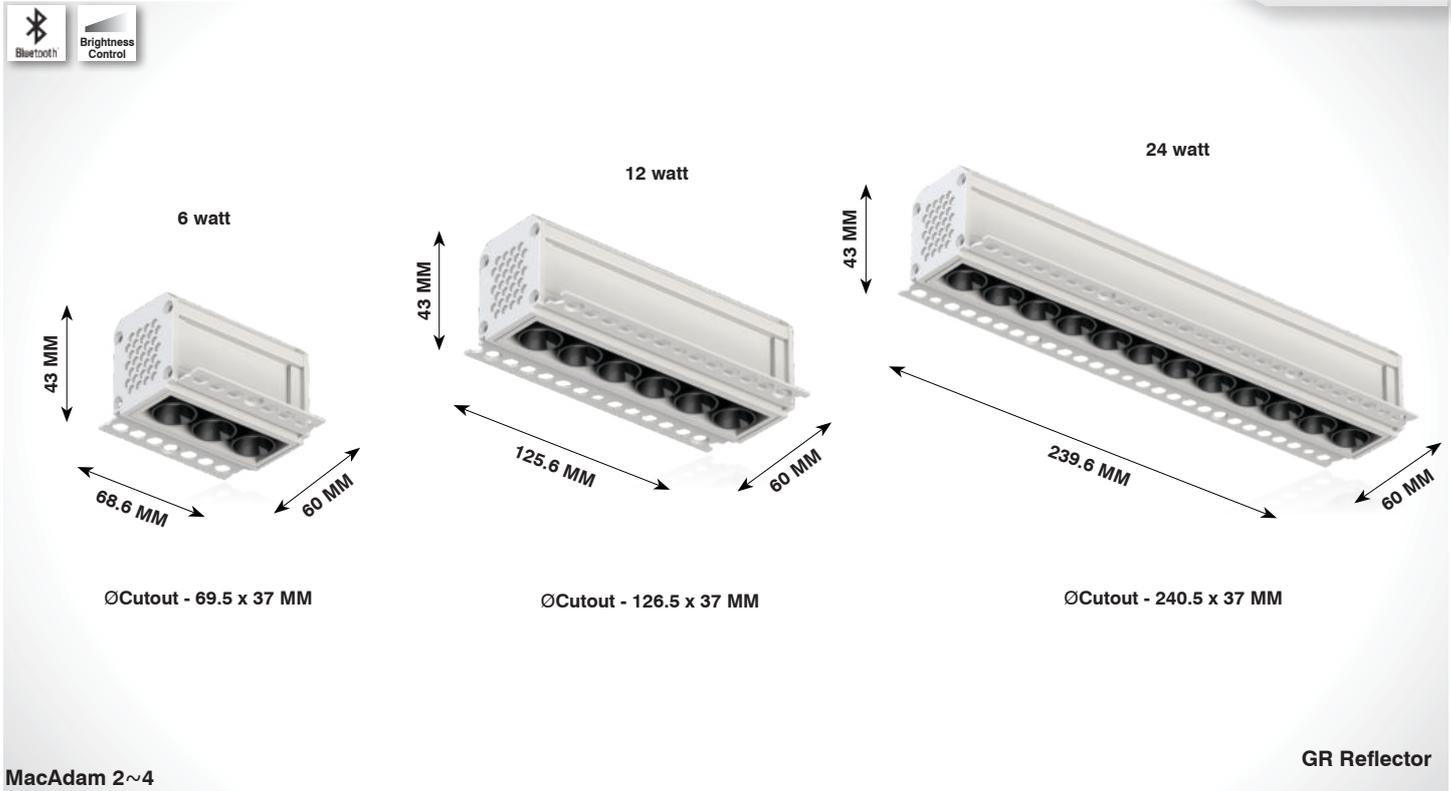

Available Body Colour : White Body & Inside Titanium Black




# TRON

Trimless  
Front Removable


**DIMMABLE**

Product Code	CRI	CCT	Dimension (in mm)		Lumen	Driver Opt	System Specs	
SL-LB-385-6w-R-W.WHT	80 / 90	3000K	Diameter	Height	660 lm	7-12V@700mA	<b>Housing</b>	Aluminium
SL-LB-385-6w-R-N.WHT		4000K	68.6x60	43	720 lm		<b>LED Make</b>	Cree / Osram
SL-LB-385-6w-R-WHT		6500K			750 lm		<b>Driver Brands</b>	Fulham / Osram
							<b>Dimming</b>	Triac / 0-10v / Dali DT6
SL-LB-385-12w-R-W.WHT	80 / 90	3000K	Diameter	Height	1320 lm	11-22V@700mA	<b>Housing</b>	Aluminium
SL-LB-385-12w-R-N.WHT		4000K	125.6x60	43	1440 lm		<b>LED Make</b>	Cree / Osram
SL-LB-385-12w-R-WHT		6500K			1500 lm		<b>Driver Brands</b>	Osram / Fulham
							<b>Dimming</b>	Triac / 0-10v / Dali DT6
SL-LB-385-24w-R-W.WHT	80 / 90	3000K	Diameter	Height	2640 lm	27-32V@700mA	<b>Housing</b>	Aluminium
SL-LB-385-24w-R-N.WHT		4000K	239.6x60	43	2880 lm		<b>LED Make</b>	Cree / Osram
SL-LB-385-24w-R-WHT		6500K			3000 lm		<b>Driver Brands</b>	Osram / Fulham
							<b>Dimming</b>	Triac / 0-10v / Dali DT6

**Beam Angle**



# POP OUT LASER BLADE

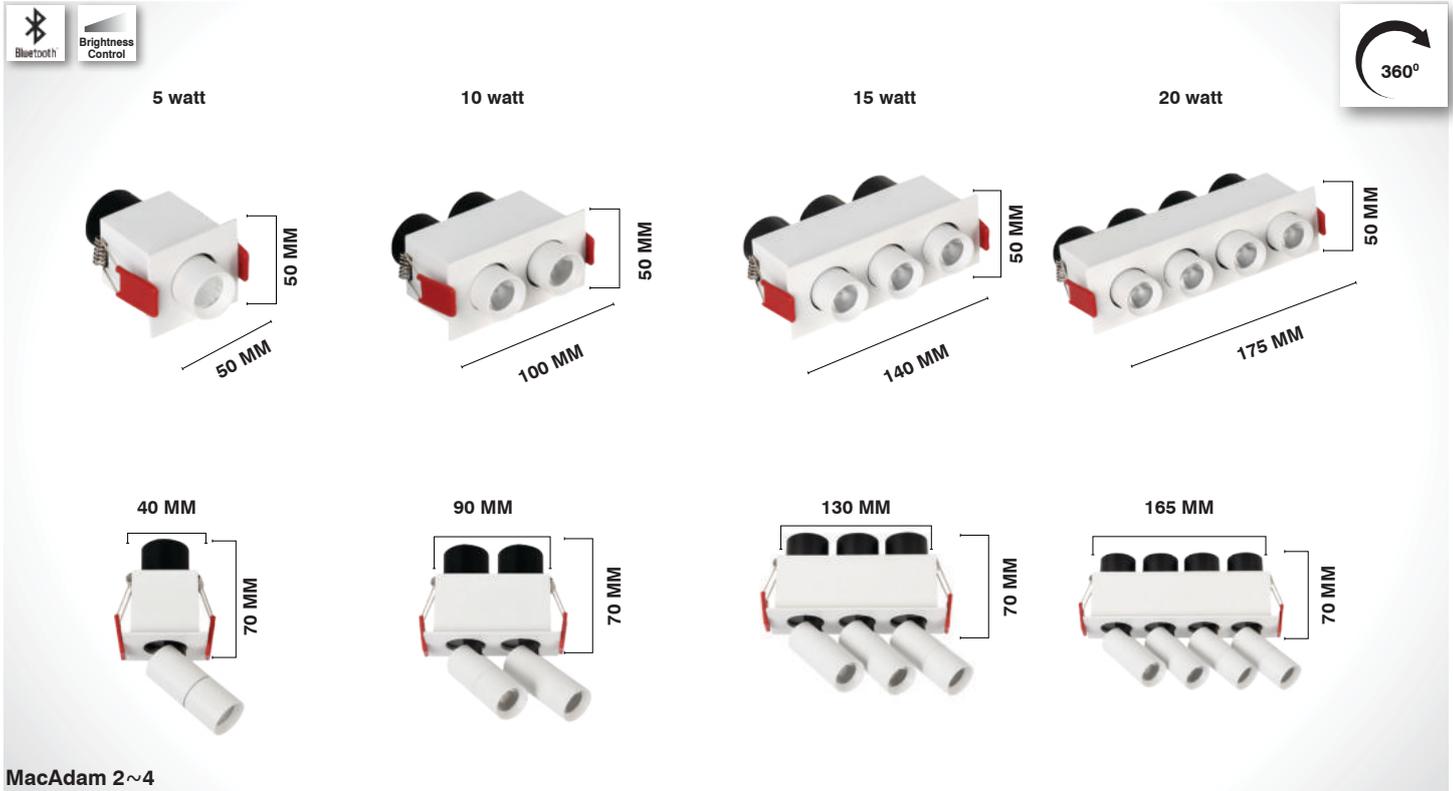


Available Body Colour : Black / White

## LEXA




Product Code	CRI	CCT	Dimension (in mm)			Lumen	Driver Opt	System Specs	
SL-LB-332-5w-R-W.WHT	80 / 90	3000K	Diameter	Height	Cutout	550 lm	Srishti Driver	<b>Housing</b>	Aluminium
SL-LB-332-5w-R-N.WHT		4000K	50X50	70	Ø40	600 lm		<b>LED Make</b>	Osram
SL-LB-332-5w-R-WHT		6500K				625 lm		<b>Driver Brands</b>	Srishti
								<b>Dimming</b>	Traic /0-10 V & Dali DT6
Product Code	CRI	CCT	Dimension (in mm)			Lumen	Driver Opt	System Specs	
SL-LB-332-10w-R-W.WHT	80 / 90	3000K	Diameter	Height	Cutout	1100 lm	Srishti Driver	<b>Housing</b>	Aluminium
SL-LB-332-10w-R-N.WHT		4000K	100X50	70	Ø90	1200 lm		<b>LED Make</b>	Osram
SL-LB-332-10w-R-WHT		6500K				1250 lm		<b>Driver Brands</b>	Srishti
								<b>Dimming</b>	Traic /0-10 V & Dali DT6
Product Code	CRI	CCT	Dimension (in mm)			Lumen	Driver Opt	System Specs	
SL-LB-332-15w-R-W.WHT	80 / 90	3000K	Diameter	Height	Cutout	1650 lm	Srishti Driver	<b>Housing</b>	Aluminium
SL-LB-332-15w-R-N.WHT		4000K	140X50	70	Ø130	1800 lm		<b>LED Make</b>	Osram
SL-LB-332-15w-R-WHT		6500K				1875 lm		<b>Driver Brands</b>	Srishti
								<b>Dimming</b>	Traic /0-10 V & Dali DT6
Product Code	CRI	CCT	Dimension (in mm)			Lumen	Driver Opt	System Specs	
SL-LB-332-20w-R-W.WHT	80 / 90	3000K	Diameter	Height	Cutout	2200 lm	Srishti Driver	<b>Housing</b>	Aluminium
SL-LB-332-20w-R-N.WHT		4000K	175X50	70	Ø165	2400 lm		<b>LED Make</b>	Osram
SL-LB-332-20w-R-WHT		6500K				2500 lm		<b>Driver Brands</b>	Srishti
								<b>Dimming</b>	Traic /0-10 V & Dali DT6

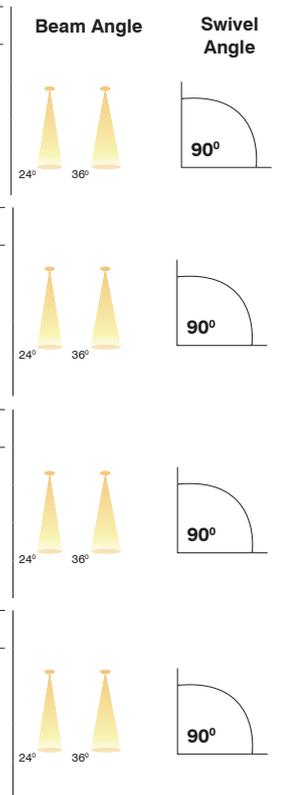

On request also available in CCT - 2700K / 3500K / 5000K

## ADJUSTABLE LASER BLADE

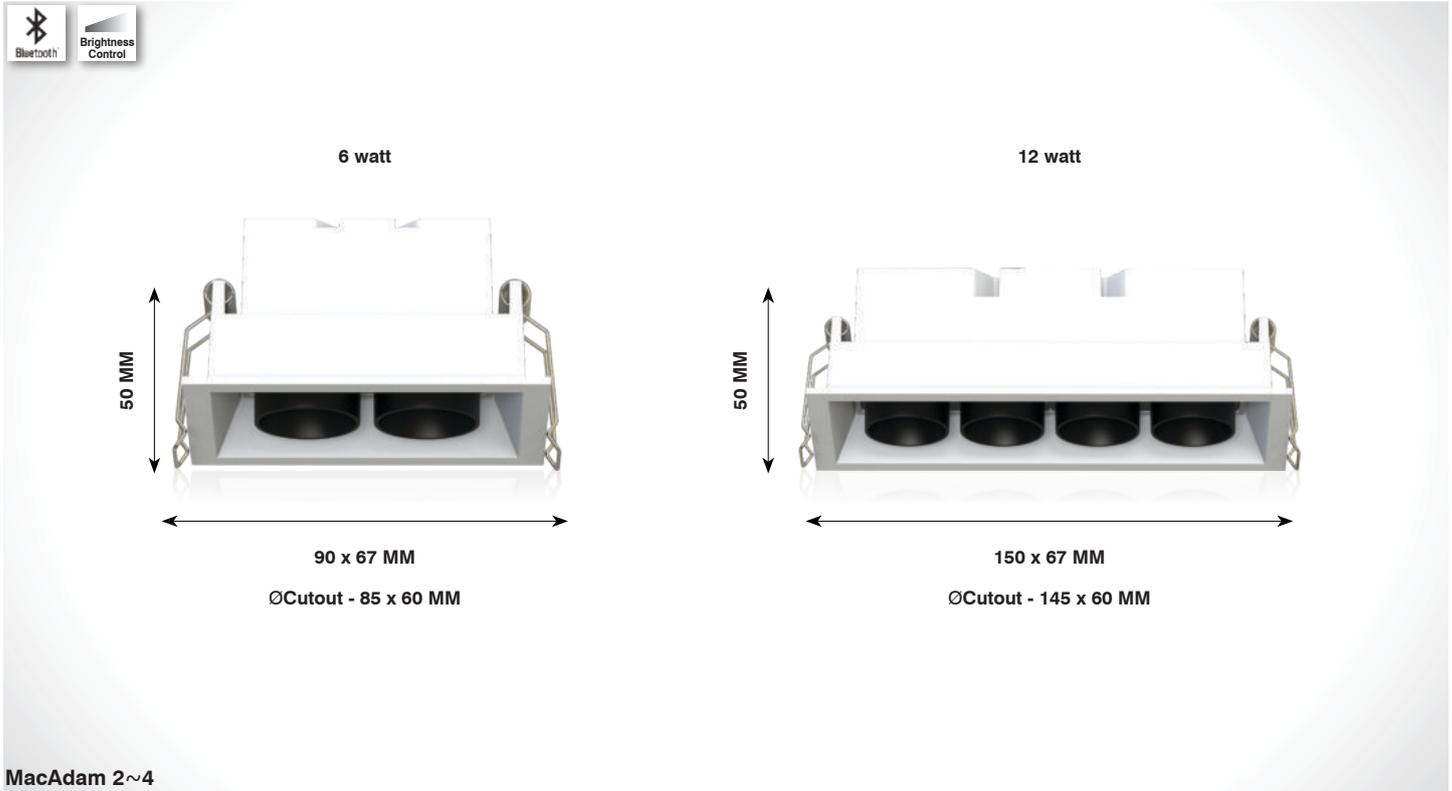


Available Body Colour : White Body & Inside Black


## ROVIGO



Product Code	CRI	CCT	Dimension (in mm)			Lumen	Driver Opt	System Specs	
SL-LB-326-6w-R-W.WHT	80 / 90	3000K	Diameter	Height	Cutout	660 lm	7-12V@700mA	<b>Housing</b>	Aluminium
SL-LB-326-6w-R-N.WHT		4000K	90x67	50	Ø85x60	720 lm		<b>LED Make</b>	Cree / Osram
SL-LB-326-6w-R-WHT		6500K				750 lm		<b>Driver Brands</b>	Fulham / Osram
								<b>Dimming</b>	Triac / 0-10v / Dali DT6
SL-LB-326-12w-R-W.WHT	80 / 90	3000K	Diameter	Height	Cutout	1320 lm	11-22V@700mA	<b>Housing</b>	Aluminium
SL-LB-326-12w-R-N.WHT		4000K	150x67	50	Ø145x60	1440 lm		<b>LED Make</b>	Cree / Osram
SL-LB-326-12w-R-WHT		6500K				1500 lm		<b>Driver Brands</b>	Osram / Fulham
								<b>Dimming</b>	Triac / 0-10v / Dali DT6

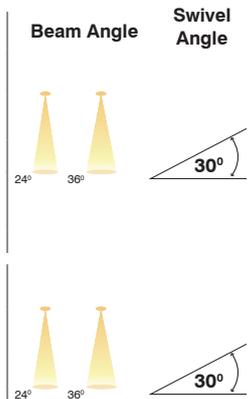

# ADJUSTABLE LASER BLADE

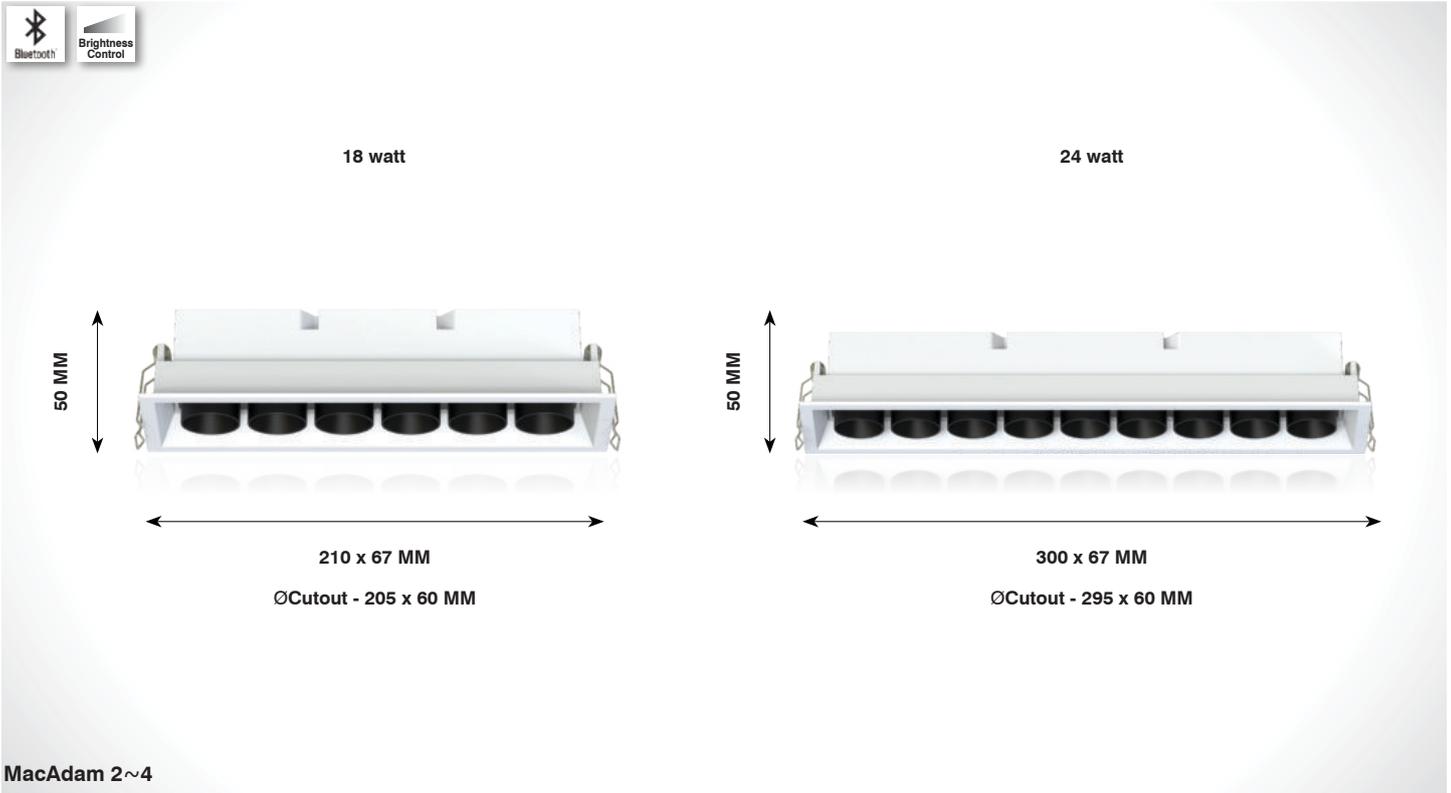


Available Body Colour : White Body & Inside Black


## ROVIGO



Product Code	CRI	CCT	Dimension (in mm)			Lumen	Driver Opt	System Specs	
SL-LB-326-18w-R-W.WHT	80 / 90	3000K	Diameter	Height	Cutout	1980 lm	18-24V@700mA	<b>Housing</b>	Aluminium
SL-LB-326-18w-R-N.WHT		4000K	210x67	50	Ø205x60	2160 lm		<b>LED Make</b>	Cree / Osram
SL-LB-326-18w-R-WHT		6500K				2250 lm		<b>Driver Brands</b>	Osram / Fulham
								<b>Dimming</b>	Triac / 0-10v / DALI DT6
SL-LB-326-24w-R-W.WHT	80 / 90	3000K	Diameter	Height	Cutout	2640 lm	27-32V@700mA	<b>Housing</b>	Aluminium
SL-LB-326-24w-R-N.WHT		4000K	300x67	50	Ø295x60	2880 lm		<b>LED Make</b>	Cree / Osram
SL-LB-326-24w-R-WHT		6500K				3000 lm		<b>Driver Brands</b>	Osram / Fulham
								<b>Dimming</b>	Triac / 0-10v / DALI DT6

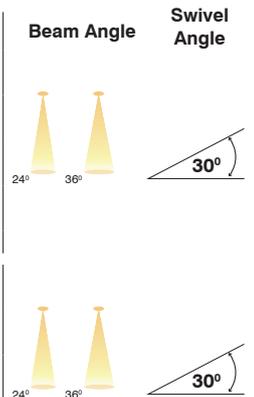

## L A S E R   B L A D E

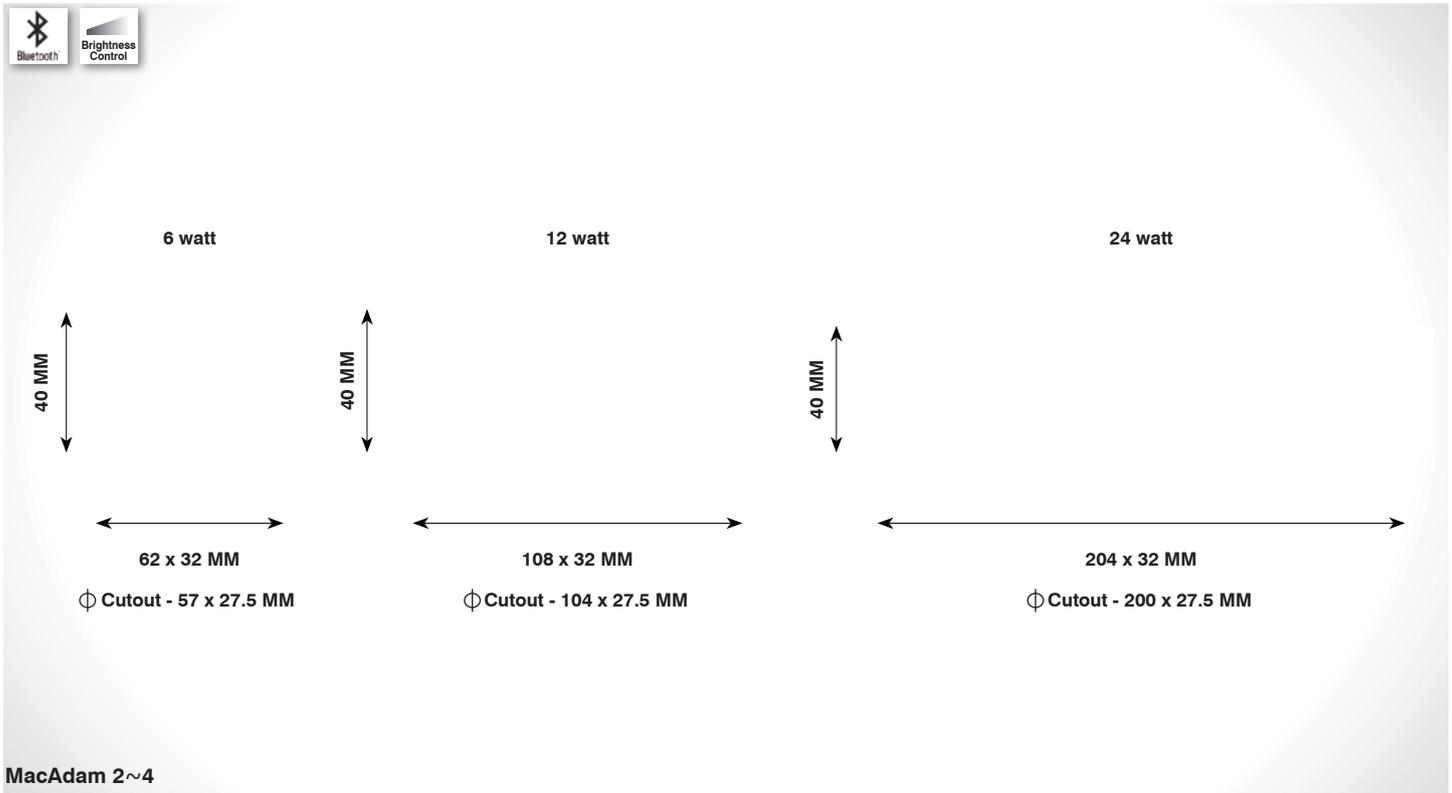




## S L I M - P E R L A

Product Code	CRI	CCT	Dimension (in mm)		Lumen	Driver Opt	System Specs	
SL-LB-228-6w-R-W.WHT	80 / 90	3000K	Diameter	Height	660 lm	7-12V@700mA	<b>Housing</b>	Aluminium
SL-LB-228-6w-R-N.WHT		4000K	62 x 32	40	720 lm		<b>LED Make</b>	Osram
SL-LB-228-6w-R-WHT		6500K			750 lm		<b>Driver Brands</b>	Fulham
							<b>Dimming</b>	Triac / 0-10v / Dali
SL-LB-228-12w-R-W.WHT	80 / 90	3000K	Diameter	Height	1320 lm	11-22V@700mA	<b>Housing</b>	Aluminium
SL-LB-228-12w-R-N.WHT		4000K	108 x 32	40	1440 lm		<b>LED Make</b>	Osram
SL-LB-228-12w-R-WHT		6500K			1500 lm		<b>Driver Brands</b>	Osram / Fulham
							<b>Dimming</b>	Triac / 0-10v / Dali
SL-LB-228-24w-R-W.WHT	80 / 90	3000K	Diameter	Height	2640 lm	27-42V@600mA	<b>Housing</b>	Aluminium
SL-LB-228-24w-R-N.WHT		4000K	204 x 32	40	2880 lm		<b>LED Make</b>	Osram
SL-LB-228-24w-R-WHT		6500K			3000 lm		<b>Driver Brands</b>	Osram / Fulham
							<b>Dimming</b>	Triac / 0-10v / Dali




**DIMMABLE**

**Beam Angle**



# L A S E R B L A D E

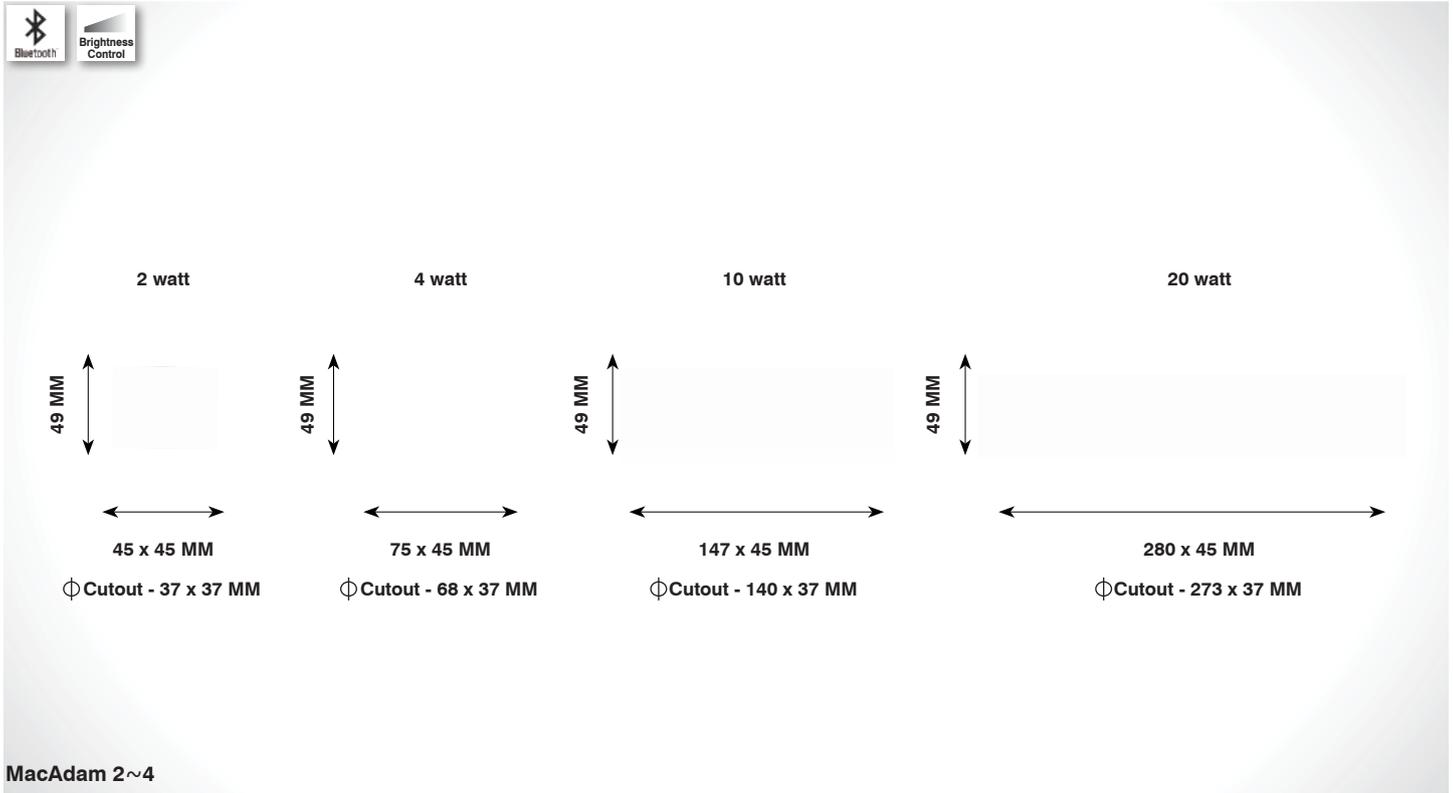


# P E R L A

Available Body Colour : Black



Product Code	CRI	CCT	Dimension (in mm)		Lumen	Driver Opt	System Specs	
SL-LB-250-2w-R-W.WHT	80 / 90	3000K	Diameter	Height	220 lm	3-10V@700mA	<b>Housing</b>	Aluminium
SL-LB-250-2w-R-N.WHT		4000K	45 x 45	49	240 lm		<b>LED Make</b>	Osram
SL-LB-250-2w-R-WHT		6500K			250 lm		<b>Driver Brands</b>	Srishti
							<b>Dimming</b>	Triac / 0-10v / Dali
SL-LB-250-4w-R-W.WHT	80 / 90	3000K	Diameter	Height	440 lm	3-10V@700mA	<b>Housing</b>	Aluminium
SL-LB-250-4w-R-N.WHT		4000K	75 x 45	49	480 lm		<b>LED Make</b>	Osram
SL-LB-250-4w-R-WHT		6500K			500 lm		<b>Driver Brands</b>	Srishti
							<b>Dimming</b>	Triac / 0-10v / Dali
SL-LB-250-10w-R-W.WHT	80 / 90	3000K	Diameter	Height	1100 lm	11-22V@700mA	<b>Housing</b>	Aluminium
SL-LB-250-10w-R-N.WHT		4000K	147 x 45	49	1200 lm		<b>LED Make</b>	Osram
SL-LB-250-10w-R-WHT		6500K			1250 lm		<b>Driver Brands</b>	Osram
							<b>Dimming</b>	Triac / 0-10v / Dali
SL-LB-250-20w-R-W.WHT	80 / 90	3000K	Diameter	Height	2200 lm	27-42V@600mA	<b>Housing</b>	Aluminium
SL-LB-250-20w-R-N.WHT		4000K	280 x 45	49	2400 lm		<b>LED Make</b>	Osram
SL-LB-250-20w-R-WHT		6500K			2500 lm		<b>Driver Brands</b>	Osram / Fulham
							<b>Dimming</b>	Triac / 0-10v / Dali

### Beam Angle




### Application



On request also available in CCT - 2700K / 3500K / 5000K

# L A S E R   B L A D E

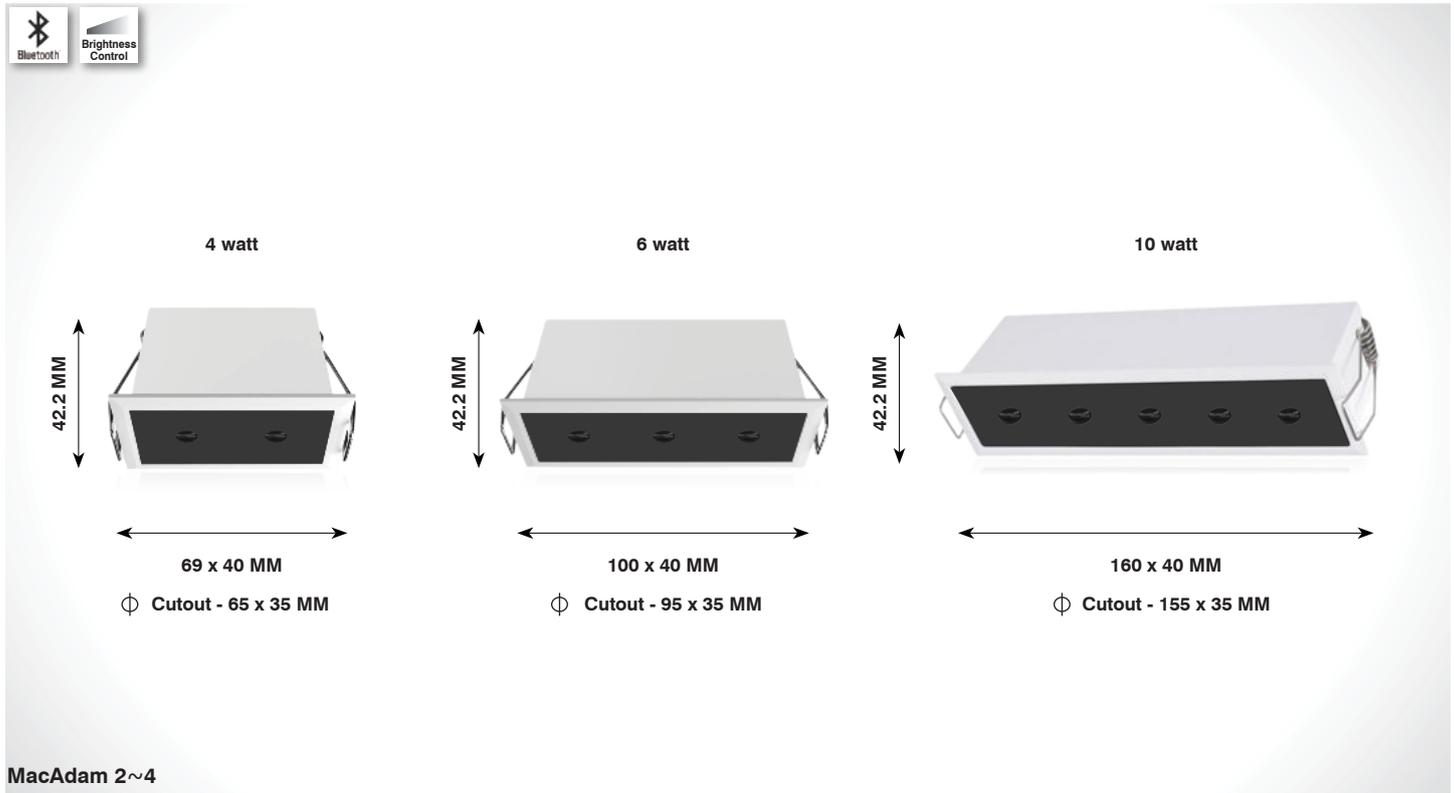




# L A B I B

Product Code	CRI	CCT	Dimension (in mm)		Lumen	Driver Opt	System Specs	
SL-LB-286-4w-R-W.WHT	80 / 90	3000K	Diameter	Height	440 lm	3-3.6 VDC@700mA	<b>Housing</b>	Aluminium
SL-LB-286-4w-R-N.WHT		4000K	69 x 40	42.2	480 lm		<b>LED Make</b>	Osram
SL-LB-286-4w-R-WHT		6500K			500 lm		<b>Driver Brands</b>	Srishti
							<b>Dimming</b>	Triac / 0-10v / Dali
SL-LB-286-6w-R-W.WHT	80 / 90	3000K	Diameter	Height	660 lm	7-12 VDC@700mA	<b>Housing</b>	Aluminium
SL-LB-286-6w-R-N.WHT		4000K	100 x 40	42.2	720 lm		<b>LED Make</b>	Osram
SL-LB-286-6w-R-WHT		6500K			750 lm		<b>Driver Brands</b>	Osram / Fulham
							<b>Dimming</b>	Triac / 0-10v / Dali
SL-LB-286-10w-R-W.WHT	80 / 90	3000K	Diameter	Height	1100 lm	8-15V@700mA	<b>Housing</b>	Aluminium
SL-LB-286-10w-R-N.WHT		4000K	160 x 40	42.2	1200 lm		<b>LED Make</b>	Osram
SL-LB-286-10w-R-WHT		6500K			1250 lm		<b>Driver Brands</b>	Osram / Fulham
							<b>Dimming</b>	Triac / 0-10v / Dali



**DIMMABLE**

**Beam Angle**



# L A S E R   B L A D E



# A Z U L

## Wall Washer

Product Code	CRI	CCT	Dimension (in mm)			Lumen	Driver Opt	System Specs	
SL-LB-259-10w-R-W.WHT	80 / 90	3000K	Diameter	Height	Cutout	1100 lm	9-16 VDC@700mA	<b>Housing</b>	Aluminium
SL-LB-259-10w-R-N.WHT		4000K	147 x 45	49	Φ140 x 37	1200 lm		<b>LED Make</b>	Osram
SL-LB-259-10w-R-WHT		6500K				1250 lm		<b>Driver Brands</b>	Osram / Fulham
								<b>Dimming</b>	Triac / 0-10v / Dali




DIMMABLE

Beam Angle



24°

## L A S E R B L A D E

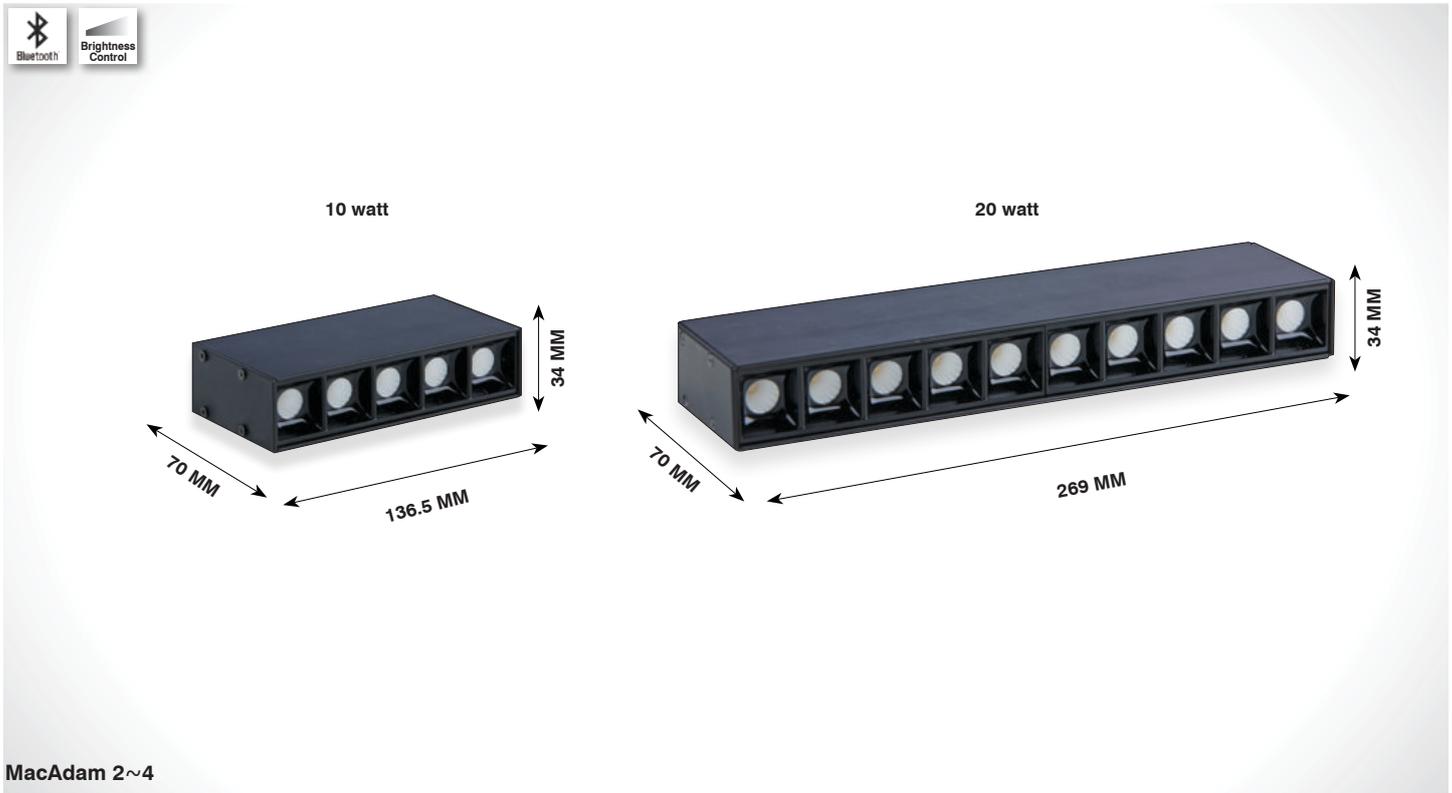

## C A N T O

Product Code	CRI	CCT	Dimension (in mm)		Lumen	Driver Opt	System Specs	
SL-SLB-249-10w-R-W.WHT	80 / 90	3000K	Diameter	Height	1100 lm	9-16 VDC@700mA	<b>Housing</b>	Aluminium
SL-SLB-249-10w-R-N.WHT		4000K	136.5 x 34	70	1200 lm		<b>LED Make</b>	Osram
SL-SLB-249-10w-R-WHT		6500K			1250 lm		<b>Driver Brands</b>	Srishti
							<b>Dimming</b>	Triac / 0-10v / Dali
SL-SLB-249-20w-R-W.WHT	80 / 90	3000K	Diameter	Height	2200 lm	25-35 VDC@600mA	<b>Housing</b>	Aluminium
SL-SLB-249-20w-R-N.WHT		4000K	269 x 34	70	2400 lm		<b>LED Make</b>	Osram
SL-SLB-249-20w-R-WHT		6500K			2500 lm		<b>Driver Brands</b>	Srishti
							<b>Dimming</b>	Triac / 0-10v / Dali

### Beam Angle





SURFACE DOWN  
LIGHT SERIES





## SURFACE DOWN LIGHT



## MENTOR

Product Code	CRI	CCT	Dimension (in mm)		Lumen	Driver Opt	System Specs	
SL-SDL-236-7w-R-W.WHT	80 / 90	3000K	Diameter	Height	770 lm	36-42V@150mA	<b>Housing</b>	Aluminium
SL-SDL-236-7w-R-N.WHT		4000K	55	75	840 lm		<b>LED Make</b>	Citizen / Cree / Bridgelux
SL-SDL-236-7w-R-WHT		6500K			875 lm		<b>Driver Brands</b>	Srishti
SL-SDL-221-12w-R-W.WHT	80 / 90	3000K	Diameter	Height	1320 lm	36-42V@300mA	<b>Housing</b>	Aluminium
SL-SDL-221-12w-R-N.WHT		4000K	74	100	1440 lm		<b>LED Make</b>	Citizen / Cree / Bridgelux
SL-SDL-221-12w-R-WHT		6500K			1500 lm		<b>Driver Brands</b>	Srishti
SL-SDL-222-20w-R-W.WHT	80 / 90	3000K	Diameter	Height	2200 lm	36-42V@400mA	<b>Housing</b>	Aluminium
SL-SDL-222-20w-R-N.WHT		4000K	94	113	2400 lm		<b>LED Make</b>	Citizen / Cree / Bridgelux
SL-SDL-222-20w-R-WHT		6500K			2500 lm		<b>Driver Brands</b>	Srishti
SL-SDL-223-30w-R-W.WHT	80 / 90	3000K	Diameter	Height	3300 lm	36-42V@750mA	<b>Housing</b>	Aluminium
SL-SDL-223-30w-R-N.WHT		4000K	115	125	3600 lm		<b>LED Make</b>	Citizen / Cree / Bridgelux
SL-SDL-223-30w-R-WHT		6500K			3750 lm		<b>Driver Brands</b>	Srishti

### Beam Angle







## SURFACE DOWN LIGHT



## SIMBAR


Product Code	CRI	CCT	Dimension (in mm)		Lumen	Driver Opt	System Specs	
SL-SDL-237-7w-R-W.WHT	80 / 90	3000K	Diameter	Height	770 lm	36-42V@150mA	<b>Housing</b>	Aluminium
SL-SDL-237-7w-R-N.WHT		4000K	55	75	840 lm		<b>LED Make</b>	Citizen / Cree / Bridgelux
SL-SDL-237-7w-R-WHT		6500K			875 lm		<b>Driver Brands</b>	Srishti
SL-SDL-224-12w-R-W.WHT	80 / 90	3000K	Diameter	Height	1320 lm	36-42V@300mA	<b>Housing</b>	Aluminium
SL-SDL-224-12w-R-N.WHT		4000K	74	100	1440 lm		<b>LED Make</b>	Citizen / Cree / Bridgelux
SL-SDL-224-12w-R-WHT		6500K			1500 lm		<b>Driver Brands</b>	Srishti
SL-SDL-225-20w-R-W.WHT	80 / 90	3000K	Diameter	Height	2200 lm	36-42V@400mA	<b>Housing</b>	Aluminium
SL-SDL-225-20w-R-N.WHT		4000K	94	113	2400 lm		<b>LED Make</b>	Citizen / Cree / Bridgelux
SL-SDL-225-20w-R-WHT		6500K			2500 lm		<b>Driver Brands</b>	Srishti
SL-SDL-226-30w-R-W.WHT	80 / 90	3000K	Diameter	Height	3300 lm	36-42V@750mA	<b>Housing</b>	Aluminium
SL-SDL-226-30w-R-N.WHT		4000K	115	125	3600 lm		<b>LED Make</b>	Citizen / Cree / Bridgelux
SL-SDL-226-30w-R-WHT		6500K			3750 lm		<b>Driver Brands</b>	Srishti

### Beam Angle



### Application



## SURFACE DOWN LIGHT

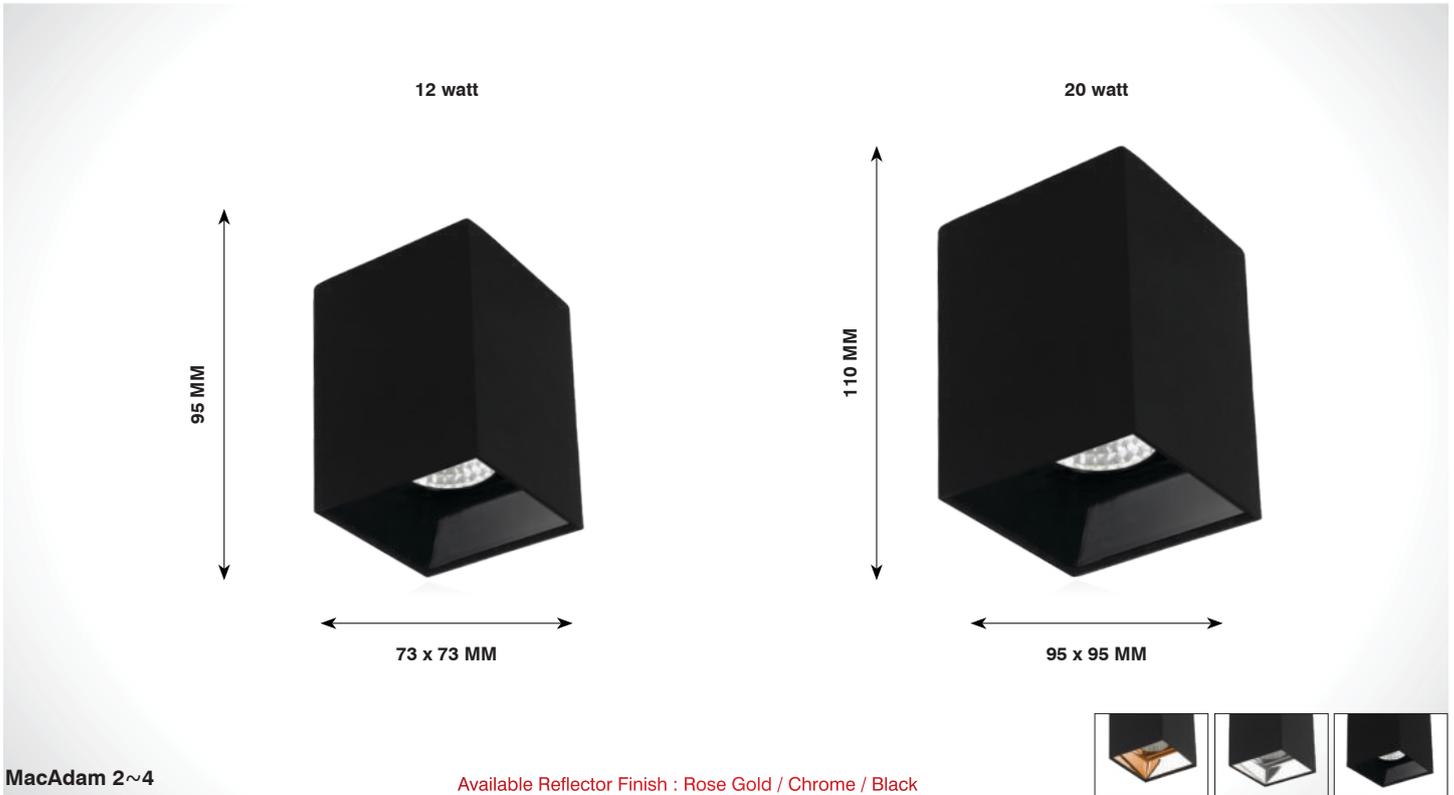


## PALLAS

Product Code	CRI	CCT	Dimension (in mm)		Lumen	Driver Opt	System Specs	
SL-SDL-245-12w-S-W.WHT	80 / 90	3000K	Diameter	Height	1320 lm	36-42V@300mA	<b>Housing</b>	Aluminium
SL-SDL-245-12w-S-N.WHT		4000K	73 x 73	95	1440 lm		<b>LED Make</b>	Citizen / Cree / Bridgelux
SL-SDL-245-12w-S-WHT		6500K			1500 lm		<b>Driver Brands</b>	Srishti
SL-SDL-246-20w-S-W.WHT	80 / 90	3000K	Diameter	Height	2200 lm	36-42V@400mA	<b>Housing</b>	Aluminium
SL-SDL-246-20w-S-N.WHT		4000K	95 x 95	110	2400 lm		<b>LED Make</b>	Citizen / Cree / Bridgelux
SL-SDL-246-20w-S-WHT		6500K			2500 lm		<b>Driver Brands</b>	Srishti

### Beam Angle





## SURFACE DOWN LIGHT

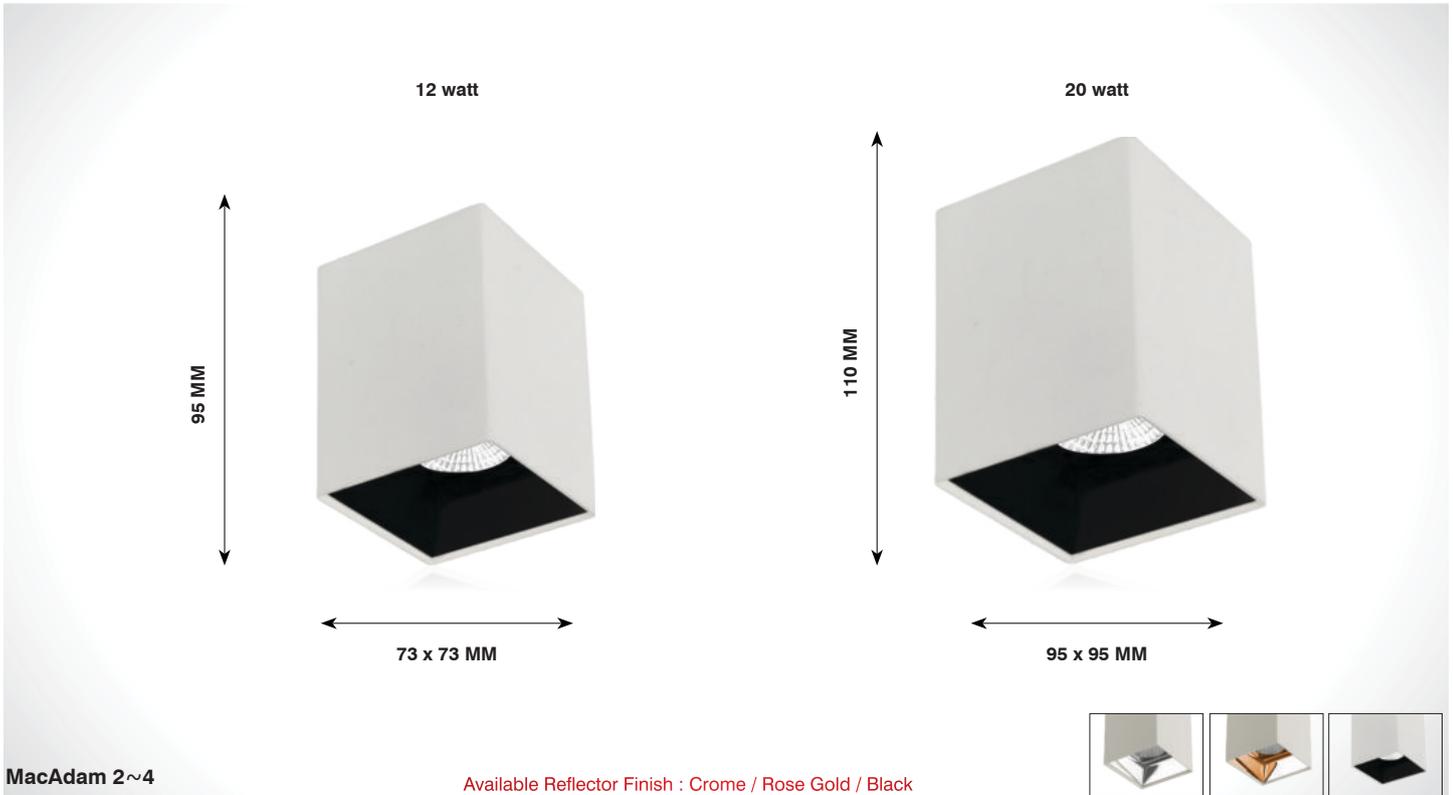

## SOLON

Product Code	CRI	CCT	Dimension (in mm)		Lumen	Driver Opt	System Specs	
SL-SDL-247-12w-S-W.WHT	80 / 90	3000K	Diameter	Height	1320 lm	36-42V@300mA	<b>Housing</b>	Aluminium
SL-SDL-247-12w-S-N.WHT		4000K	73 x 73	95	1440 lm		<b>LED Make</b>	Citizen / Cree / Bridgelux
SL-SDL-247-12w-S-WHT		6500K			1500 lm		<b>Driver Brands</b>	Srishti
SL-SDL-248-20w-S-W.WHT	80 / 90	3000K	Diameter	Height	2200 lm	36-42V@400mA	<b>Housing</b>	Aluminium
SL-SDL-248-20w-S-N.WHT		4000K	95 x 95	110	2400 lm		<b>LED Make</b>	Citizen / Cree / Bridgelux
SL-SDL-248-20w-S-WHT		6500K			2500 lm		<b>Driver Brands</b>	Srishti

### Beam Angle



## SURFACE DOWN LIGHT

**NEW**




Available Body Finish : White / Black / Grey  
Available Reflector Finish : White / Black / Rose Gold



## GREX

Product Code	CRI	CCT	Dimension (in mm)		Lumen	Driver Opt	System Specs	
SL-SDL-381-12w-R-W.WHT	80 / 90	3000K	Diameter	Height	1320 lm	36-42V@300mA	<b>Housing</b>	Aluminium
SL-SDL-381-12w-R-N.WHT		4000K	72	80	1440 lm		<b>LED Make</b>	Citizen / Cree / Bridgelux
SL-SDL-381-12w-R-WHT		6500K			1500 lm		<b>Driver Brands</b>	Srishti

Beam Angle



# SURFACE DOWN LIGHT





MacAdam 2~4

Available Body Finish : White / Black / Gun Metal

## FINN



Product Code	CRI	CCT	Dimension (in mm)		Lumen	Driver Opt	System Specs	
SL-SDL-401-7w-R-W.WHT	80 / 90	3000K	Diameter	Height	770 lm	36-42V@150mA	<b>Housing</b>	Aluminium
SL-SDL-401-7w-R-N.WHT		4000K	60	100	840 lm		<b>LED Make</b>	Citizen / Cree / Bridgelux
SL-SDL-401-7w-R-WHT		6500K			875 lm		<b>Driver Brands</b>	Srishti
SL-SDL-401-12w-R-W.WHT	80 / 90	3000K	Diameter	Height	1320 lm	36-42V@300mA	<b>Housing</b>	Aluminium
SL-SDL-401-12w-R-N.WHT		4000K	60	110	1440 lm		<b>LED Make</b>	Citizen / Cree / Bridgelux
SL-SDL-401-12w-R-WHT		6500K			1500 lm		<b>Driver Brands</b>	Srishti





ZOOM LIGHT SERIES


## ZOOM LIGHT




## ALMIRA



Product Code	CRI	CCT	Dimension (in mm)			Lumen	Driver Opt	System Specs	
			Diameter	Height	Cutout			Housing	LED Make
SL-ZL-159-10w-R-W.WHT	80 / 90	3000K				1100 lm	36-42V@250mA	Aluminium	
SL-ZL-159-10w-R-N.WHT		4000K	94	70	∅ 85	1200 lm		Citizen / Cree / Bridgelux	
SL-ZL-159-10w-R-WHT		6500K				1250 lm		Philips	
								Triac / 0-10v / Dali	
SL-ZL-159-15w-R-W.WHT	80 / 90	3000K				1650 lm	36-42V@300mA	Aluminium	
SL-ZL-159-15w-R-N.WHT		4000K	94	70	∅ 85	1800 lm		Citizen / Cree / Bridgelux	
SL-ZL-159-15w-R-WHT		6500K				1875 lm		Philips	
								Triac / 0-10v / Dali	

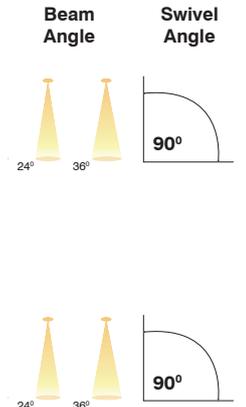


## ZOOM LIGHT

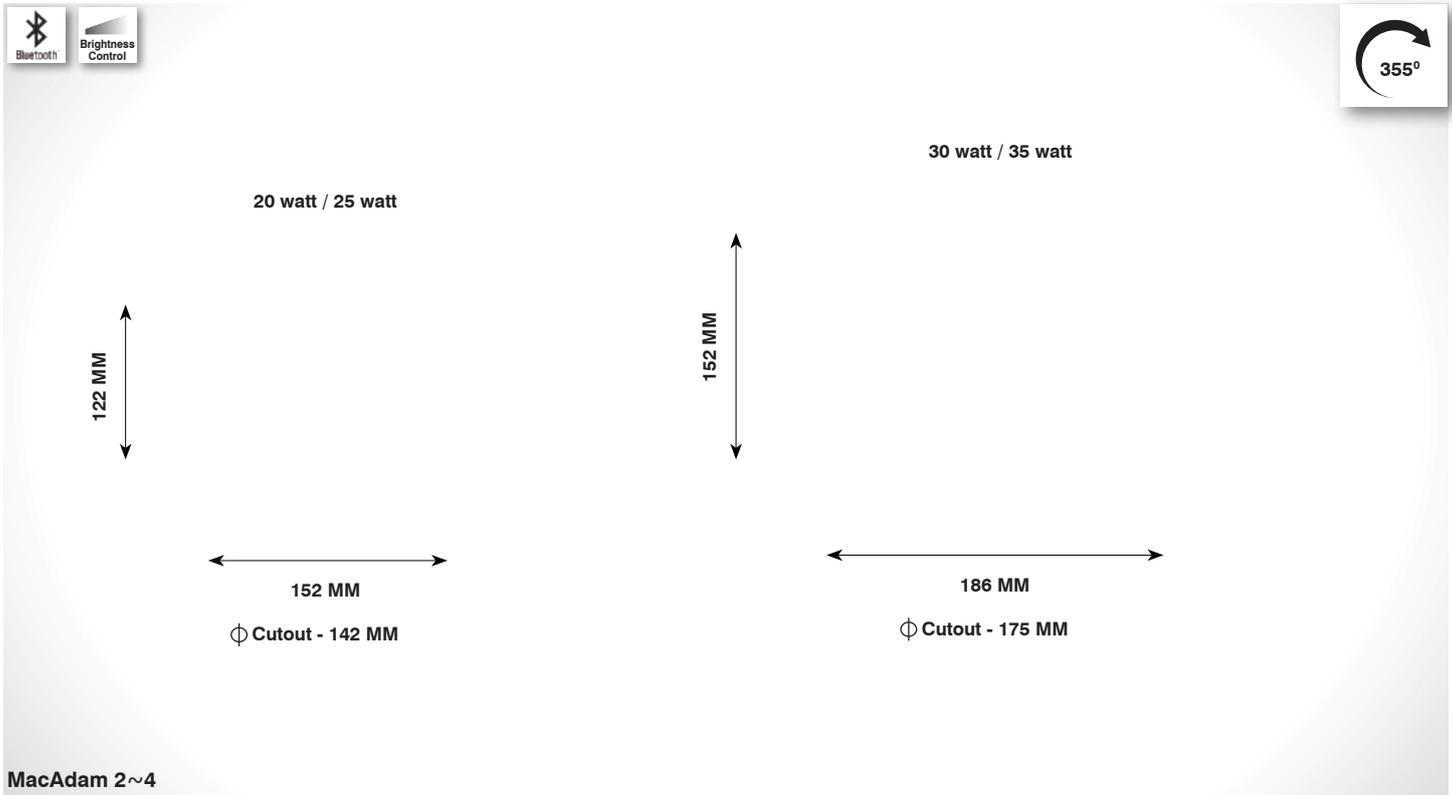


## FOTIS



Product Code	CRI	CCT	Dimension (in mm)			Lumen	Driver Opt	System Specs	
SL-ZL-256-20w-R-W.WHT	80 / 90	3000K	Diameter	Height	Cutout	2200 lm	36-42V@500mA	<b>Housing</b>	Aluminium
SL-ZL-256-20w-R-N.WHT		4000K	152	122	φ142	2400 lm		<b>LED Make</b>	Citizen / Cree / Bridgelux
SL-ZL-256-20w-R-WHT		6500K				2500 lm		<b>Driver Brands</b>	Fulham
								<b>Dimming</b>	Triac / 0-10v / Dali
SL-ZL-256-25w-R-W.WHT	80 / 90	3000K	Diameter	Height	Cutout	2750 lm	36-42V@700mA	<b>Housing</b>	Aluminium
SL-ZL-256-25w-R-N.WHT		4000K	152	122	φ142	3000 lm		<b>LED Make</b>	Citizen / Cree / Bridgelux
SL-ZL-256-25w-R-WHT		6500K				3125 lm		<b>Driver Brands</b>	Fulham
								<b>Dimming</b>	Triac / 0-10v / Dali
SL-ZL-256-30w-R-W.WHT	80 / 90	3000K	Diameter	Height	Cutout	3300 lm	36-42V@750mA	<b>Housing</b>	Aluminium
SL-ZL-256-30w-R-N.WHT		4000K	186	152	φ175	3600 lm		<b>LED Make</b>	Citizen / Cree / Bridgelux
SL-ZL-256-30w-R-WHT		6500K				3750 lm		<b>Driver Brands</b>	Fulham
								<b>Dimming</b>	Triac / 0-10v / Dali
SL-ZL-256-35w-R-W.WHT	80 / 90	3000K	Diameter	Height	Cutout	3850 lm	36-42V@800mA	<b>Housing</b>	Aluminium
SL-ZL-256-35w-R-N.WHT		4000K	186	152	φ175	4200 lm		<b>LED Make</b>	Citizen / Cree / Bridgelux
SL-ZL-256-35w-R-WHT		6500K				4375 lm		<b>Driver Brands</b>	Fulham
								<b>Dimming</b>	Triac / 0-10v / Dali

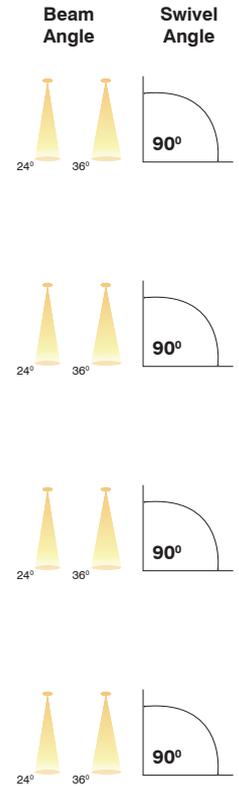

On request also available in CCT - 2700K / 3500K / 5000K

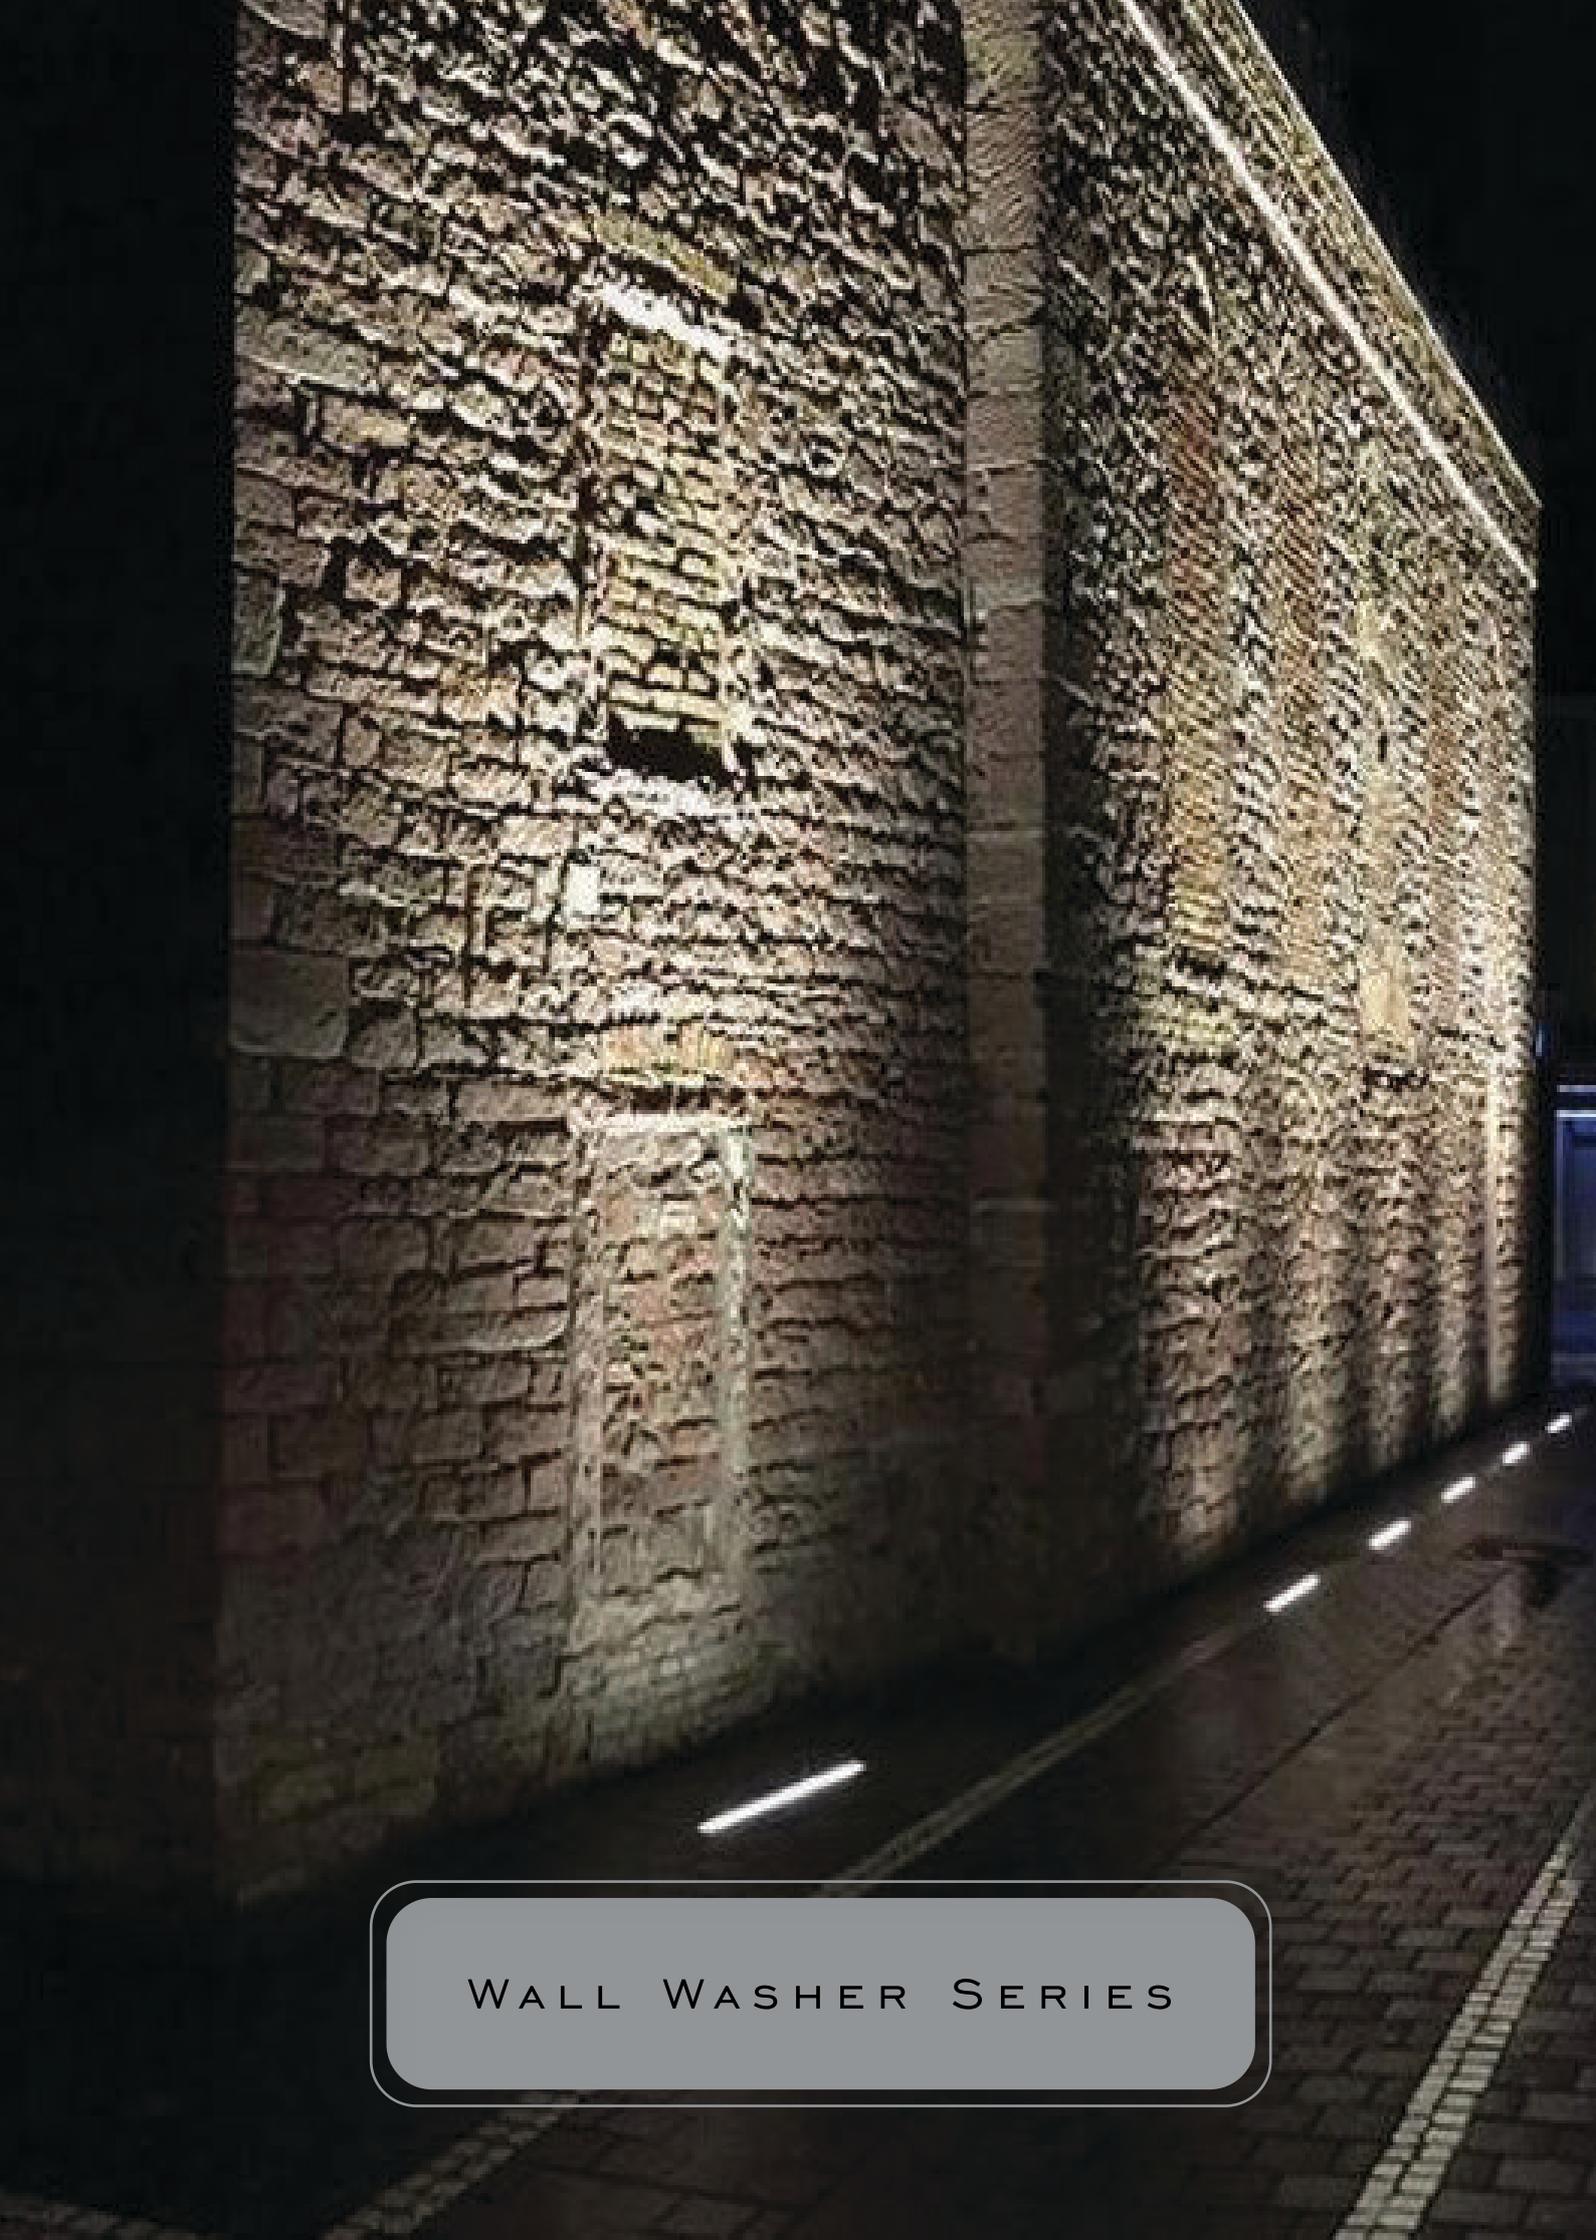

WALL WASHER SERIES


## WALL WASHER



## SUPRA




Product Code	CRI	CCT	Dimension (in mm)			Lumen	Driver Opt	System Specs	
			Length	Hight	Cutout			Housing	LED Make
SL-WW-340-15w-R-W.WHT	80 / 90	3000K	Length	Hight	Cutout	1650 lm	66-78V@180mA	Housing	Aluminium
SL-WW-340-15w-R-N.WHT		4000K	400	13	Φ13	1800 lm		LED Make	Citizen / Cree / Bridgelux
SL-WW-340-15w-R-WHT		6500K				1875 lm		Driver Brands	Srishti
SL-WW-340-20w-R-W.WHT	80 / 90	3000K	Length	Hight	Cutout	2200 lm	66-78V@240mA	Housing	Aluminium
SL-WW-340-20w-R-N.WHT		4000K	800	13	Φ13	2400 lm		LED Make	Citizen / Cree / Bridgelux
SL-WW-340-20w-R-WHT		6500K				2500 lm		Driver Brands	Srishti
SL-WW-340-25w-R-W.WHT	80 / 90	3000K	Length	Hight	Cutout	2750 lm	66-78V@300mA	Housing	Aluminium
SL-WW-340-25w-R-N.WHT		4000K	1000	13	Φ13	3000 lm		LED Make	Citizen / Cree / Bridgelux
SL-WW-340-25w-R-WHT		6500K				3125 lm		Driver Brands	Srishti

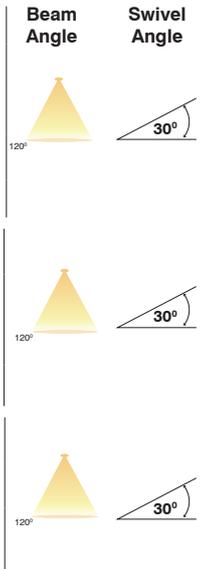

# ASYMMETRIC WALL WASHER

**NEW**

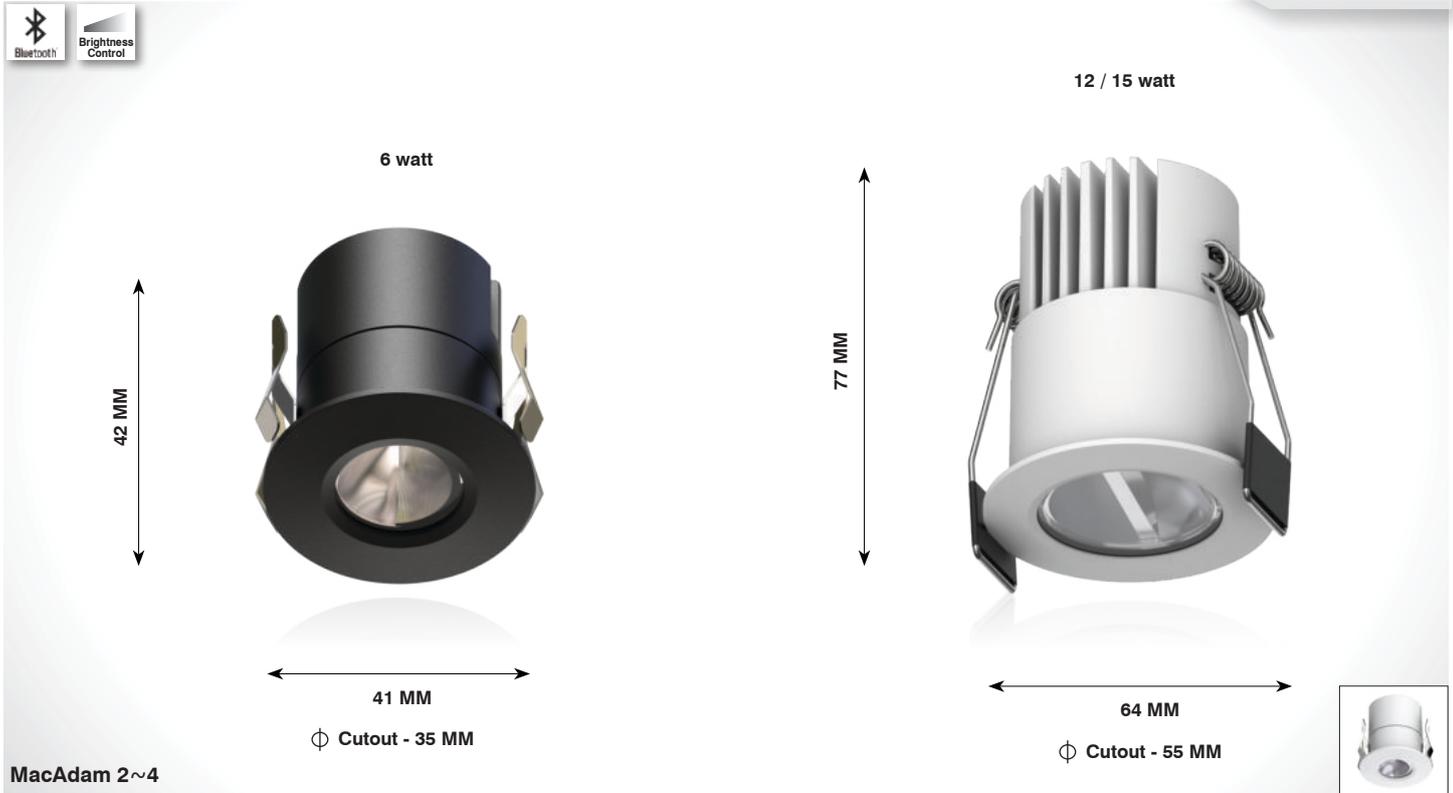

MacAdam 2~4

## DANIC


Available Body Finish : White / Black

Asymmetric Beam

Product Code	CRI	CCT	Dimension (in mm)			Lumen	Driver Opt	System Specs	
SL-WW-371-6w-R-W.WHT	80 / 90	3000K	Diameter	Hight	Cutout	660 lm	36-42V@150mA	<b>Housing</b>	Aluminium
SL-WW-371-6w-R-N.WHT		4000K	41	42	Φ 35	720 lm		<b>LED Make</b>	Citizen / Cree / Bridgelux
SL-WW-371-6w-R-WHT		6500K				750 lm		<b>Driver Brands</b>	Philips / Fulham / Osram
SL-WW-371-12w-R-W.WHT	80 / 90	3000K	Diameter	Hight	Cutout	1320 lm	36-42V@300mA	<b>Housing</b>	Aluminium
SL-WW-371-12w-R-N.WHT		4000K	64	77	Φ 55	1440 lm		<b>LED Make</b>	Citizen / Cree / Bridgelux
SL-WW-371-12w-R-WHT		6500K				1500 lm		<b>Driver Brands</b>	Philips / Fulham / Osram
SL-WW-371-15w-R-W.WHT	80 / 90	3000K	Diameter	Hight	Cutout	1650 lm	36-42V@350mA	<b>Housing</b>	Aluminium
SL-WW-371-15w-R-N.WHT		4000K	64	77	Φ 55	1800 lm		<b>LED Make</b>	Citizen / Cree / Bridgelux
SL-WW-371-15w-R-WHT		6500K				1875 lm		<b>Driver Brands</b>	Philips / Fulham / Osram

# WALL WASHER

**NEW**

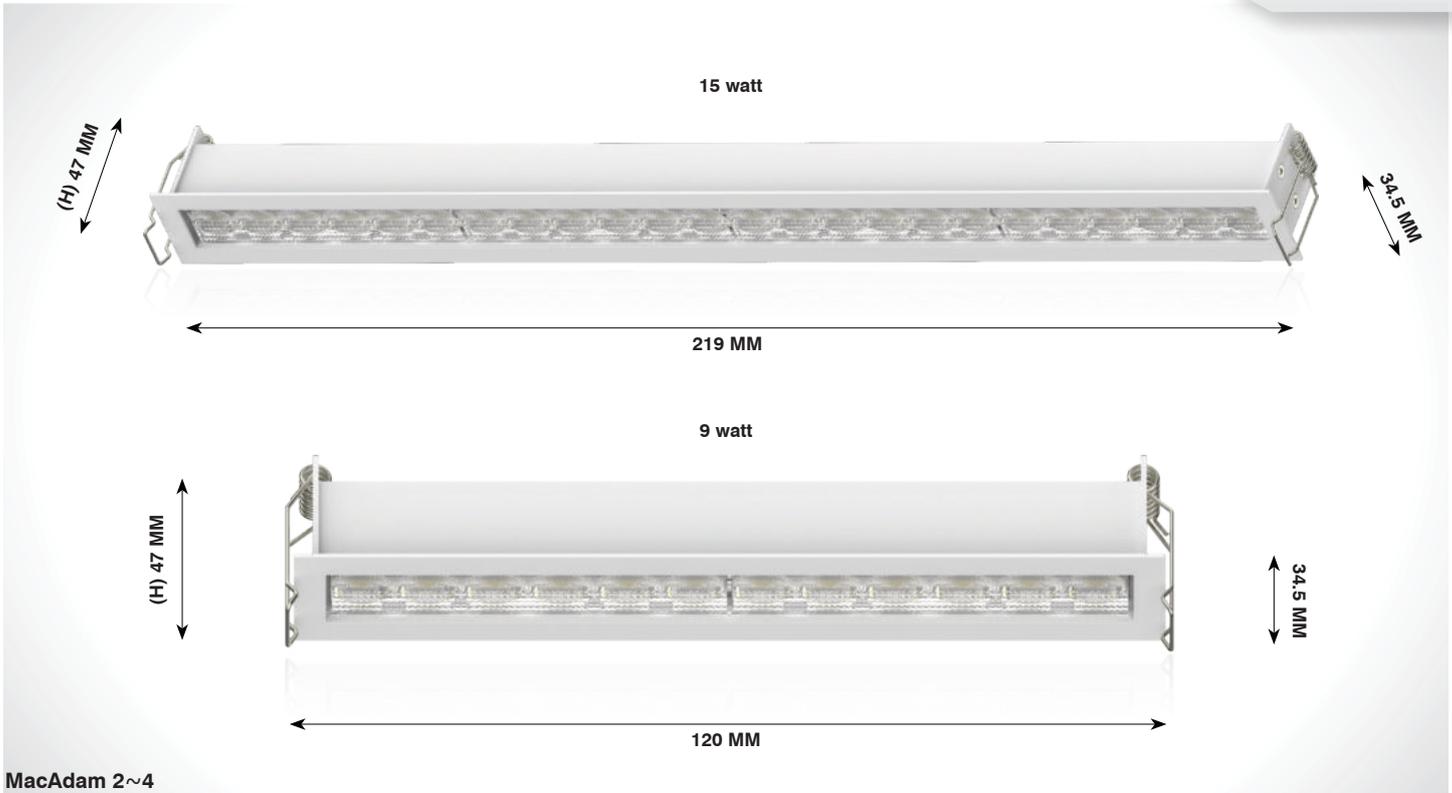

MacAdam 2~4

# R A Z E

Product Code	CRI	CCT	Dimension (in mm)			Lumen	Driver Opt	System Specs	
			Length	Width	Height			Housing	LED Make
SL-LBWW-372-9w-R-W.WHT	80 / 90	3000K				990 lm	11-22V@700mA	Aluminium	
SL-LBWW-372-9w-R-N.WHT		4000K	120	34.5	47	1080 lm		Citizen / Cree / Bridgelux	
SL-LBWW-372-9w-R-WHT		6500K				1125 lm		Osram / Fulham	
								Triac / 0-10v / Dali	
SL-LBWW-372-15w-R-W.WHT	80 / 90	3000K				1650 lm	27-42V@600mA	Aluminium	
SL-LBWW-372-15w-R-N.WHT		4000K	219	34.5	47	1800 lm		Citizen / Cree / Bridgelux	
SL-LBWW-372-15w-R-WHT		6500K				1875 lm		Osram / Fulham	
								Triac / 0-10v / Dali	

Beam Angle



120°



120°

A modern interior scene featuring a dining table and chairs, track lighting, and a decorative wall panel. The table is square with a light wood top and dark metal legs. Two chairs with light wood seats and backs and dark metal frames are positioned around the table. A glass vase with dried plants sits on the table. The background wall is split into a dark grey section and a lighter, textured grey section. Track lighting is mounted on the ceiling, with several spotlights illuminating the scene. A semi-transparent rounded rectangle is overlaid on the wall, containing the text "TRACK LIGHT SERIES".

TRACK LIGHT SERIES

## TRACKSPOT




MacAdam 2~4

## SAPPHIRE



Product Code	CRI	CCT	Dimension (in mm)		Lumen	Driver Opt	System Specs	
SL-TL-117-20w-R-W.WHT	80 / 90	3000K	Diameter	Height	2200 lm	36-42V@500mA	<b>Housing</b>	Aluminium
SL-TL-117-20w-R-N.WHT		4000K	90	245	2400 lm		<b>LED Make</b>	Citizen / Cree / Bridgelux
SL-TL-117-20w-R-WHT		6500K			2500 lm		<b>Driver Brands</b>	Fulham
							<b>Dimming</b>	Triac / 0-10v / Dali
SL-TL-117-25w-R-W.WHT	80 / 90	3000K	Diameter	Height	2750 lm	36-42V@700mA	<b>Housing</b>	Aluminium
SL-TL-117-25w-R-N.WHT		4000K	90	245	3000 lm		<b>LED Make</b>	Citizen / Cree / Bridgelux
SL-TL-117-25w-R-WHT		6500K			3125 lm		<b>Driver Brands</b>	Fulham
							<b>Dimming</b>	Triac / 0-10v / Dali
SL-TL-117-30w-R-W.WHT	80 / 90	3000K	Diameter	Height	3300 lm	36-42V@750mA	<b>Housing</b>	Aluminium
SL-TL-117-30w-R-N.WHT		4000K	128	245	3600 lm		<b>LED Make</b>	Citizen / Cree / Bridgelux
SL-TL-117-30w-R-WHT		6500K			3750 lm		<b>Driver Brands</b>	Fulham
							<b>Dimming</b>	Triac / 0-10v / Dali
SL-TL-117-35w-R-W.WHT	80 / 90	3000K	Diameter	Height	3850 lm	36-42V@800mA	<b>Housing</b>	Aluminium
SL-TL-117-35w-R-N.WHT		4000K	128	245	4200 lm		<b>LED Make</b>	Citizen / Cree / Bridgelux
SL-TL-117-35w-R-WHT		6500K			4375 lm		<b>Driver Brands</b>	Fulham
							<b>Dimming</b>	Triac / 0-10v / Dali

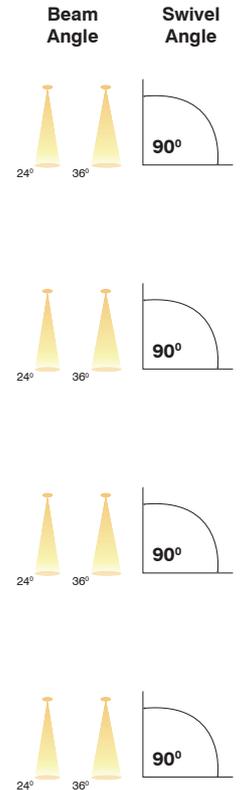

On request also available in CCT - 2700K / 3500K / 5000K


# TRACKSPOT




# DAWN



Product Code	CRI	CCT	Dimension (in mm)	Lumen	Driver Opt	System Specs	
SL-TL-160-15w-R-W.WHT	80 / 90	3000K	Diameter	1650 lm	36-42V@350mA	<b>Housing</b>	Aluminium
SL-TL-160-15w-R-N.WHT		4000K	78 x 192	1800 lm		<b>LED Make</b>	Citizen / Cree / Bridgelux
SL-TL-160-15w-R-WHT		6500K		1875 lm		<b>Driver Brands</b>	Fulham
						<b>Dimming</b>	Triac / 0-10v / Dali
SL-TL-160-25w-R-W.WHT	80 / 90	3000K	Diameter	2750 lm	36-42V@700mA	<b>Housing</b>	Aluminium
SL-TL-160-25w-R-N.WHT		4000K	110 x 220	3000 lm		<b>LED Make</b>	Citizen / Cree / Bridgelux
SL-TL-160-25w-R-WHT		6500K		3125 lm		<b>Driver Brands</b>	Fulham
						<b>Dimming</b>	Triac / 0-10v / Dali
SL-TL-160-40w-R-W.WHT	80 / 90	3000K	Diameter	4400 lm	36-42V@850mA	<b>Housing</b>	Aluminium
SL-TL-160-40w-R-N.WHT		4000K	130 x 220	4800 lm		<b>LED Make</b>	Citizen / Cree / Bridgelux
SL-TL-160-40w-R-WHT		6500K		5000 lm		<b>Driver Brands</b>	Fulham
						<b>Dimming</b>	Triac / 0-10v / Dali

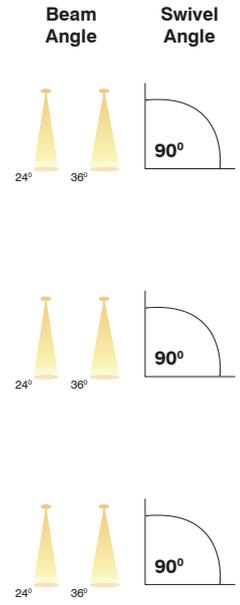

## TRACKSPOT

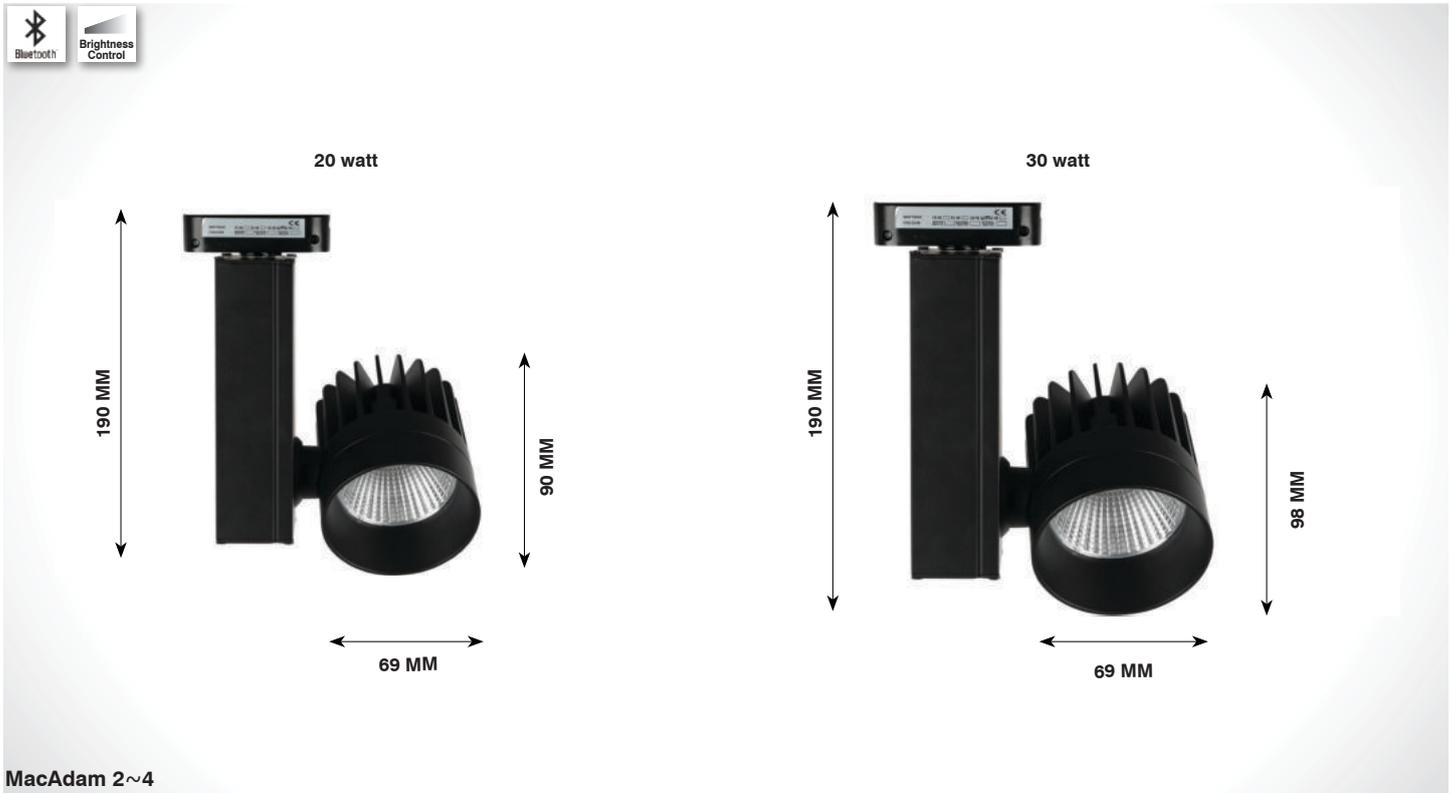


MacAdam 2~4

Available Body Finish : Black / White

## DUKE



Product Code	CRI	CCT	Dimension (in mm)		Lumen	Driver Opt	System Specs	
			Diameter	Length			Housing	LED Make
SL-TL-265-20w-R-W.WHT	80 / 90	3000K			2200 lm	36-42V@610mA	Aluminium	
SL-TL-265-20w-R-N.WHT		4000K	90 x 69	190	2400 lm		Citizen / Cree / Bridgelux	
SL-TL-265-20w-R-WHT		6500K			2500 lm		Philips / Fulham	
							Triac / 0-10v / Dali	
SL-TL-265-30w-R-W.WHT	80 / 90	3000K			3300 lm	36-42V@750mA	Aluminium	
SL-TL-265-30w-R-N.WHT		4000K	98 x 69	190	3600 lm		Citizen / Cree / Bridgelux	
SL-TL-265-30w-R-WHT		6500K			3750 lm		Philips / Fulham	
							Triac / 0-10v / Dali	

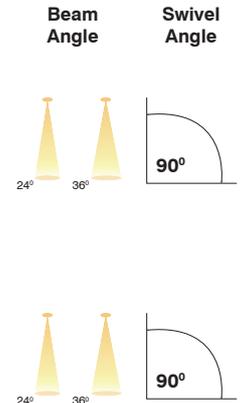


## TRACKSPOT



## SOREN

Product Code	CRI	CCT	Dimension (in mm)		Lumen	Driver Opt	System Specs	
			Diameter	Length			Housing	LED Make
SL-TL-264-6w-R-W.WHT	80 / 90	3000K			660 lm	36-42V@150mA	Aluminium	
SL-TL-264-6w-R-N.WHT		4000K	42	134	720 lm		Cree / Bridgelux	
SL-TL-264-6w-R-WHT		6500K			750 lm		Philips	

Beam Angle Swivel Angle




# TRACKSPOT



# FLAME

Product Code	CRI	CCT	Dimension (in mm)		Lumen	Driver Opt	System Specs	
SL-TL-210-15w-R-W.WHT	80 / 90	3000K	Diameter	Length	1650 lm	36-42V@350mA	<b>Housing</b>	Aluminium
SL-TL-210-15w-R-N.WHT		4000K	60	82	1800 lm		<b>LED Make</b>	Citizen / Cree / Bridgelux
SL-TL-210-15w-R-WHT		6500K			1875 lm		<b>Driver Brands</b>	Fulham
							<b>Dimming</b>	Triac / 0-10v / Dali

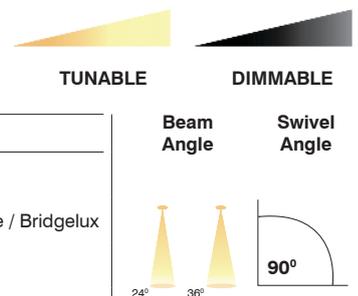


## TRACKSPOT



## STORM

Product Code	CRI	CCT	Dimension (in mm)		Lumen	Driver Opt	System Specs	
SL-STL-266-12w-R-W.WHT	80 / 90	3000K	Diameter	Height	1320 lm	36-42V@300mA	<b>Housing</b>	Aluminium
SL-STL-266-12w-R-N.WHT		4000K	60	122	1440 lm		<b>LED Make</b>	Citizen / Cree / Bridgelux
SL-STL-266-12w-R-WHT		6500K			1500 lm		<b>Driver Brands</b>	Philips / Fulham



## TRACKSPOT




MacAdam 2~4

Available Body Finish : Black / White


## OCEAN

Product Code	Dimension (in mm)		System Specs	
	Diameter	Length	Housing	Aluminium
SL-TL-227-GU10 Base	56	123	<b>LED Make</b>	-
			<b>Driver Brands</b>	-
			<b>Dimming</b>	-

Swivel Angle



# TRACKSPOT

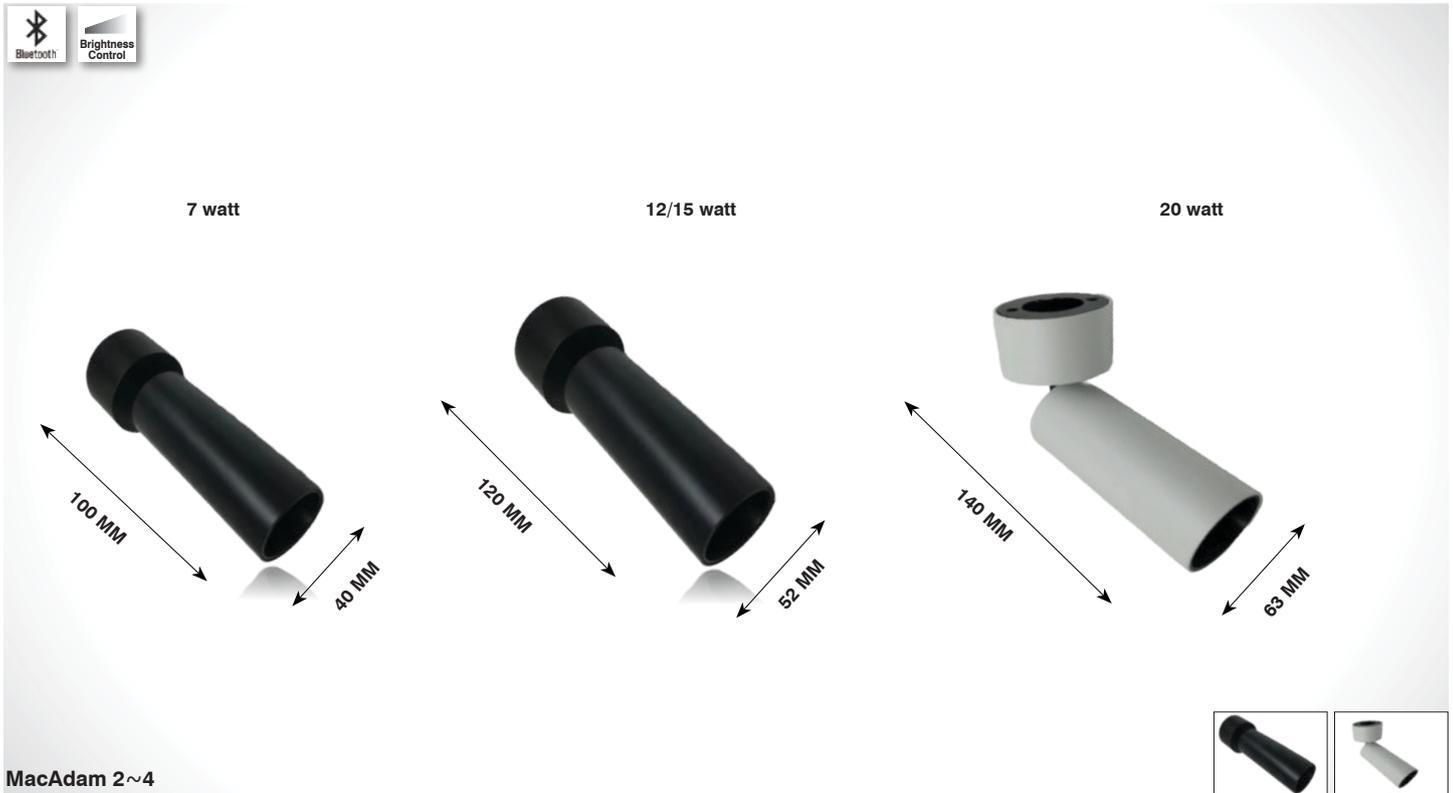


Available Body Finish : Black / White

# DOMINO A




Product Code	CRI	CCT	Dimension (in mm)	Lumen	Driver Opt	System Specs	
SL-STL-342-7w-R-W.WHT	80 / 90	3000K	Diameter	770 lm	36-42V@150mA	<b>Housing</b>	Aluminium
SL-STL-342-7w-R-N.WHT		4000K	40 x 100	840 lm		<b>LED Make</b>	Citizen / Cree / Bridgelux
SL-STL-342-7w-R-WHT		6500K		875 lm		<b>Driver Brands</b>	Srishti
						<b>Dimming</b>	Triac / 0-10v / Dali
SL-STL-342-12/15w-R-W.WHT	80 / 90	3000K	Diameter	1320 lm	36-42V@350mA	<b>Housing</b>	Aluminium
SL-STL-342-12/15w-R-N.WHT		4000K	52 x 120	1440 lm		<b>LED Make</b>	Citizen / Cree / Bridgelux
SL-STL-342-12/15w-R-WHT		6500K		1500 lm		<b>Driver Brands</b>	Srishti
						<b>Dimming</b>	Triac / 0-10v / Dali
SL-STL-342-20w-R-W.WHT	80 / 90	3000K	Diameter	2200 lm	36-42V@500mA	<b>Housing</b>	Aluminium
SL-STL-342-20w-R-N.WHT		4000K	63 x 140	2400 lm		<b>LED Make</b>	Citizen / Cree / Bridgelux
SL-STL-342-20w-R-WHT		6500K		2500 lm		<b>Driver Brands</b>	Srishti
						<b>Dimming</b>	Triac / 0-10v / Dali

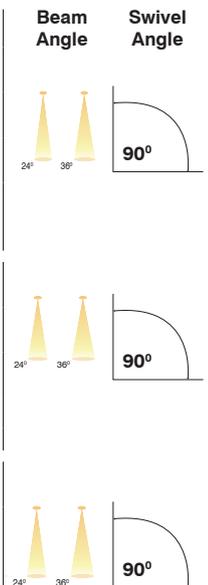

On request also available in CCT - 2700K / 3500K / 5000K

# TRACKSPOT

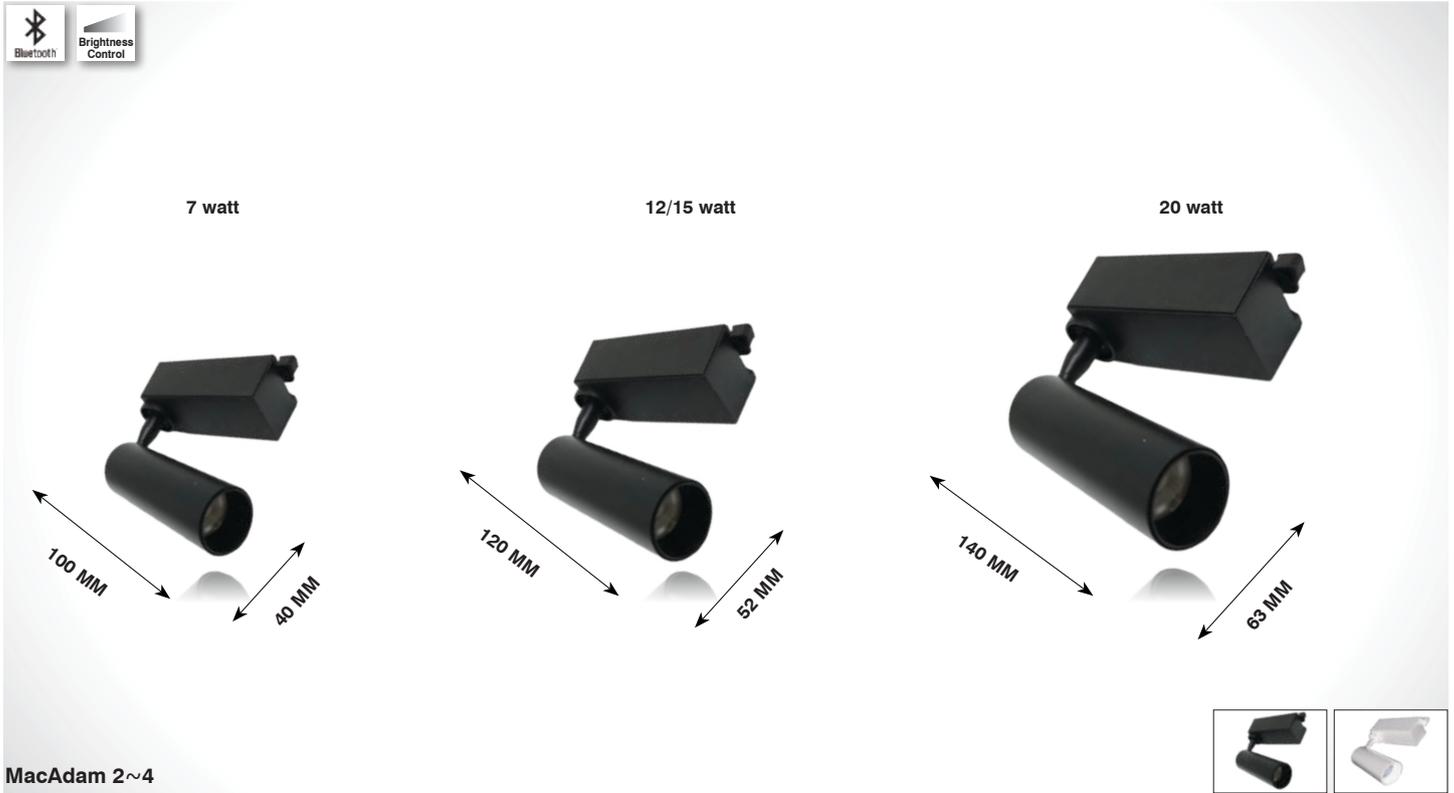


Available Body Finish : Black / White

# DOMINO B




Product Code	CRI	CCT	Dimension (in mm)	Lumen	Driver Opt	System Specs	
SL-TL-343-7w-R-W.WHT	80 / 90	3000K	Diameter	770 lm	36-42V@150mA	<b>Housing</b>	Aluminium
SL-TL-343-7w-R-N.WHT		4000K	40 x 100	840 lm		<b>LED Make</b>	Citizen / Cree / Bridgelux
SL-TL-343-7w-R-WHT		6500K		875 lm		<b>Driver Brands</b>	Philips / Fulham
						<b>Dimming</b>	Triac / 0-10v / Dali
SL-TL-343-12/15w-R-W.WHT	80 / 90	3000K	Diameter	1320 lm	36-42V@350mA	<b>Housing</b>	Aluminium
SL-TL-343-12/15w-R-N.WHT		4000K	52 x 120	1440 lm		<b>LED Make</b>	Citizen / Cree / Bridgelux
SL-TL-343-12/15w-R-N.WHT		6500K		1500 lm		<b>Driver Brands</b>	Philips / Fulham
						<b>Dimming</b>	Triac / 0-10v / Dali
SL-TL-343-20w-R-W.WHT	80 / 90	3000K	Diameter	2200 lm	36-42V@500mA	<b>Housing</b>	Aluminium
SL-TL-343-20w-R-N.WHT		4000K	63 x 140	2400 lm		<b>LED Make</b>	Citizen / Cree / Bridgelux
SL-TL-343-20w-R-WHT		6500K		2500 lm		<b>Driver Brands</b>	Philips / Fulham
						<b>Dimming</b>	Triac / 0-10v / Dali

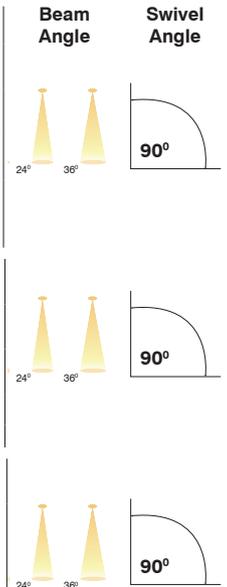

On request also available in CCT - 2700K / 3500K / 5000K

## TRACKSPOT

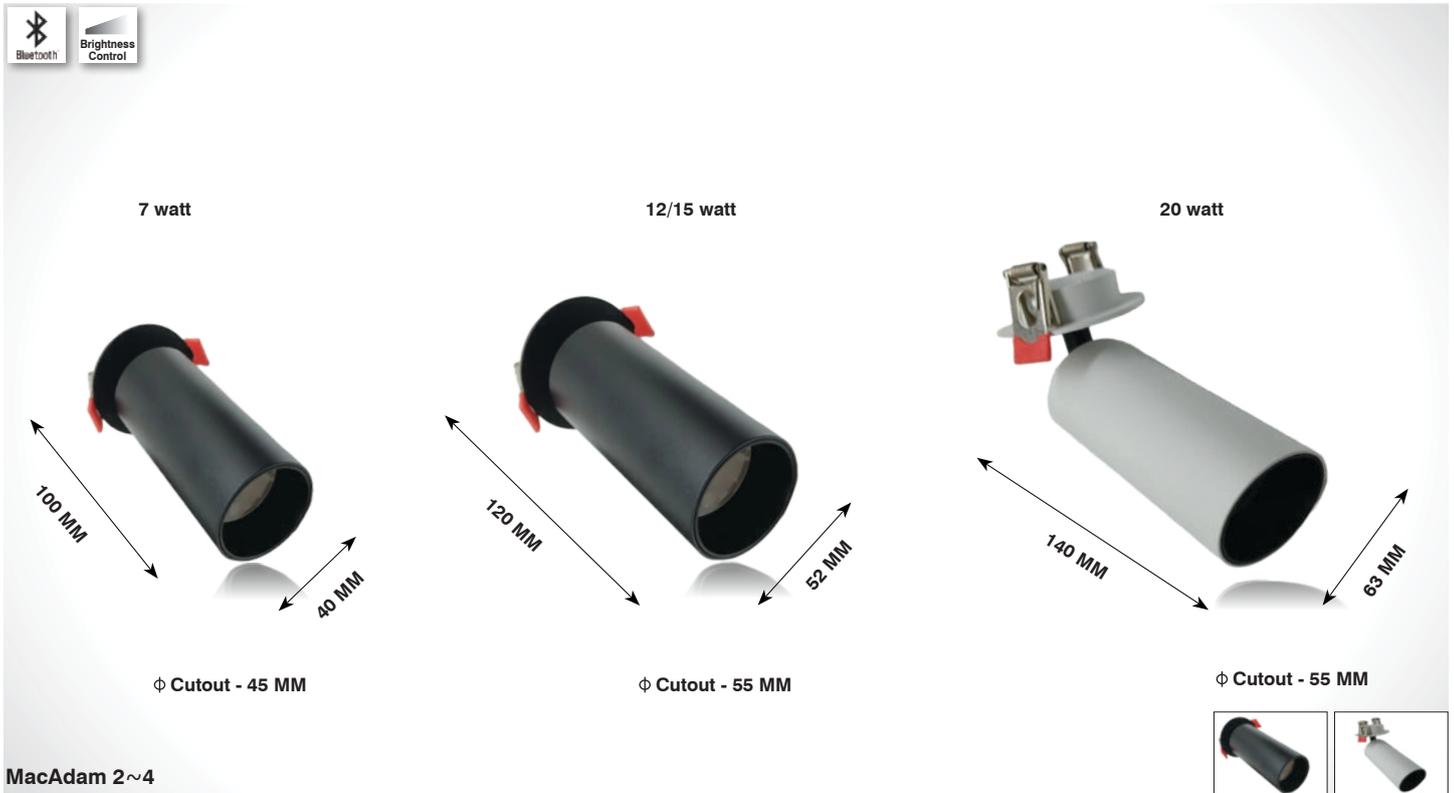


MacAdam 2~4

Available Body Finish : Black / White

## DOMINO C



Product Code	CRI	CCT	Dimension (in mm)	Lumen	Driver Opt	System Specs	
SL-RTL-346-7w-R-W.WHT	80 / 90	3000K	Diameter cutout	770 lm	36-42V@150mA	<b>Housing</b>	Aluminium
SL-RTL-346-7w-R-N.WHT		4000K	40 x 100 45	840 lm		<b>LED Make</b>	Citizen / Cree / Bridgelux
SL-RTL-346-7w-R-WHT		6500K		875 lm		<b>Driver Brands</b>	Philips / Fulham
						<b>Dimming</b>	Triac / 0-10v / Dali
SL-RTL-346-12/15w-R-W.WHT	80 / 90	3000K	Diameter cutout	1320 lm	36-42V@350mA	<b>Housing</b>	Aluminium
SL-RTL-346-12/15w-R-N.WHT		4000K	52 x 120 55	1440 lm		<b>LED Make</b>	Citizen / Cree / Bridgelux
SL-RTL-346-12/15w-R-WHT		6500K		1500 lm		<b>Driver Brands</b>	Philips / Fulham
						<b>Dimming</b>	Triac / 0-10v / Dali
SL-RTL-346-20w-R-W.WHT	80 / 90	3000K	Diameter cutout	2200 lm	36-42V@500mA	<b>Housing</b>	Aluminium
SL-RTL-346-20w-R-N.WHT		4000K	63 x 140 55	2400 lm		<b>LED Make</b>	Citizen / Cree / Bridgelux
SL-RTL-346-20w-R-WHT		6500K		2500 lm		<b>Driver Brands</b>	Philips / Fulham
						<b>Dimming</b>	Triac / 0-10v / Dali

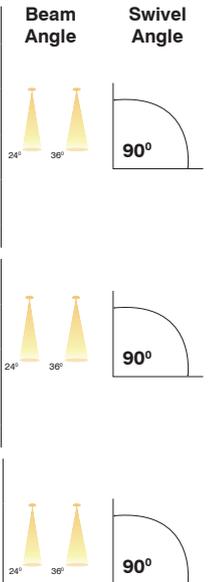

On request also available in CCT - 2700K / 3500K / 5000K

## TRACKSPOT




## CASPER

Available Body Finish : Black / White




Product Code	CRI	CCT	Dimension (in mm)	Lumen	Driver Opt	System Specs	
SL-TL-369-30w-R-W.WHT	80 / 90	3000K	Diameter	3300 lm	36-42V@750mA	<b>Housing</b>	Aluminium
SL-TL-369-30w-R-N.WHT		4000K	80 x 120	3600 lm		<b>LED Make</b>	Citizen / Cree / Bridgelux
SL-TL-369-30w-R-WHT		6500K		3750 lm		<b>Driver Brands</b>	Philips / Fulham
						<b>Dimming</b>	Triac / 0-10v / Dali
SL-TL-369-35w-R-W.WHT	80 / 90	3000K	Diameter	3850 lm	36-42V@850mA	<b>Housing</b>	Aluminium
SL-TL-369-35w-R-N.WHT		4000K	80 x 120	4200 lm		<b>LED Make</b>	Citizen / Cree / Bridgelux
SL-TL-369-35w-R-WHT		6500K		4375 lm		<b>Driver Brands</b>	Philips / Fulham
						<b>Dimming</b>	Triac / 0-10v / Dali

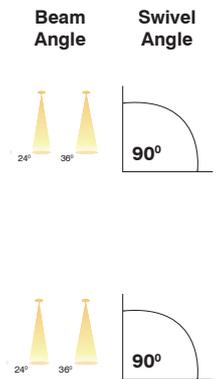

# TRACKSPOT

**NEW**

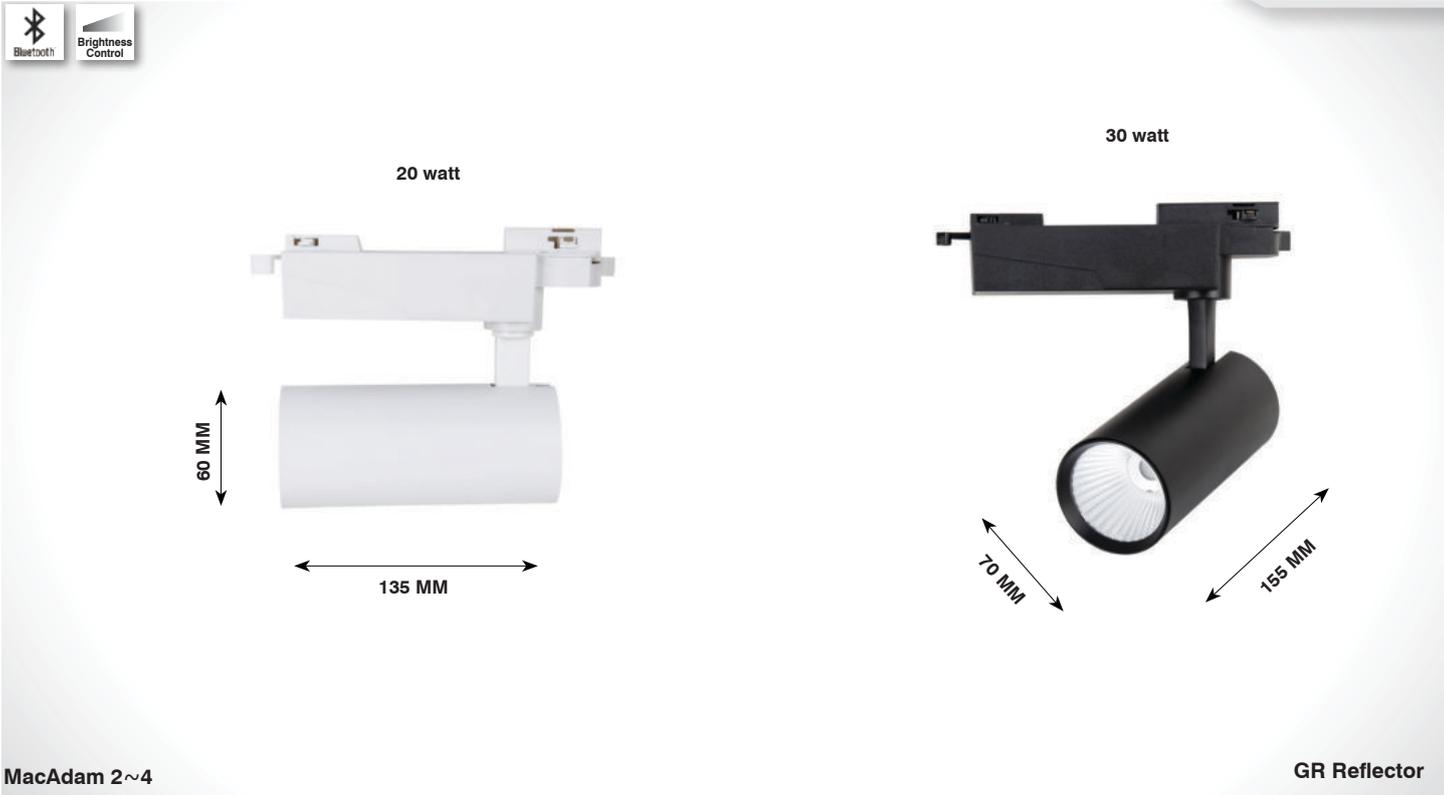


Available Body Finish : Black / White

# LUKE



Product Code	CRI	CCT	Dimension (in mm)		Lumen	Driver Opt	System Specs	
			Diameter	Length			Housing	LED Make
SL-TL-384-20w-R-W.WHT	80 / 90	3000K			2200 lm	36-42V@610mA	Aluminium	
SL-TL-384-20w-R-N.WHT		4000K	60	135	2400 lm		Citizen / Cree / Bridgelux	
SL-TL-384-20w-R-WHT		6500K			2500 lm		Philips / Fulham	
							Triac / 0-10v / Dali	
SL-TL-384-30w-R-W.WHT	80 / 90	3000K			3300 lm	36-42V@750mA	Aluminium	
SL-TL-384-30w-R-N.WHT		4000K	70	155	3600 lm		Citizen / Cree / Bridgelux	
SL-TL-384-30w-R-WHT		6500K			3750 lm		Philips / Fulham	
							Triac / 0-10v / Dali	

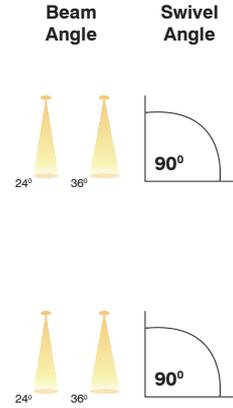

SPOT LIGHT SERIES



## SPOT LIGHT



## SPYRO

Product Code	CRI	CCT	Dimension (in mm)			Lumen	Driver Opt	System Specs	
SL-SP-198-4w-R-W.WHT	80 / 90	3000K	Diameter	Height	Cutout	440 lm	3-3.6V@700mA	<b>Housing</b>	Aluminium
SL-SP-198-4w-R-N.WHT		4000K	35	37.5	∅ 30	480 lm		<b>LED Make</b>	Cree
SL-SP-198-4w-R-WHT		6500K				500 lm		<b>Driver Brands</b>	Srishti
								<b>Dimming</b>	Triac / 0-10v / Dali


Beam Angle




### Application



## SPOT LIGHT

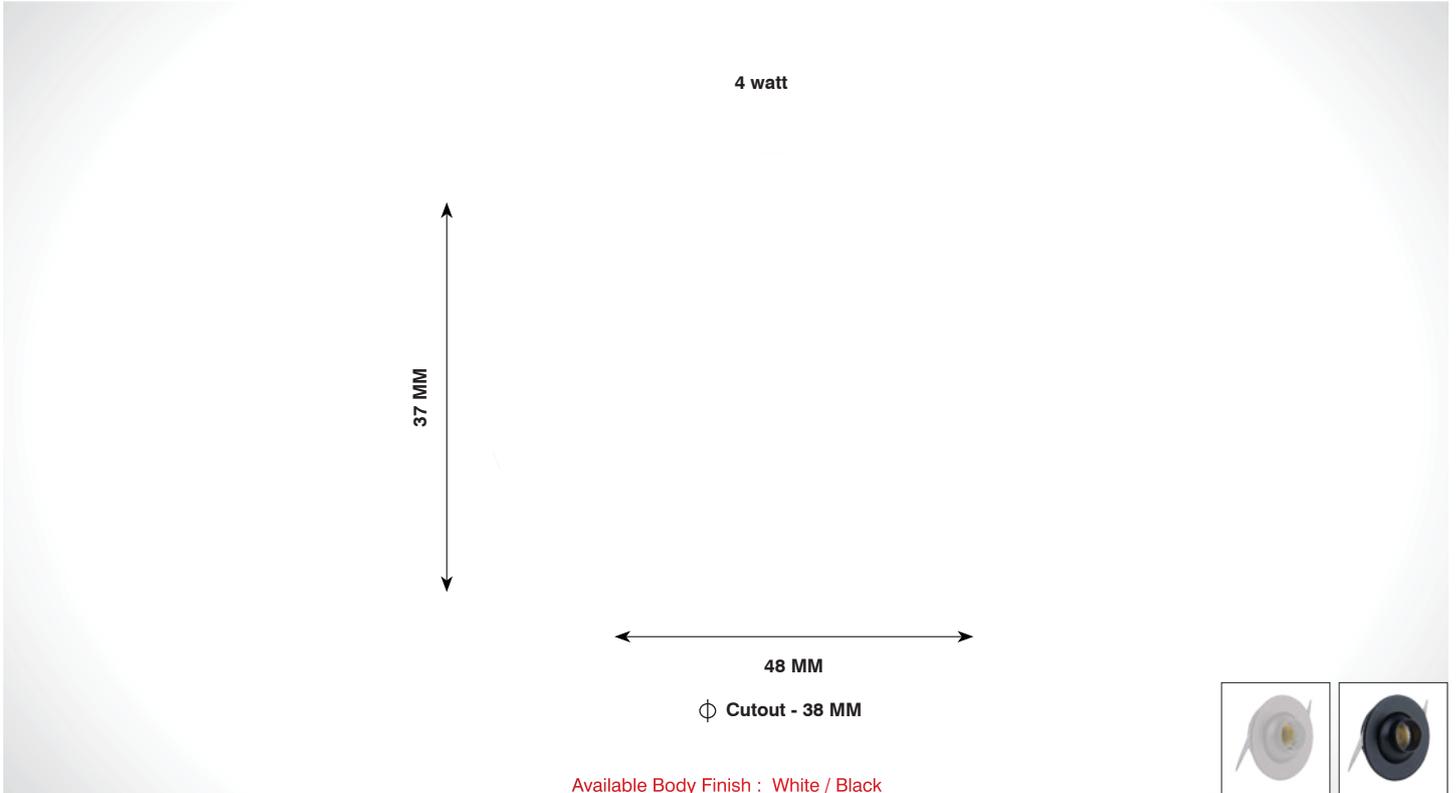


Available Body Finish : White / Black



TILTABLE

## STELIOS


Product Code	CRI	CCT	Dimension (in mm)			Lumen	Driver Opt	System Specs	
			Diameter	Height	Cutout			Housing	Aluminium
SL-SP-252-4w-R-W.WHT	80 / 90	3000K				440 lm	3-3.6V@700mA	<b>LED Make</b>	Cree
SL-SP-252-4w-R-N.WHT		4000K	48	37	φ38	480 lm		<b>Driver Brands</b>	Srishti
SL-SP-252-4w-R-WHT		6500K				500 lm		<b>Dimming</b>	Triac / 0-10v / Dali



### Application




## SPOT LIGHT

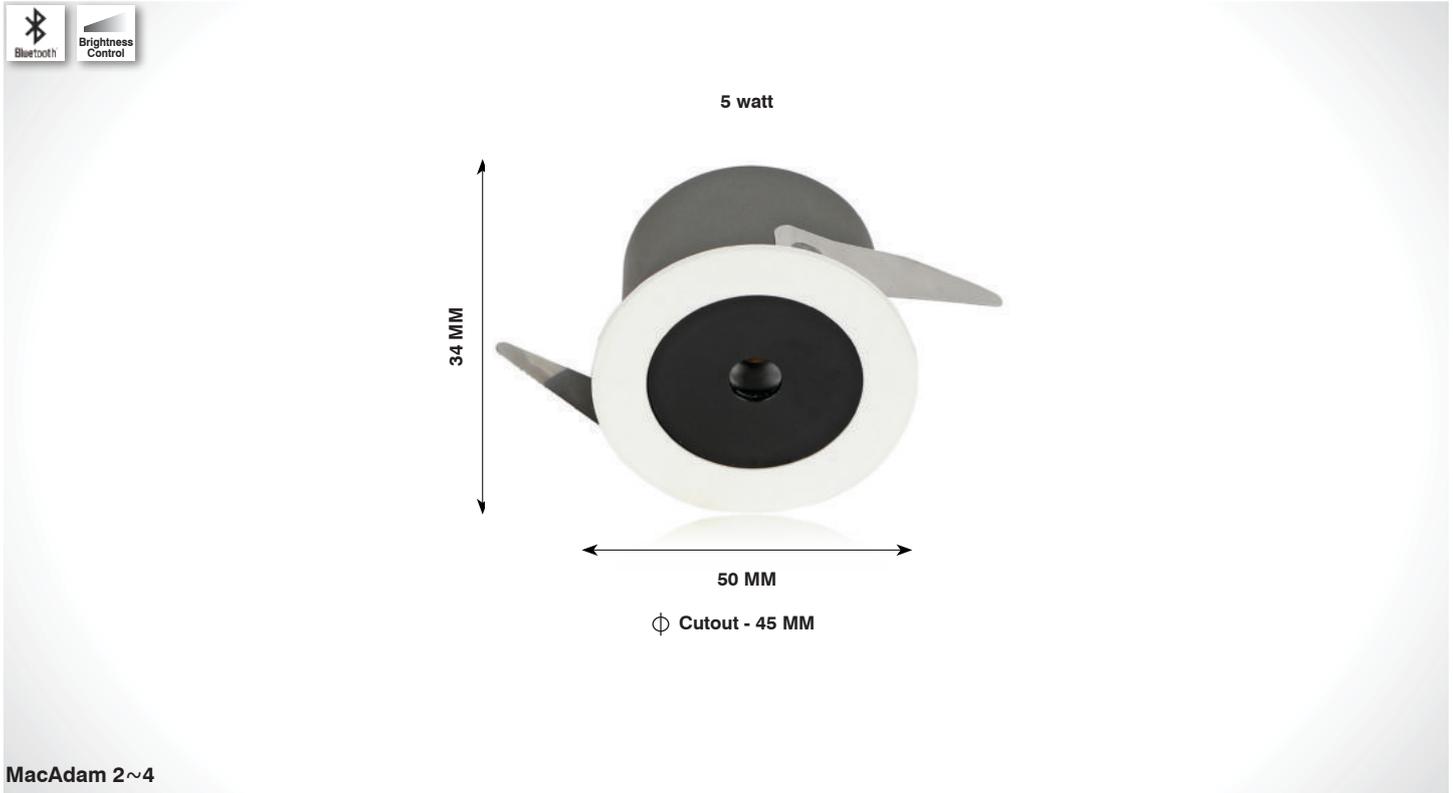

## SAGE

Product Code	CRI	CCT	Dimension (in mm)			Lumen	Driver Opt	System Specs	
			Diameter	Height	Cutout			Housing	LED Make
SL-SP-258-5w-R-W.WHT	80 / 90	3000K				550 lm	3-3.6VDC@700mA	Aluminium	
SL-SP-258-5w-R-N.WHT		4000K	50	34	∅ 45	600 lm		Cree	
SL-SP-258-5w-R-WHT		6500K				625 lm		Srishti	
								Triac / 0-10v / Dali	

### Beam Angle



### Application



## SPOT LIGHT




## ESPEN

### Wall Washer

Product Code	CRI	CCT	Dimension (in mm)			Lumen	Driver Opt	System Specs	
			Diameter	Depth	Cutout			Housing	LED Make
SL-SP-268-2w-R-W.WHT	80 / 90	3000K				220 lm	3-3.6VDC@350mA	Aluminium	
SL-SP-268-2w-R-N.WHT		4000K	34	15	⌀ 27	240 lm		Osram	
SL-SP-268-2w-R-WHT		6500K				250 lm		Srishti	


#### Beam Angle



#### Application




## SPOT LIGHT

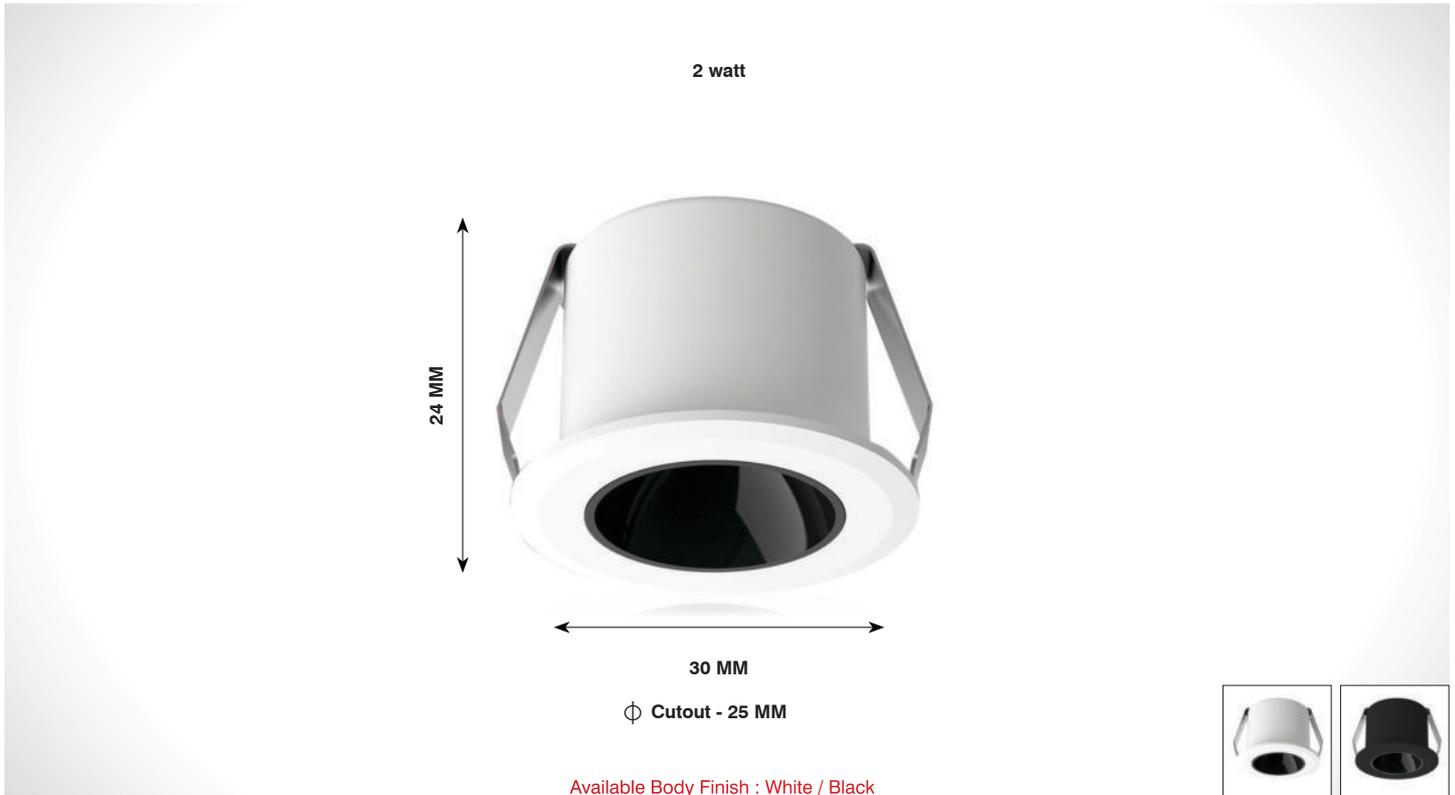

## KWID

Product Code	CRI	CCT	Dimension (in mm)			Lumen	Driver Opt	System Specs	
			Diameter	Height	Cutout			Housing	LED Make
SL-SP-305-2w-R-W.WHT	80 / 90	3000K				220 lm	3-14V@300mA	Aluminium	
SL-SP-305-2w-R-N.WHT		4000K	30	24	∅ 25	240 lm		Osram	
SL-SP-305-2w-R-WHT		6500K				250 lm		Srishti	

### Beam Angle



### Application




## SPOT LIGHT



## TRIBER

Product Code	CRI	CCT	Dimension (in mm)			Lumen	Driver Opt	System Specs	
			Diameter	Height	Cutout			Housing	Aluminium
SL-SP-306-3w-R-W.WHT	80 / 90	3000K	40	31	∅ 35	330 lm	2-5V@600mA	<b>LED Make</b>	Osram
SL-SP-306-3w-R-N.WHT		4000K				360 lm		<b>Driver Brands</b>	Srishti
SL-SP-306-3w-R-WHT		6500K				375 lm			


### Beam Angle



### Application




## SPOT LIGHT

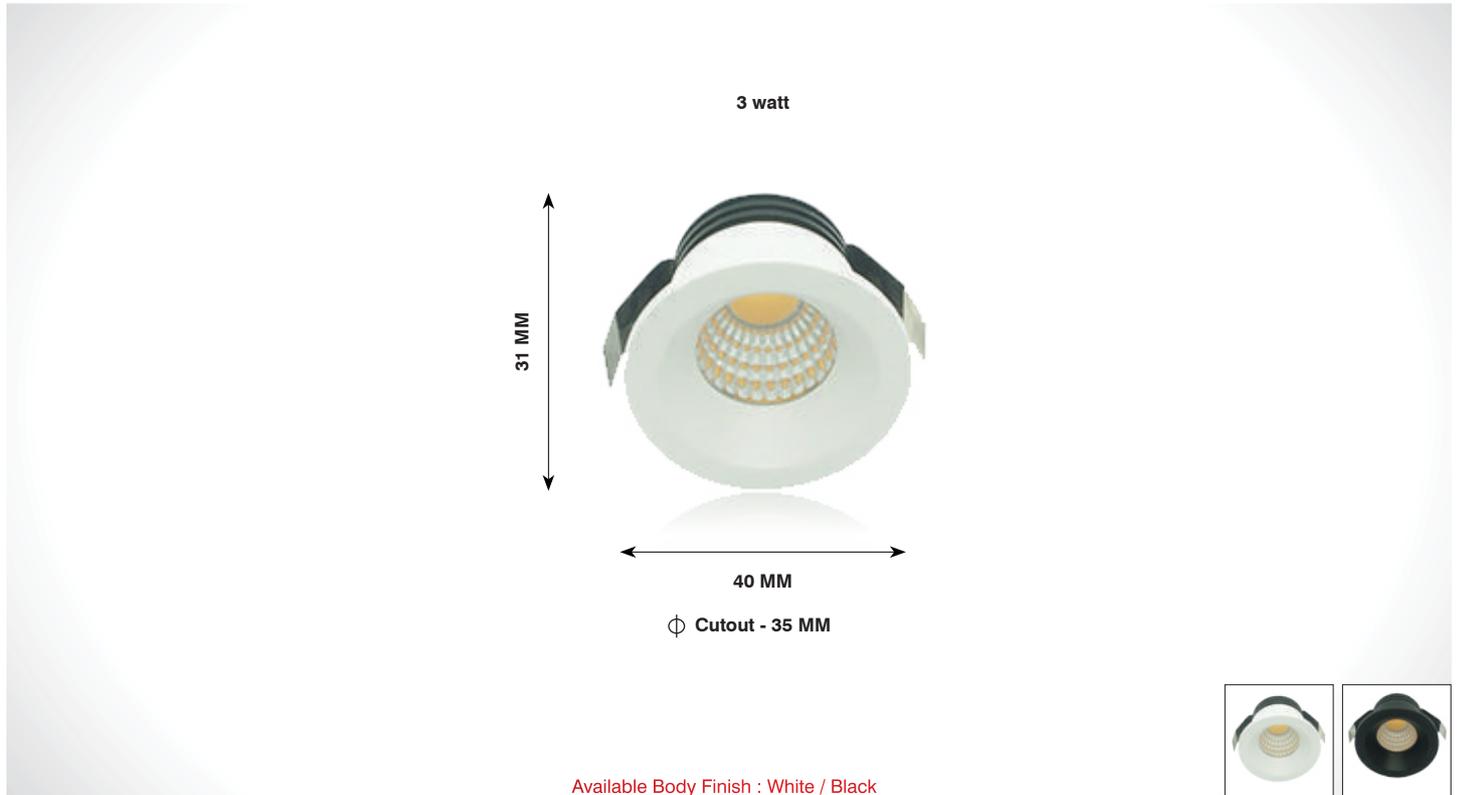

## BLITZ

Product Code	CRI	CCT	Dimension (in mm)			Lumen	Driver Opt	System Specs	
			Diameter	Height	Cutout			Housing	LED Make
SL-SP-307-3w-R-W.WHT	80	3000K				330 lm	2-5V@600mA	Aluminium	
SL-SP-307-3w-R-N.WHT		4000K	38	30	∅ 36	360 lm		Epistar	
SL-SP-307-3w-R-WHT		6500K				375 lm		Srishti	

### Beam Angle



### Application



## SPOT LIGHT




Available Body Finish : White / Black

## AMMO


Product Code	CRI	CCT	Dimension (in mm)			Lumen	Driver Opt	System Specs	
SL-DL-336-3w-R-W-WHT	80 / 90	3000K	Diameter	Height	Cutout	330 lm	2-5V@600mA	<b>Housing</b>	Aluminium
SL-DL-336-3w-R-N-WHT		4000K	22	38	16	360 lm		<b>LED Make</b>	Osram
SL-DL-336-3w-R-WHT		6500K				375 lm		<b>Driver Brands</b>	Srishti

### Beam Angle




## CAMO

Product Code	CRI	CCT	Dimension (in mm)			Lumen	Driver Opt	System Specs	
SL-DL-337-3w-R-W-WHT	80 / 90	3000K	Diameter	Height	Cutout	330 lm	2-5V@600mA	<b>Housing</b>	Aluminium
SL-DL-337-3w-R-N-WHT		4000K	12	60	15	360 lm		<b>LED Make</b>	Osram
SL-DL-337-3w-R-WHT		6500K				375 lm		<b>Driver Brands</b>	Srishti



TILTABLE

### Beam Angle




### Swivel Angle



### Application



## SPOT LIGHT

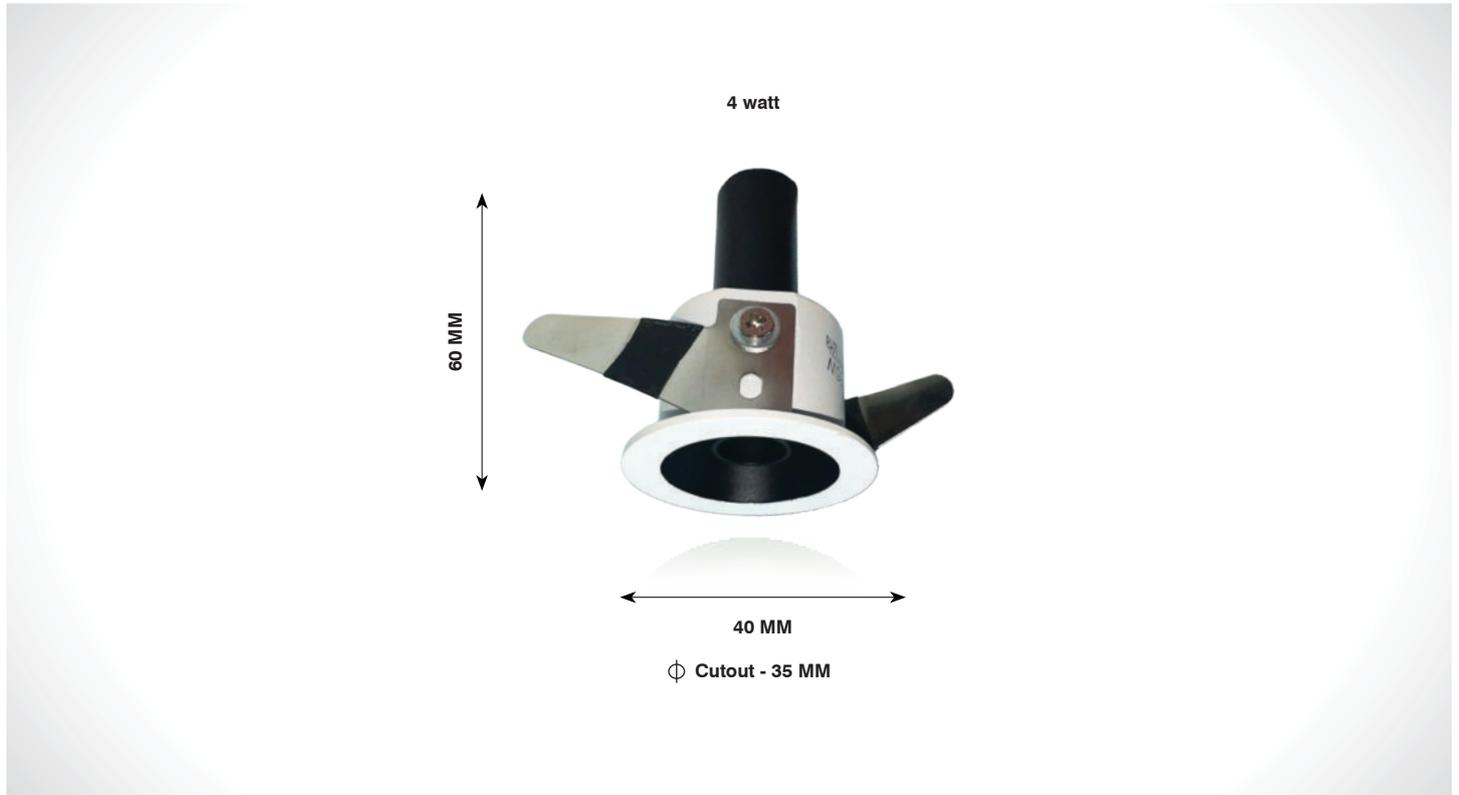


## URUS



TILTABLE


Product Code	CRI	CCT	Dimension (in mm)			Lumen	Driver Opt	System Specs	
			Diameter	Height	Cutout			Housing	Aluminium
SL-SP-339-4w-R-W.WHT	80	3000K				440 lm	180-260V@700mA		
SL-SP-339-4w-R-N.WHT		4000K	40	60	∅ 35	480 lm		<b>LED Make</b>	Epistar
SL-SP-339-4w-R-WHT		6500K				500 lm		<b>Driver Brands</b>	Srishti



### Application




## SPOT LIGHT

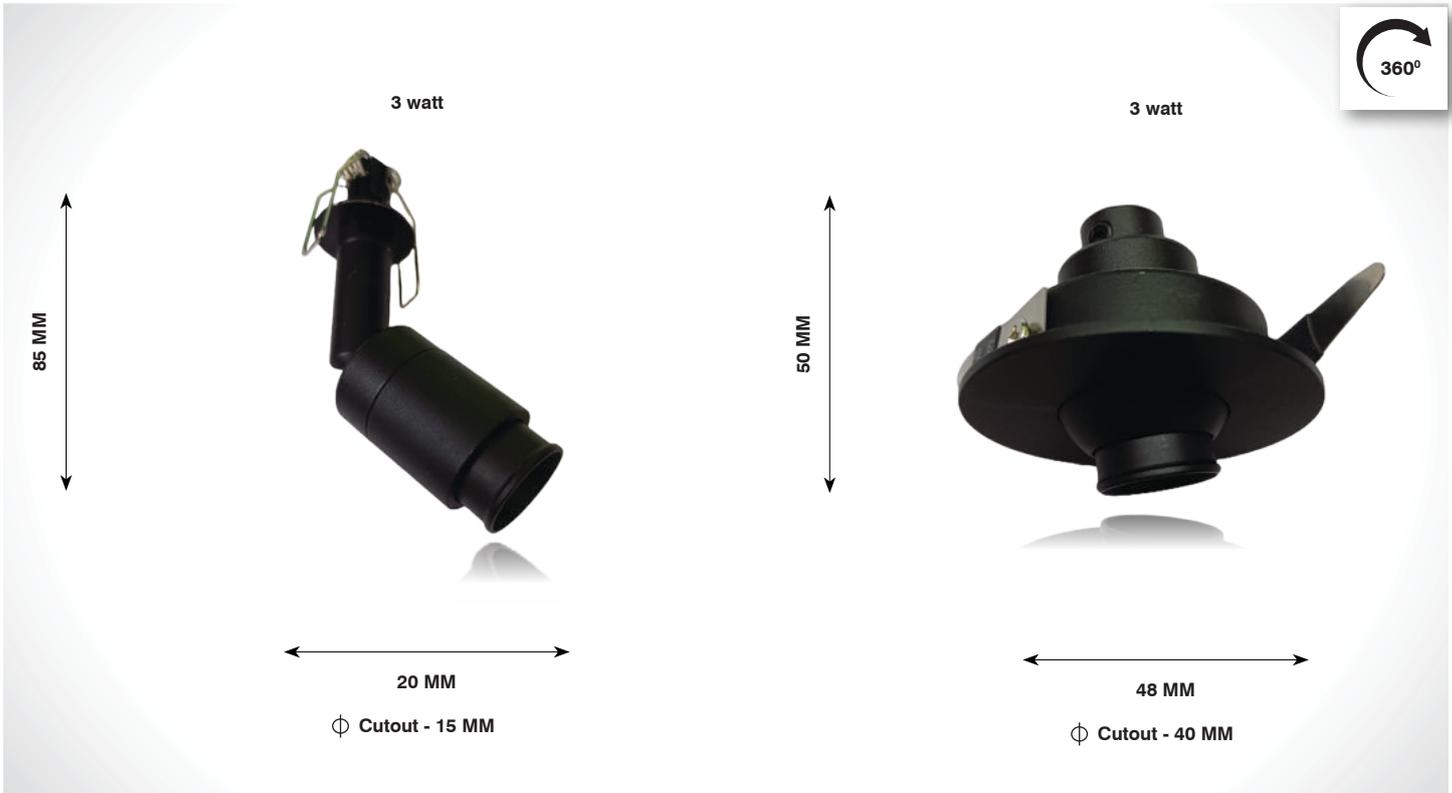

Available Body Finish : White / Black


## EDNA

Product Code	CRI	CCT	Dimension (in mm)			Lumen	Driver Opt	System Specs	
			Diameter	Height	Cutout			Housing	Aluminium
SL-SP-360-3w-R-W.WHT	80	3000K	20	85	φ 15	330 lm	2-5V@600mA	LED Make	Cree / Osram
SL-SP-360-3w-R-N.WHT		4000K				360 lm		Driver Brands	Srishti
SL-SP-360-3w-R-WHT		6500K				375 lm			



## ELVIRA


Product Code	CRI	CCT	Dimension (in mm)			Lumen	Driver Opt	System Specs	
			Diameter	Height	Cutout			Housing	Aluminium
SL-SP-361-3w-R-W.WHT	80	3000K	48	50	φ 40	330 lm	2-5V@600mA	LED Make	Cree / Osram
SL-SP-361-3w-R-N.WHT		4000K				360 lm		Driver Brands	Srishti
SL-SP-361-3w-R-WHT		6500K				375 lm			



### Application




# SPOT LIGHT

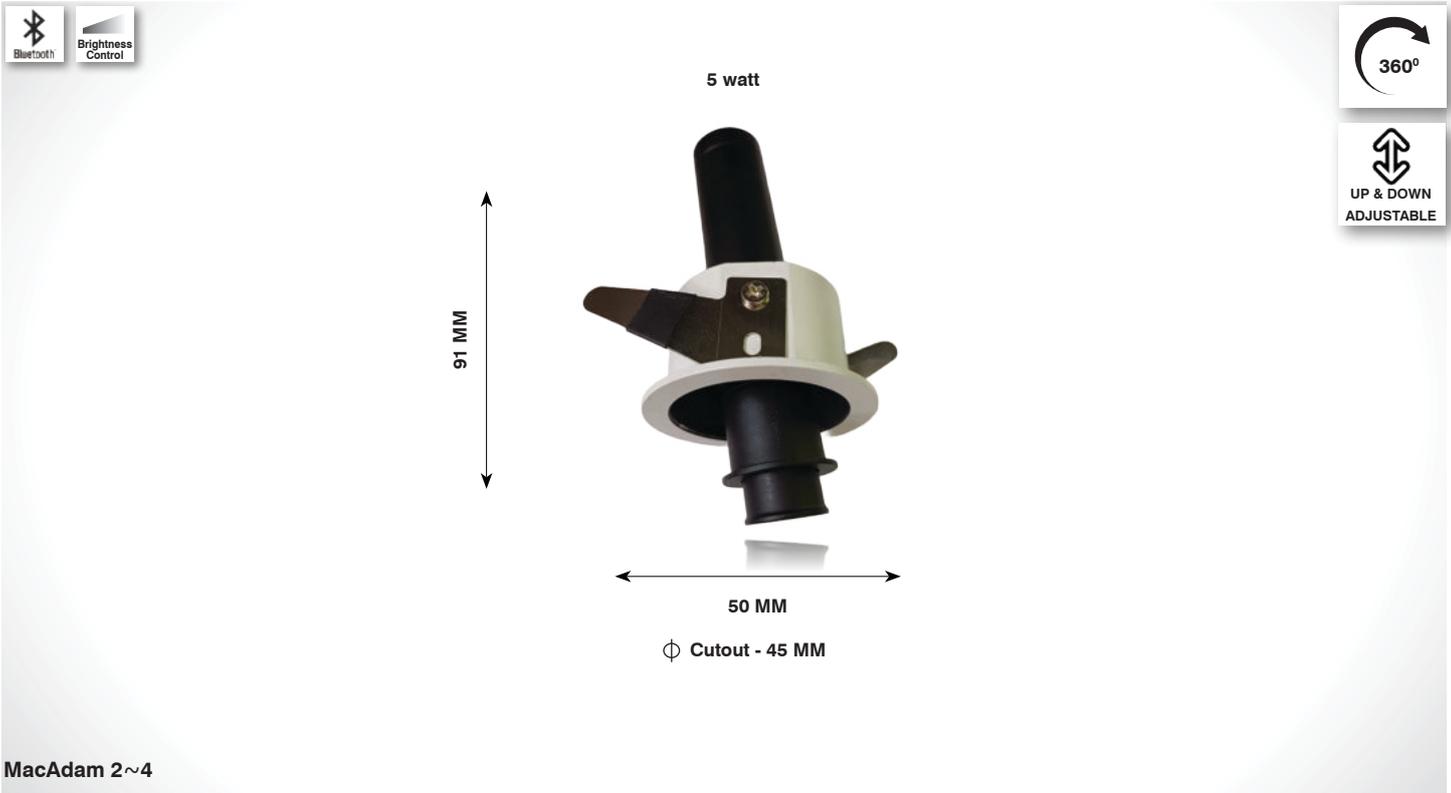

# Z E U S



Product Code	CRI	CCT	Dimension (in mm)			Lumen	Driver Opt	System Specs	
			Diameter	Height	Cutout			Housing	Aluminium
SL-SP-362-5w-R-W.WHT	80	3000K				550 lm	180-260V@700mA		
SL-SP-362-5w-R-N.WHT		4000K	50	91	∅ 45	600 lm		<b>LED Make</b>	Cree / Osram
SL-SP-362-5w-R-WHT		6500K				625 lm		<b>Driver Brands</b>	Srishti



**Application**



# SPOT LIGHT



MacAdam 2~4

Available Body Finish : Rose Gold / Gun Metal / Chrome / Black / White


## LEIA

Product Code	CRI	CCT	Dimension (in mm)			Lumen	Driver Opt	System Specs	
SL-SP-363-3w-R-W.WHT	80	3000K	Diameter	Height	Cutout	330 lm	2-5V@600mA	<b>Housing</b>	Aluminium
SL-SP-363-3w-R-N.WHT		4000K	24	65	φ 18	360 lm		<b>LED Make</b>	Cree / Osram
SL-SP-363-3w-R-WHT		6500K				375 lm		<b>Driver Brands</b>	Srishti


  

Product Code	CRI	CCT	Dimension (in mm)			Lumen	Driver Opt	System Specs	
SL-SP-364-7w-R-W.WHT	80	3000K	Diameter	Height	Cutout	770 lm	36-42V@150mA	<b>Housing</b>	Aluminium
SL-SP-364-7w-R-N.WHT		4000K	30	65	φ 22	840 lm		<b>LED Make</b>	Cree / Osram
SL-SP-364-7w-R-WHT		6500K				875 lm		<b>Driver Brands</b>	Philips

### Beam Angle



### Beam Angle



### Application






CABINET LIGHT SERIES



## CABINET LIGHT

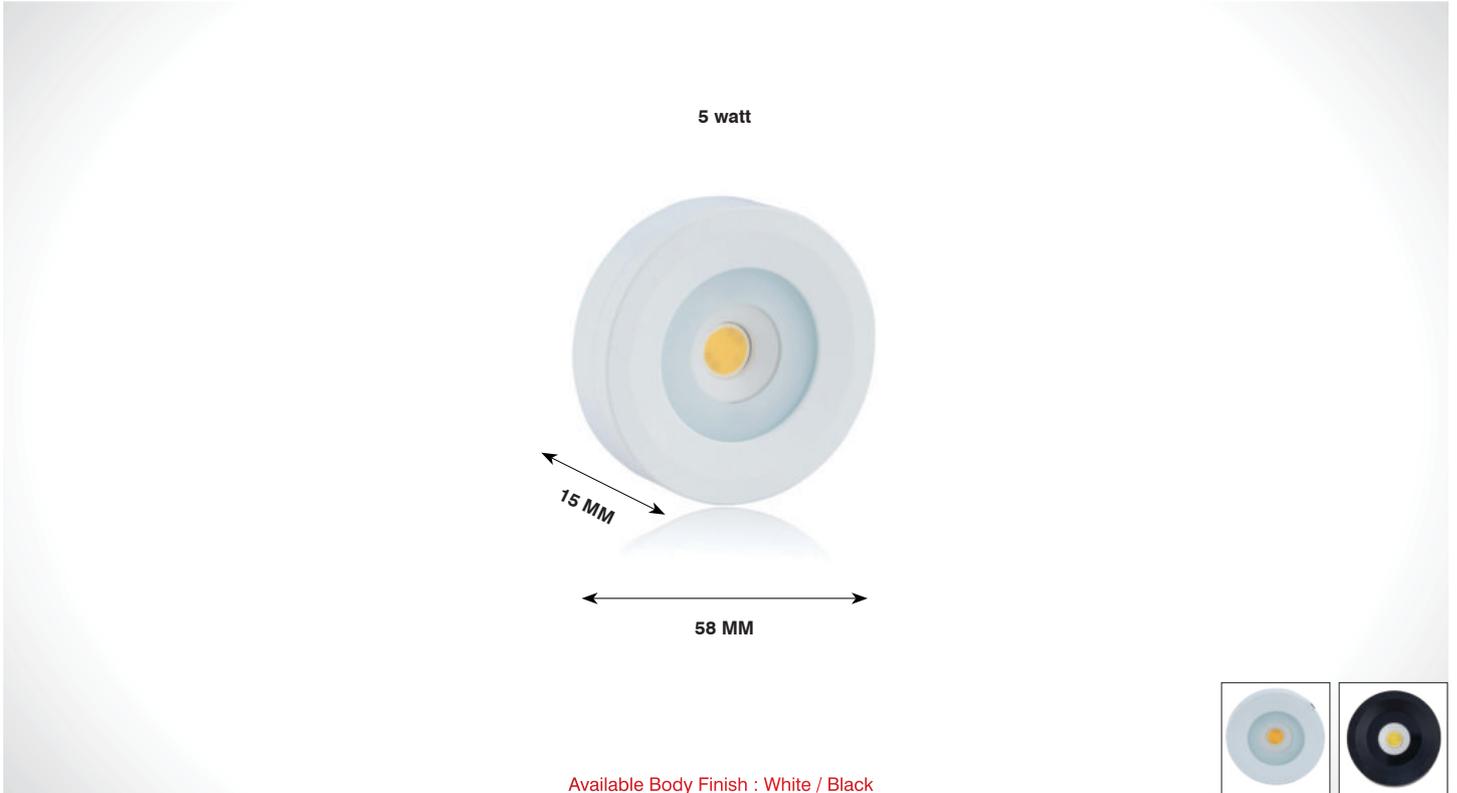


Available Body Finish : White / Black

## BEAT

( IP54 )


Product Code	CRI	CCT	Dimension (in mm)		Lumen	Driver Opt	System Specs	
			Diameter	Height			Housing	LED Make
SL-SCB-253-3w-R-W.WHT	80 / 90	3000K			330 lm	Inbuilt	Aluminium	
SL-SCB-253-3w-R-N.WHT		4000K	58	15	360 lm		Cree	
SL-SCB-253-3w-R-WHT		6500K			375 lm		Inbuilt	
SL-SCB-253-5w-R-W.WHT	80 / 90	3000K			550 lm	Inbuilt	Aluminium	
SL-SCB-253-5w-R-N.WHT		4000K	58	15	600 lm		Cree	
SL-SCB-253-5w-R-WHT		6500K			625 lm		Inbuilt	

Beam Angle



120°

Beam Angle



120°

Application



STRIP LIGHT SERIES



## STRIP LIGHT




( IP20 )

Product Code	Description (per meter)	Volt	Colour Temperature	Dimension	Wattage (per mtr.)	Input Voltage	Lumes
SL-ST-158-5w-IP20	2835-60 led 5W per mtr	12V	Wht / N-Wht / W-Wht	10mm x 5mtrs	5w	12V	24-26
SL-ST-194-12w-IP20	2835-120 Led 12w per mtr	12V	Wht / N-Wht / W-Wht	8mm x 5mtrs	12w	12V	28-30
SL-ST-195-16w-IP20	2835-180 Led 16w per mtr	12V	Wht / N-Wht / W-Wht	10mm x 5mtrs	16w	12V	28-30
SL-ST-196-22w-IP20	2835-240 Led 22w per mtr	12V	Wht / N-Wht / W-Wht	10mm x 5mtrs	22w	12V	28-30
SL-ST-251-12w-IP20	2835-120 Led 12w per mtr	12V	Wht / N-Wht / W-Wht	5mm x 5mtrs	12w	12V	24-26
SL-ST-255-12w-IP20-E	2835-120 Led 12w per mtr	12V	Wht / N-Wht / W-Wht	8mm x 5mtrs	12w	12V	24-26
SL-ST-11-15w-RGB-IP20	5050-60 Led 15w per mtr	12V	RGB	10mm x 5mtrs	15w	12V	-----
SL-ST-233-12w-Tunable-IP20	12V-2835-120 Led 12w-per mtr	12V	CCT Tunable	10mm x 5mtrs	12w	12V	28-30
SL-ST-234-16w-Tunable-IP20	12V-2835-168 Led 16w-per mtr	12V	CCT Tunable	10mm x 5mtrs	16w	12V	28-30
SL-ST-311-12w	24V-2835-120 Led 12w-per mtr (24 VDC)	24V	Wht / N-Wht / W-Wht	8mm x 5mtrs	12w	24V	28-30
SL-ST-313-16w	24V-2835-168 Led 16w-per mtr (24 VDC)	24V	Wht / N-Wht / W-Wht	10mm x 5mtrs	16w	24V	28-30
SL-ST-312-22w	24V-2835-240 Led 22w-per mtr (24 VDC)	24V	Wht / N-Wht / W-Wht	10mm x 5mtrs	22w	24V	28-30

FOOT LIGHT SERIES



## FOOT LIGHT

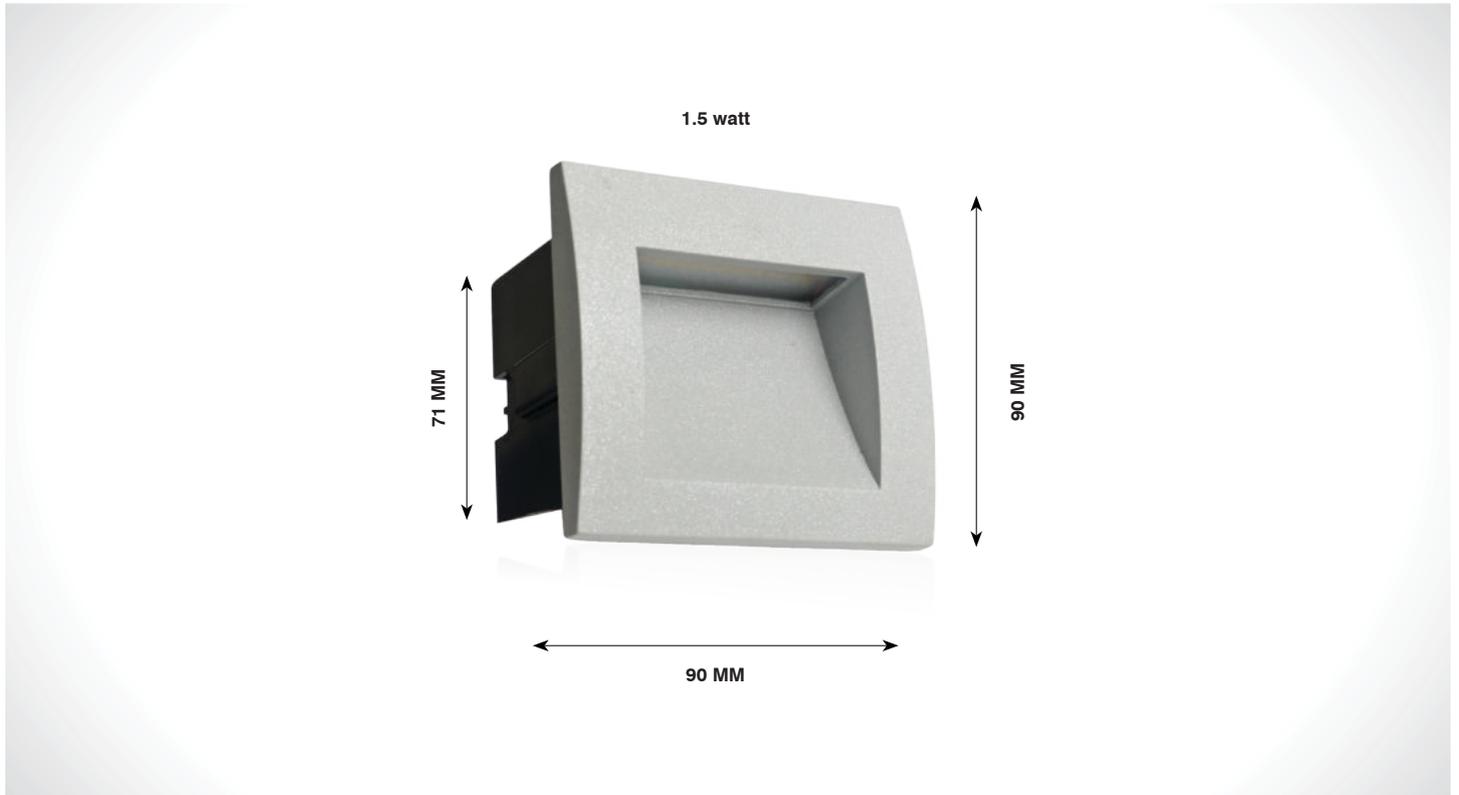

## GLORY

( IP65 )

Product Code	CRI	CCT	Dimension (in mm)		Driver Opt	System Specs	
SL-FT-31-S-I-1.5w-W.WHT	80	3000K	Diameter	Depth	Inbuilt	<b>Housing</b>	Aluminium
			90 x 90	71		<b>LED Make</b>	Edison
						<b>Driver Brands</b>	Srishti

### Application



## FOOT LIGHT



## DINAZ


( IP65 )

Product Code	CRI	CCT	Dimension (in mm)		Driver Opt	System Specs	
SL-FT-32-I-3w-W.WHT	80	3000K	Diameter	Depth	Inbuilt	<b>Housing</b>	Aluminium
			140 x 70	71		<b>LED Make</b>	Edison
						<b>Driver Brands</b>	Srishti

### Application



## FOOT LIGHT

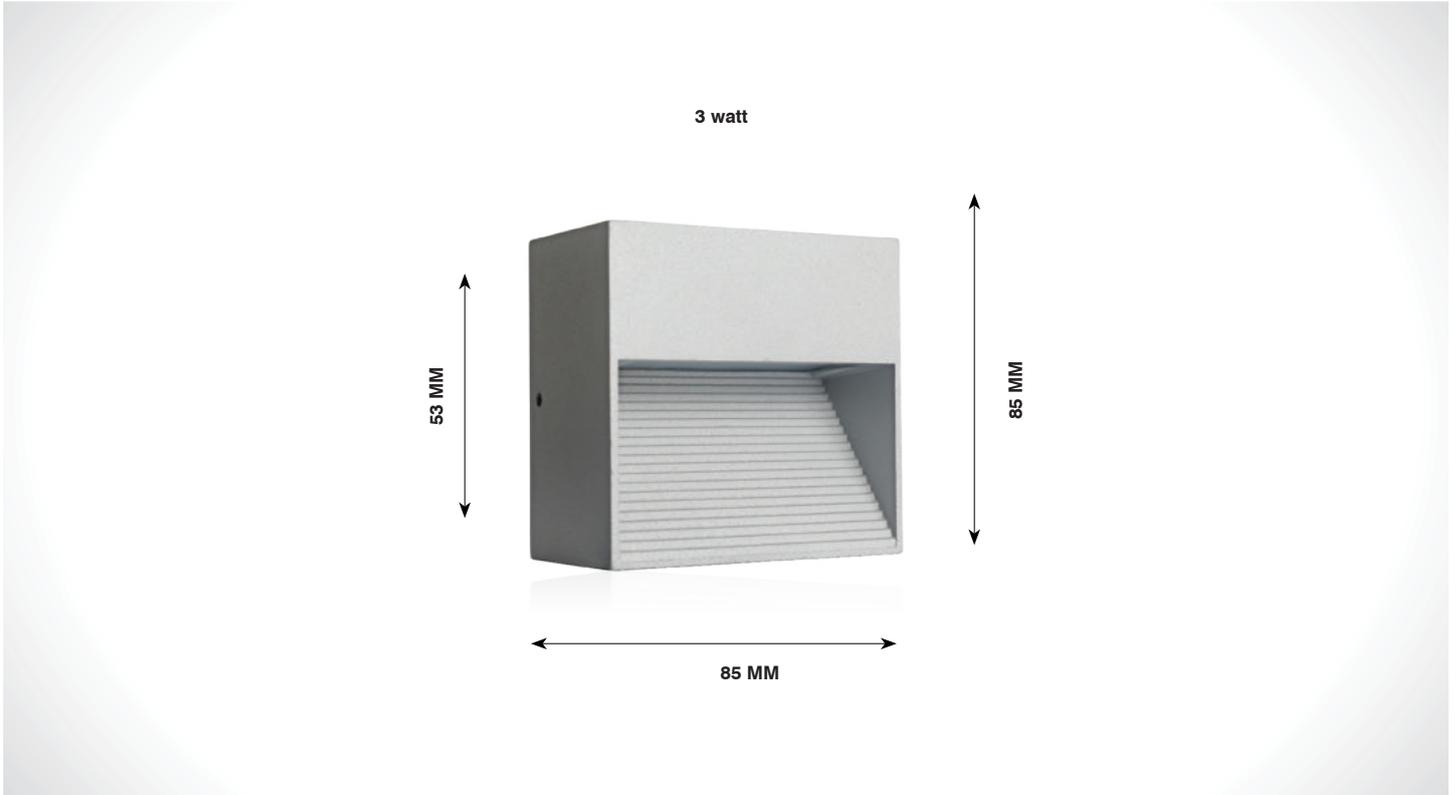

## BOSTAN


( IP65 )

Product Code	CRI	CCT	Dimension (in mm)		Driver Opt	System Specs	
SL-FT-33-I-3w-W.WHT	80	3000K	Diameter	Depth	Inbuilt	<b>Housing</b>	Aluminium
			85 x 85	53		<b>LED Make</b>	Edison
						<b>Driver Brands</b>	Srishti

### Application



## FOOT LIGHT

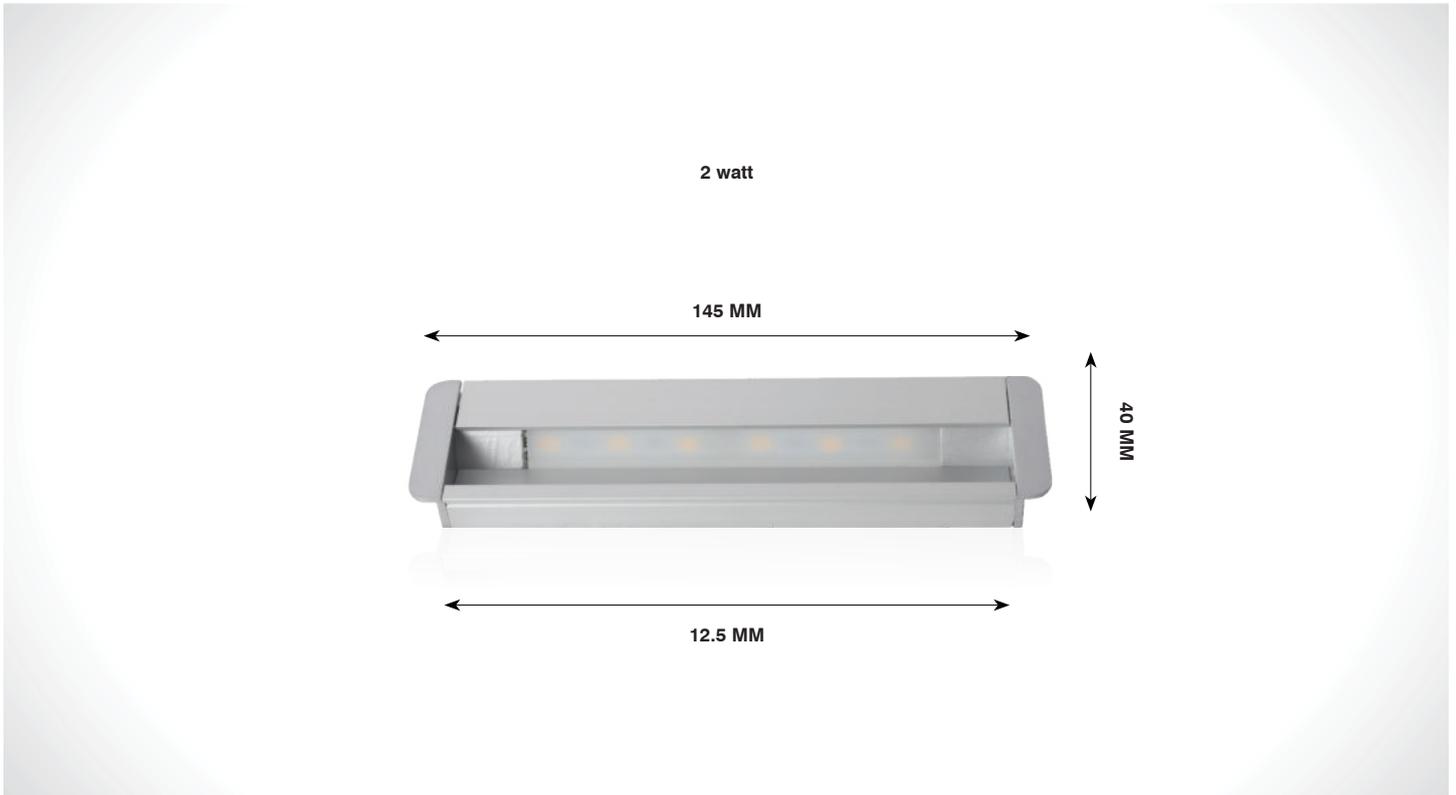

## AVERY


( IP20 )

Product Code	CRI	CCT	Dimension (in mm)		Driver Opt	System Specs	
SL-FT-63-I-2w-W.WHT	80	3000K	Diameter	Depth	Inbuilt	<b>Housing</b>	Aluminium
			145 x 40	12.5		<b>LED Make</b>	Edison
						<b>Driver Brands</b>	Srishti

### Application



## FOOT LIGHT

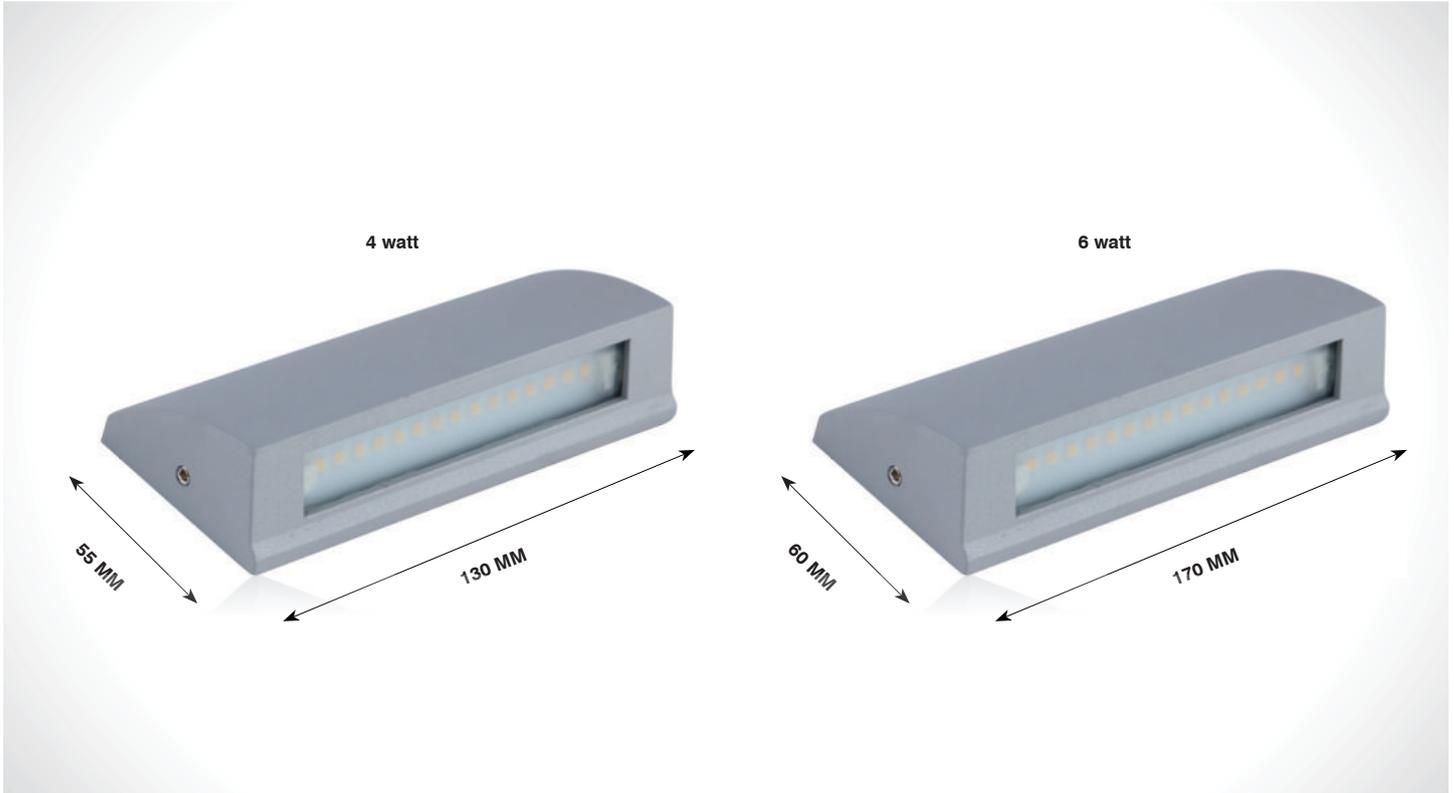

## OLIVIA


( IP65 )

Product Code	CRI	CCT	Dimension (in mm)		Driver Opt	System Specs	
SL-FT-140-4w-W.WHT	80	3000K	Diameter	Height	Inbuilt	<b>Housing</b>	Aluminium
			130	55		<b>LED Make</b>	Edison
						<b>Driver Brands</b>	Srishti
Product Code	CRI	CCT	Dimension (in mm)		Driver Opt	System Specs	
SL-FT-141-6w-W.WHT	80	3000K	Diameter	Height	Inbuilt	<b>Housing</b>	Aluminium
			170	60		<b>LED Make</b>	Edison
						<b>Driver Brands</b>	Srishti

### Application



## FOOT LIGHT

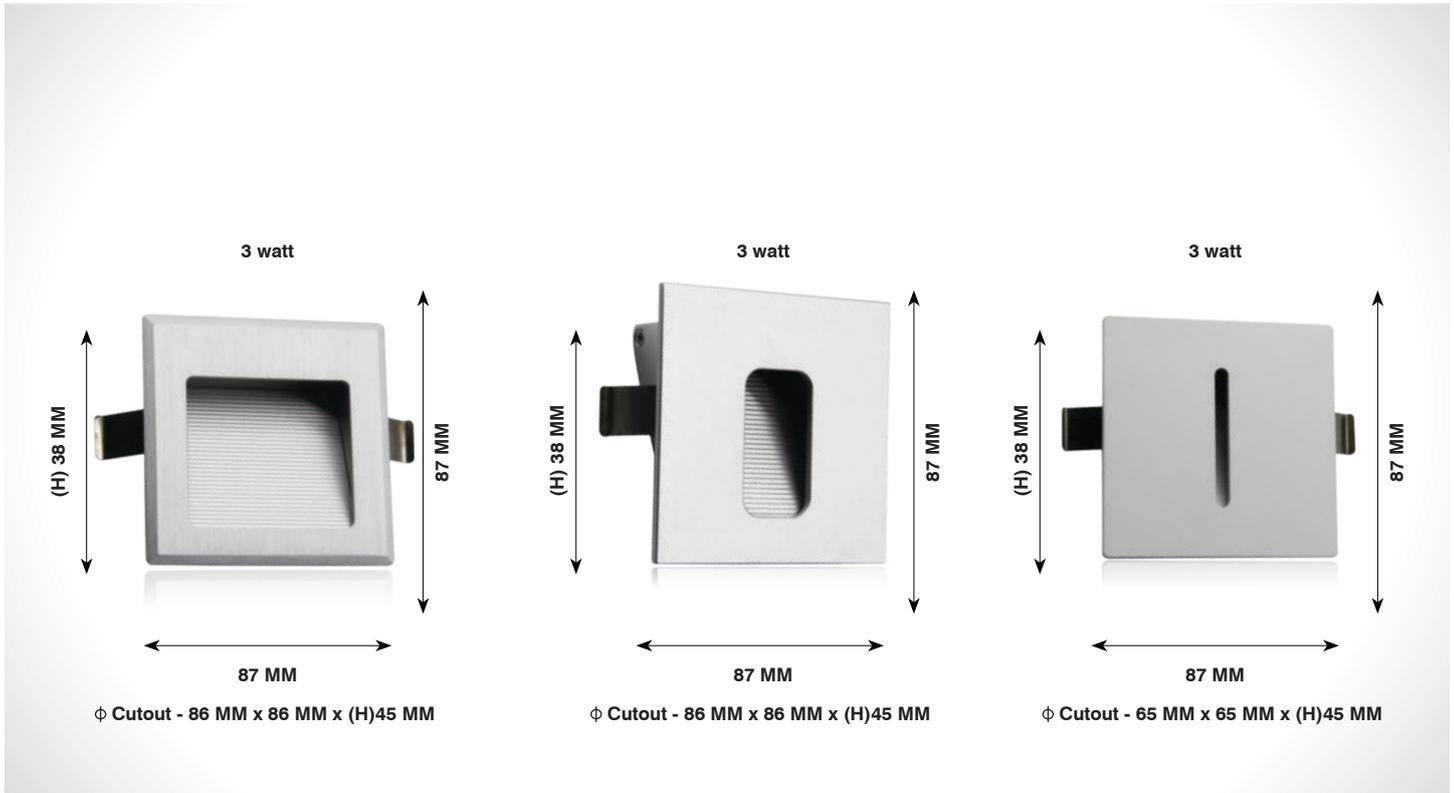

## ASTRIA

( IP20 )

Product Code	CRI	CCT	Dimension (in mm)			Driver Opt	System Specs	
SL-FT-239-3w-W.WHT	80	3000K	Diameter	Height	Cutout	3.326VDC@700mA	<b>Housing</b>	Aluminium
			87 X 87	38	φ 86 x 86 x (H)45		<b>LED Make</b>	Cree
							<b>Driver Brands</b>	Srishti

## FEDRA

( IP20 )

Product Code	CRI	CCT	Dimension (in mm)			Driver Opt	System Specs	
SL-FT-240-3w-W.WHT	80	3000K	Diameter	Height	Cutout	3.326 VDC@700mA	<b>Housing</b>	Aluminium
			87 X 87	38	φ 86 x 86 x (H)45		<b>LED Make</b>	Cree
							<b>Driver Brands</b>	Srishti

## FLARIO


( IP20 )

Product Code	CRI	CCT	Dimension (in mm)			Driver Opt	System Specs	
SL-FT-241-3w-W.WHT	80	3000K	Diameter	Height	Cutout	3.326 VDC@700mA	<b>Housing</b>	Aluminium
			87 X 87	38	φ 65 x 65 x (H)45		<b>LED Make</b>	Cree
							<b>Driver Brands</b>	Srishti

**Application**



## FOOT LIGHT

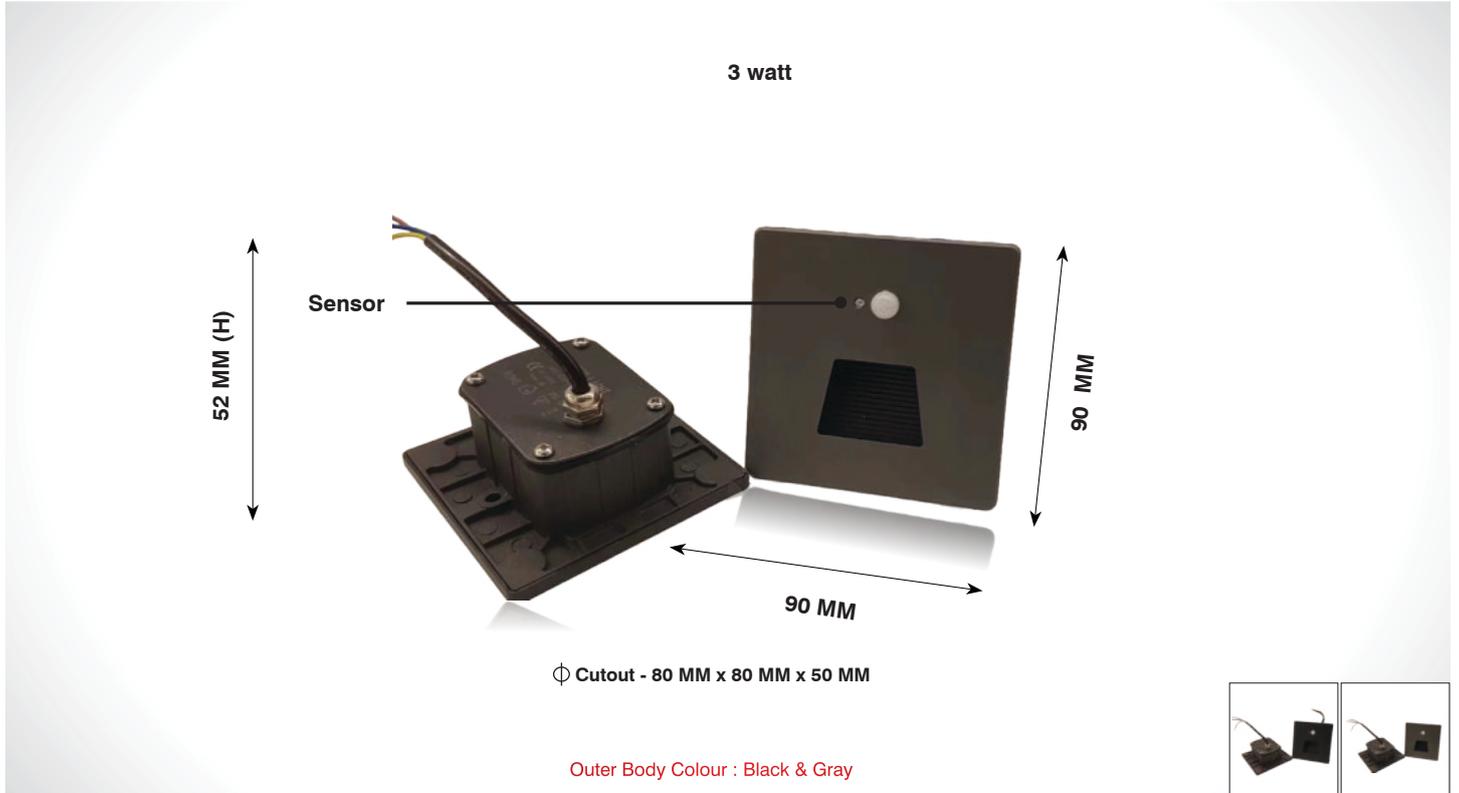

## PHANTOM A

**IP65**


**LUX SENSOR**

Product Code	CRI	CCT	Dimension (in mm)			Driver Opt	System Specs	
SL-FT-355-3w-W.WHT	80	3000K	Diameter	Height	Cutout	3V@1000mA	<b>Housing</b>	Aluminium
Sensor Base			90x90	52	∅80x80x50		<b>LED Make</b>	Cree/Osram
							<b>Driver Brands</b>	Srishti

### Application



# FOOT LIGHT

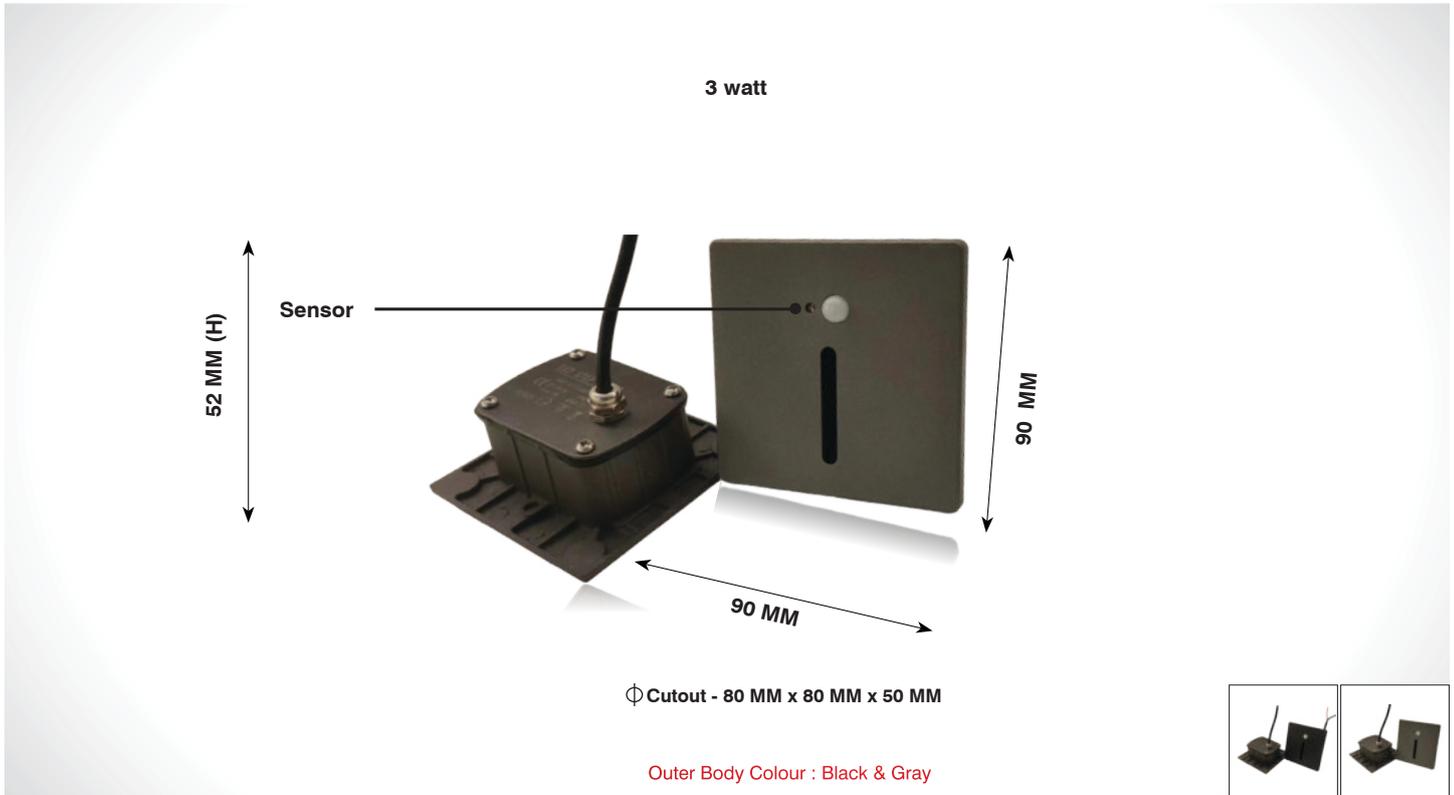

# PHANTOM B

**IP65**


**LUX SENSOR**

Product Code	CRI	CCT	Dimension (in mm)			Driver Opt	System Specs	
SL-FT-356-3w-W.WHT	80	3000K	Diameter	Height	Cutout	3V@1000mA	<b>Housing</b>	Aluminium
Sensor Base			90x90	52	Ø80x80x50		<b>LED Make</b>	Cree/Osram
							<b>Driver Brands</b>	Srishti

**Application**



# FOOT LIGHT

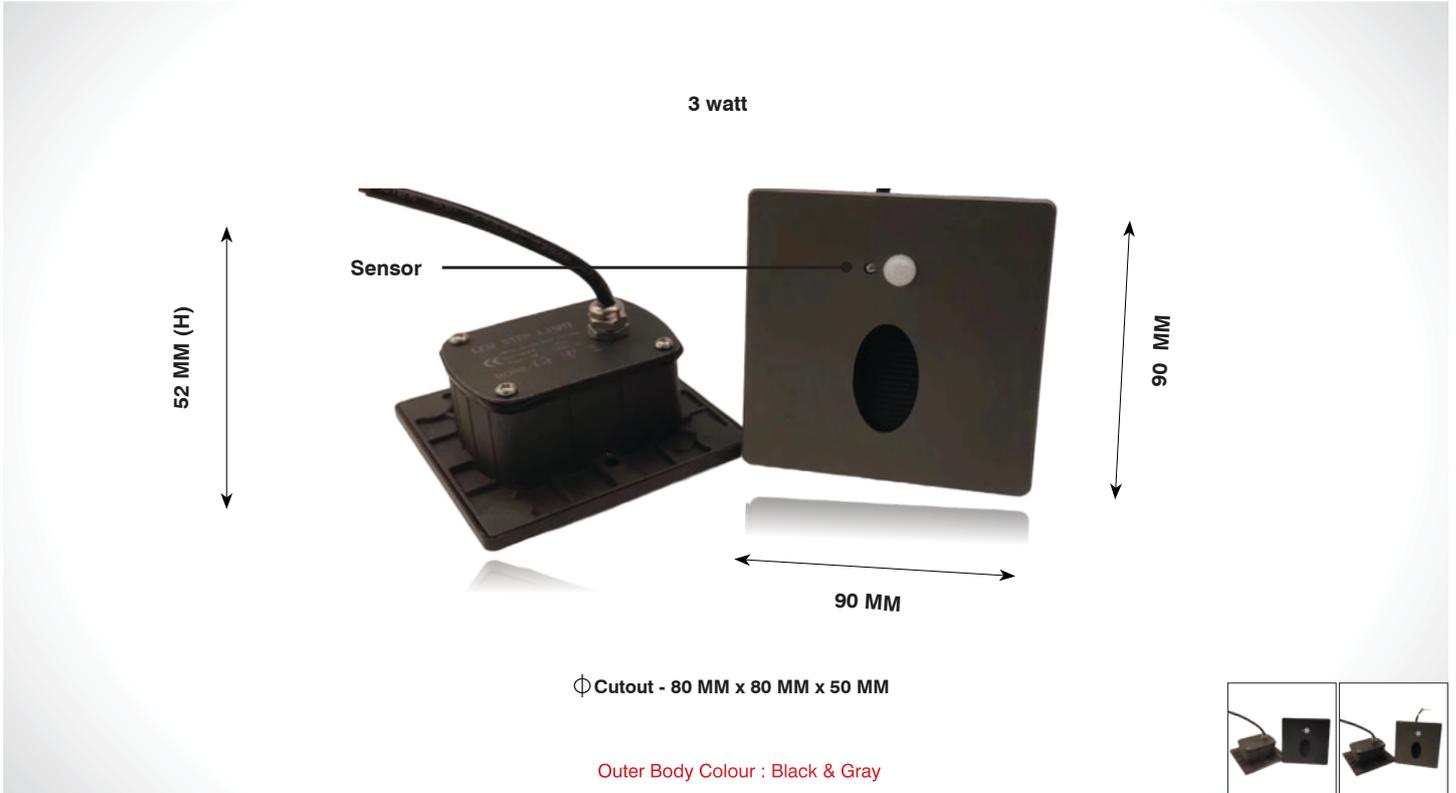

# PHANTOM C

**IP65**

**LUX SENSOR**

Product Code	CRI	CCT	Dimension (in mm)			Driver Opt	System Specs	
SL-FT-357-3w-W.WHT	80	3000K	Diameter	Height	Cutout	3V@1000mA	<b>Housing</b>	Aluminium
Sensor Base			90x90	52	Ø80x80x50		<b>LED Make</b>	Cree/Osram
							<b>Driver Brands</b>	Srishti


**Application**






JEWELLERY LIGHT SERIES

## JEWELLERY LIGHT

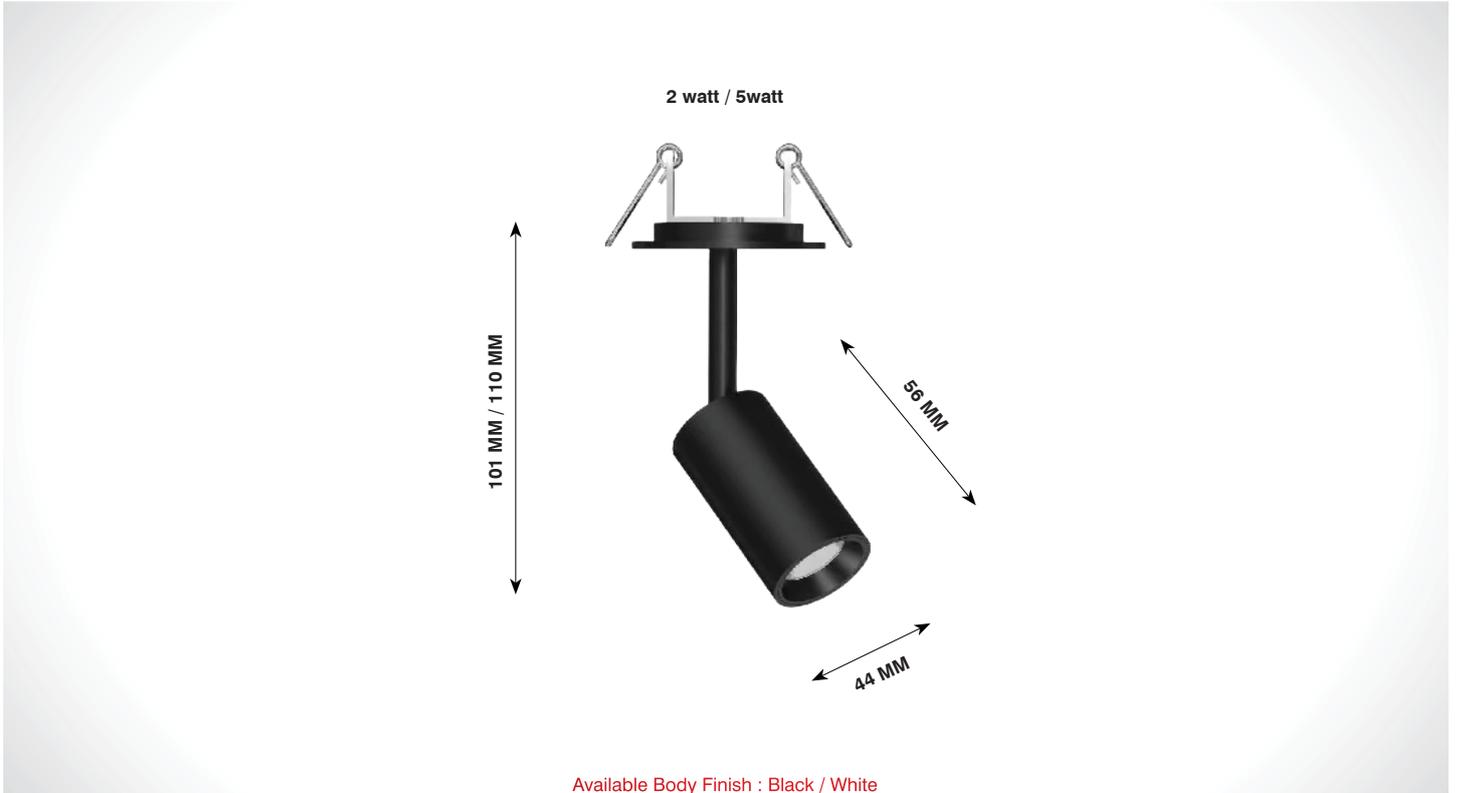


## ASTRO

Product Code	CRI	CCT	Dimension (in mm)		Lumen	System Specs	
			Diameter	Length		Housing	LED Make
SL-JSP-352-2w-R-W.WHT	80 / 90	3000K			220 lm	<b>Housing</b>	Aluminium
SL-JSP-352-2w-R-N.WHT		4000K	56 x 44	101	240 lm	<b>LED Make</b>	Citizen / Cree / Bridgelux
SL-JSP-352-2w-R-WHT		6500K			250 lm	<b>Driver Brands</b>	Constant Voltage(CV) Driver
SL-JSP-352-5w-R-W.WHT	80 / 90	3000K			550 lm	<b>Housing</b>	Aluminium
SL-JSP-352-5w-R-N.WHT		4000K	56 x 44	110	600 lm	<b>LED Make</b>	Citizen / Cree / Bridgelux
SL-JSP-352-5w-R-WHT		6500K			625 lm	<b>Driver Brands</b>	Constant Voltage(CV) Driver

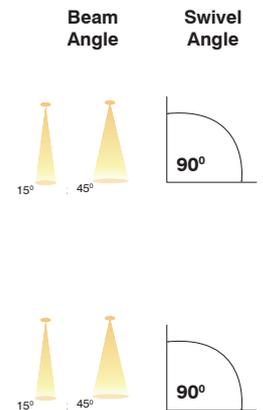


## JEWELLERY LIGHT

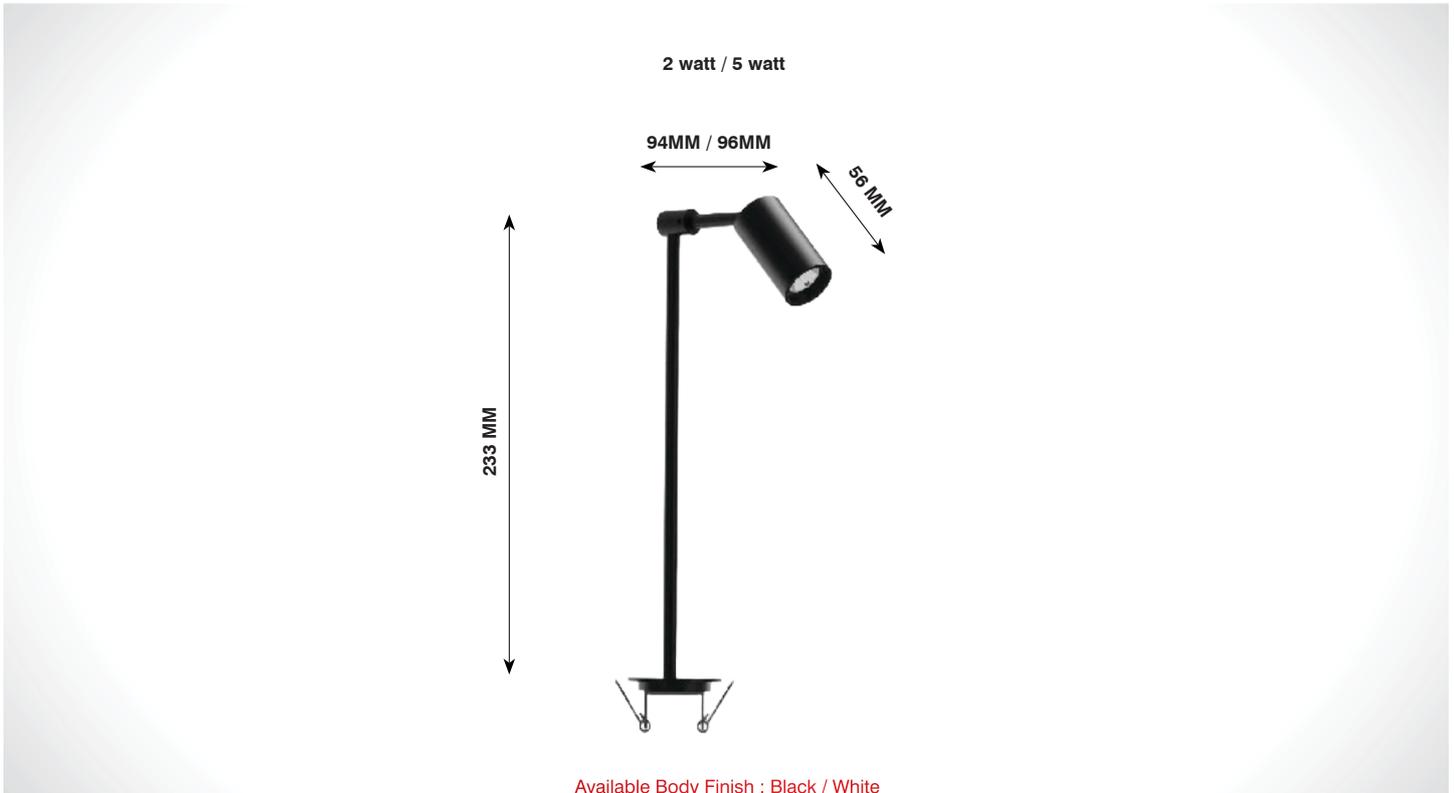


## CLIO

Product Code	CRI	CCT	Dimension (in mm)		Lumen	System Specs	
			Diameter	Length		Housing	LED Make
SL-JSS-353-2w-R-W.WHT	80 / 90	3000K			220 lm	Aluminium	
SL-JSS-353-2w-R-N.WHT		4000K	56	94 x 233	240 lm	Citizen / Cree / Bridgelux	
SL-JSS-353-2w-R-WHT		6500K			250 lm	Constant Voltage(CV) Driver	
SL-JSS-353-5w-R-W.WHT	80 / 90	3000K			550 lm	Aluminium	
SL-JSS-353-5w-R-N.WHT		4000K	56	96 x 233	600 lm	Citizen / Cree / Bridgelux	
SL-JSS-353-5w-R-WHT		6500K			625 lm	Constant Voltage(CV) Driver	

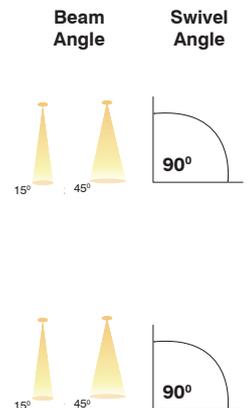


## JEWELLERY LIGHT

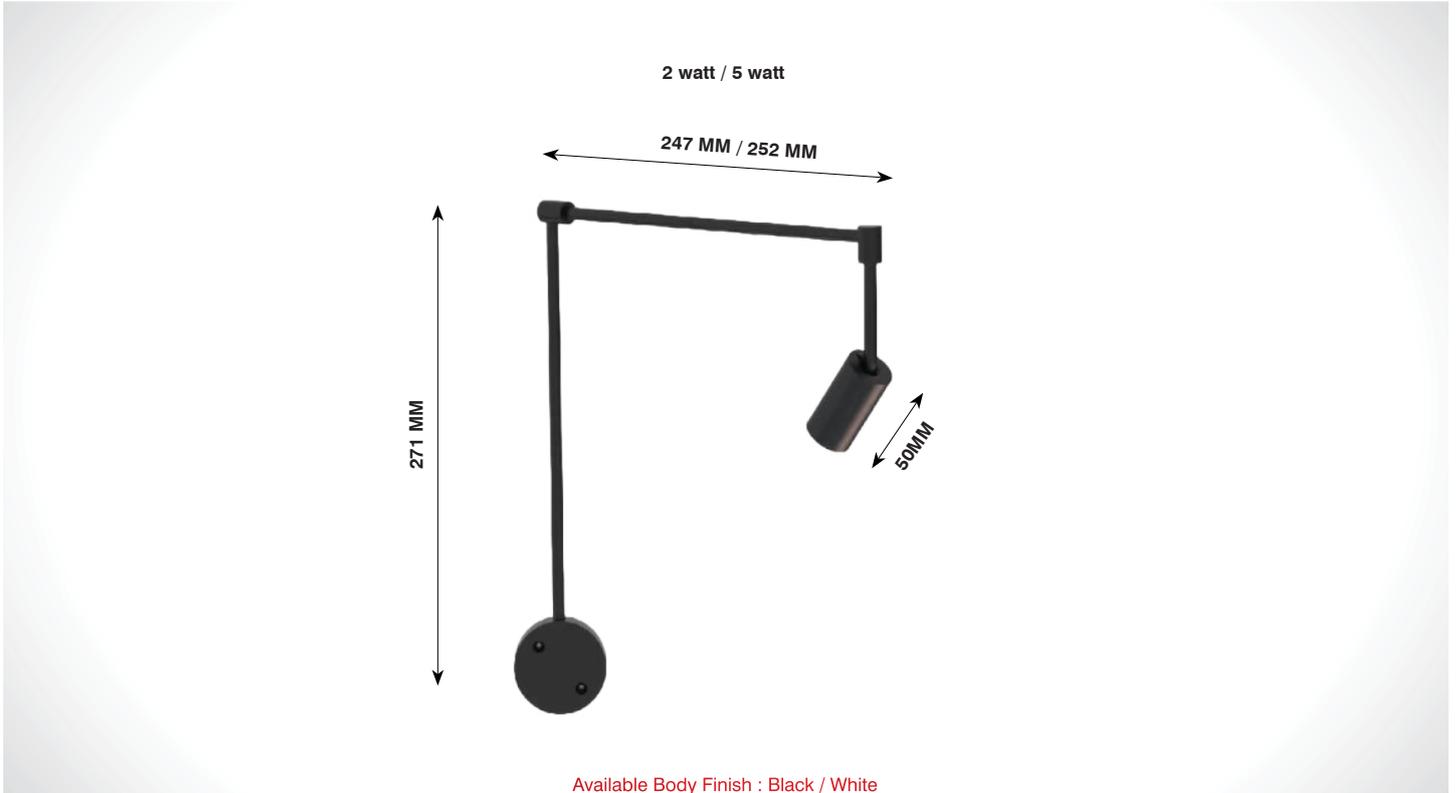


Available Body Finish : Black / White

## ELSA

Product Code	CRI	CCT	Dimension (in mm)		Lumen	System Specs	
			Diameter	Length		Housing	LED Make
SL-JMS-354-2w-R-W.WHT	80 / 90	3000K			220 lm	Aluminium	
SL-JMS-354-2w-R-N.WHT		4000K	50	247 x 271	240 lm	Citizen / Cree / Bridgelux	
SL-JMS-354-2w-R-WHT		6500K			250 lm	Constant Voltage(CV) Driver	
SL-JMS-354-5w-R-W.WHT	80 / 90	3000K			550 lm	Aluminium	
SL-JMS-354-5w-R-N.WHT		4000K	50	252 x 271	600 lm	Citizen / Cree / Bridgelux	
SL-JMS-354-5w-R-WHT		6500K			625 lm	Constant Voltage(CV) Driver	

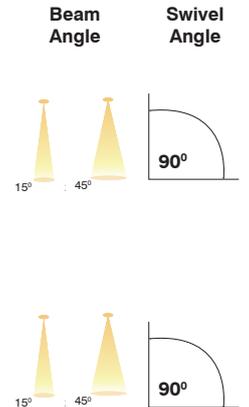

## JEWELLERY LIGHT

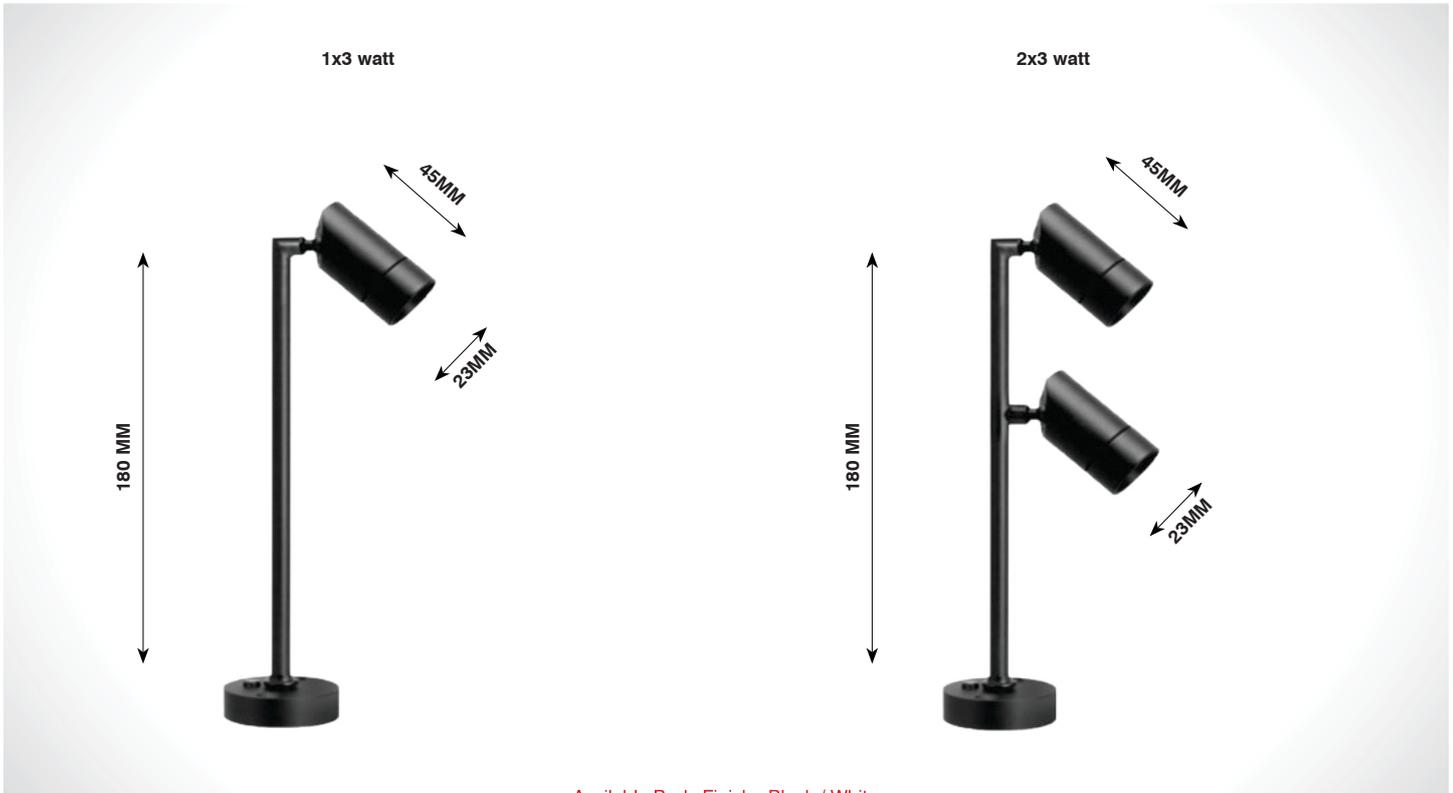


Available Body Finish : Black / White

## ELTON

### Surface Mounted

Product Code	CRI	CCT	Dimension (in mm)			Lumen	System Specs	
			Diameter	Height	Pole		Housing	Aluminium
SL-JSS-397-1x3w-R-W.WHT	80 / 90	3000K	23	45	180	330 lm	<b>Housing</b>	Aluminium
SL-JSS-397-1x3w-R-N.WHT		4000K	23	45	180	360 lm	<b>LED Make</b>	Cree
SL-JSS-397-1x3w-R-WHT		6500K				375 lm	<b>Driver Brands</b>	-



## ELTONEX

### Surface Mounted

Product Code	CRI	CCT	Dimension (in mm)			Lumen	System Specs	
			Diameter	Height	Pole		Housing	Aluminium
SL-JSS-398-2x3w-R-W.WHT	80 / 90	3000K	23	45	180	660 lm	<b>Housing</b>	Aluminium
SL-JSS-398-2x3w-R-N.WHT		4000K	23	45	180	720 lm	<b>LED Make</b>	Cree
SL-JSS-398-2x3w-R-WHT		6500K				750 lm	<b>Driver Brands</b>	-



24V (Use Any 24V External SMPS)

On request also available in CCT - 2700K / 3500K / 5000K

## JEWELLERY LIGHT




Available Body Finish : Black / White

## ALTAS

### Surface Mounted

Product Code	CRI	CCT	Dimension (in mm)		Lumen	System Specs	
SL-JSS-399-3w-R-W.WHT	80 / 90	3000K	Diameter	Height	330 lm	<b>Housing</b>	Aluminium
SL-JSS-399-3w-R-N.WHT		4000K	23	45	360 lm	<b>LED Make</b>	Cree
SL-JSS-399-3w-R-WHT		6500K			375 lm	<b>Driver Brands</b>	-




24V (Use Any 24V External SMPS)



WALL LIGHT SERIES

## WALL LIGHT

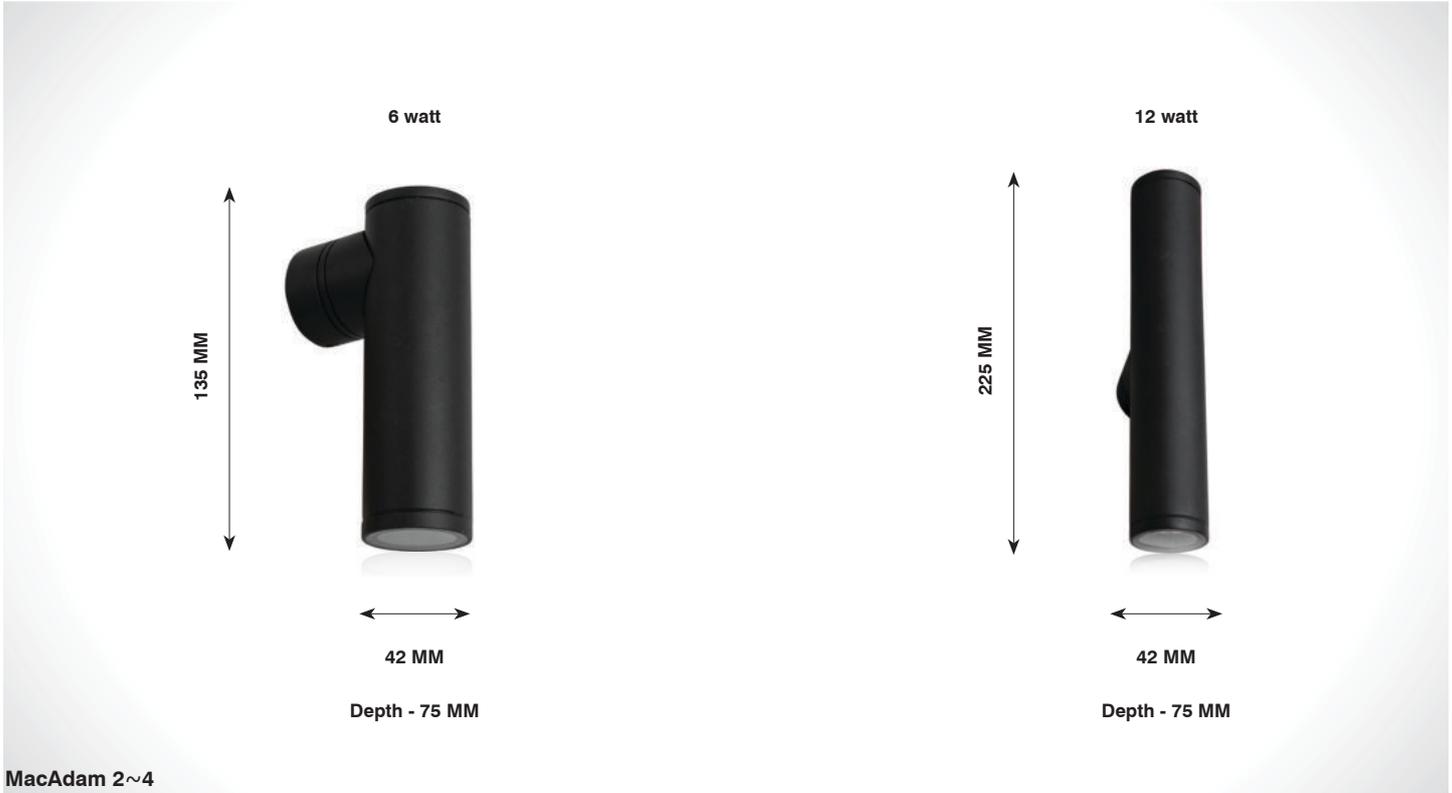

## FLIP

( IP65 )

Product Code	CRI	CCT	Dimension (in mm)			Lumen	Driver Opt	System Specs	
SL-WL-270-6w-R	80 / 90	3000K	Diameter	Height	Depth	660 lm	36-42V@150 mA	<b>Housing</b>	Aluminium
			42	135	75			<b>LED Make</b>	Bridglux /Cree
								<b>Driver Brands</b>	Philips
								<b>Dimming</b>	NA

## IRAN


( IP65 )

Product Code	CRI	CCT	Dimension (in mm)			Lumen	Driver Opt	System Specs	
SL-WL-271-12w-R	80 / 90	3000K	Diameter	Height	Depth	1320 lm	36-42V@150 mA x 2	<b>Housing</b>	Aluminium
			42	225	75			<b>LED Make</b>	Bridglux /Cree
								<b>Driver Brands</b>	Philips
								<b>Dimming</b>	NA

### Application



## WALL LIGHT

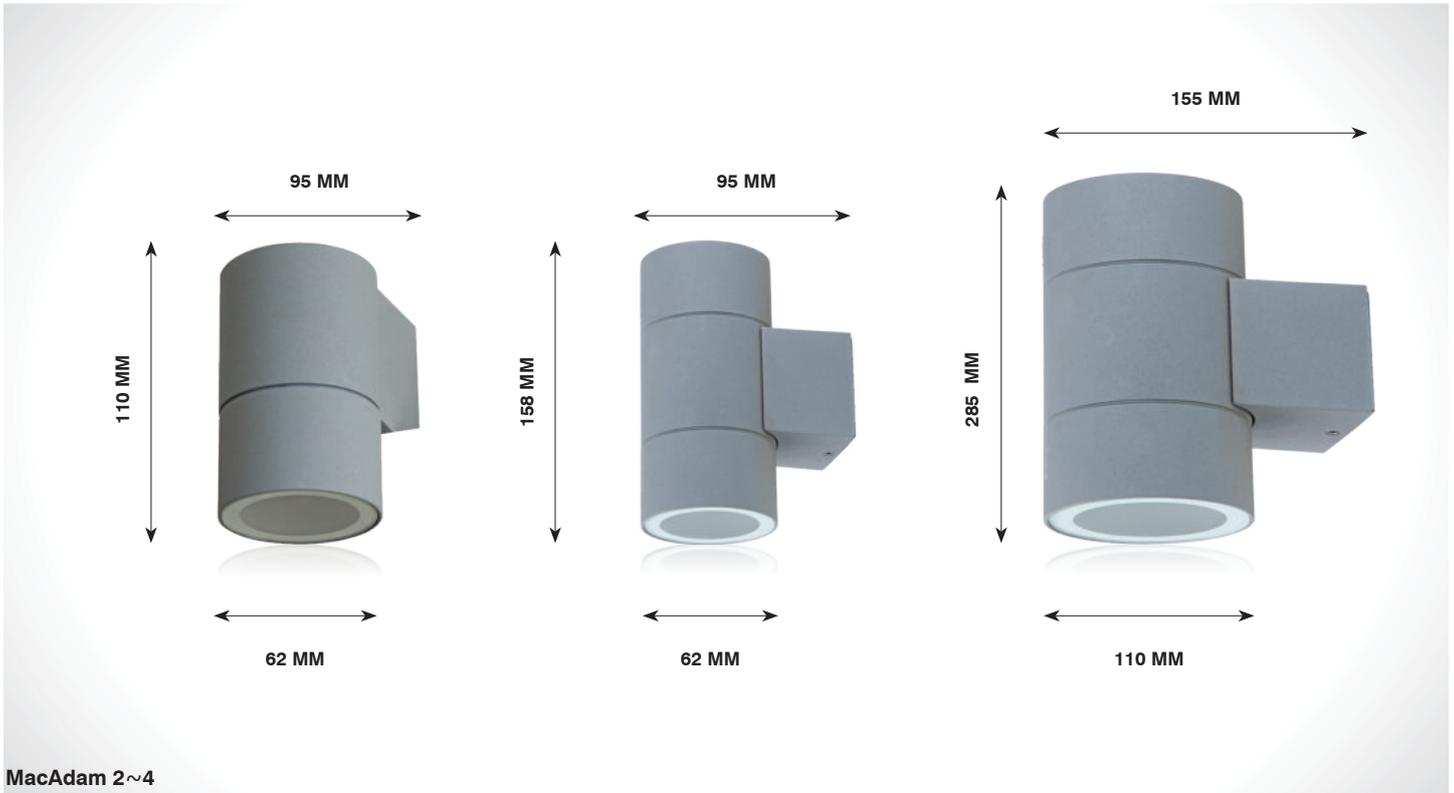

## CARLOS

( IP65 )

Product Code	Dimension (in mm)			System Specs	
	Diameter	Height	Depth	Housing	Aluminium
SL-WL-165	62	110	95		

## JUAN

( IP65 )

Product Code	Dimension (in mm)			System Specs	
	Diameter	Height	Depth	Housing	Aluminium
SL-WL-166	62	158	95		

## ALWA

( IP65 )

Product Code	Dimension (in mm)			System Specs	
	Diameter	Height	Depth	Housing	Aluminium
SL-WL-167	110	285	155		

### Application



## WALL LIGHT



## GIZMO


( IP65 )

Product Code	CRI	CCT	Dimension (in mm)			Lumen	Driver Opt	System Specs	
SL-WL-365-8w-R	80 / 90	3000K	Diameter	Height	Depth	880 lm	36-42V@200mA	<b>Housing</b>	Aluminium
			45	95	58			<b>LED Make</b>	Cree / Osram
								<b>Driver Brands</b>	Srishti
SL-WL-366-16w-R	80 / 90	3000K	Diameter	Height	Depth	1760 lm	36-42V@350mA	<b>Housing</b>	Aluminium
			75	180	85			<b>LED Make</b>	Cree / Osram
								<b>Driver Brands</b>	Srishti

### Application



## WALL LIGHT

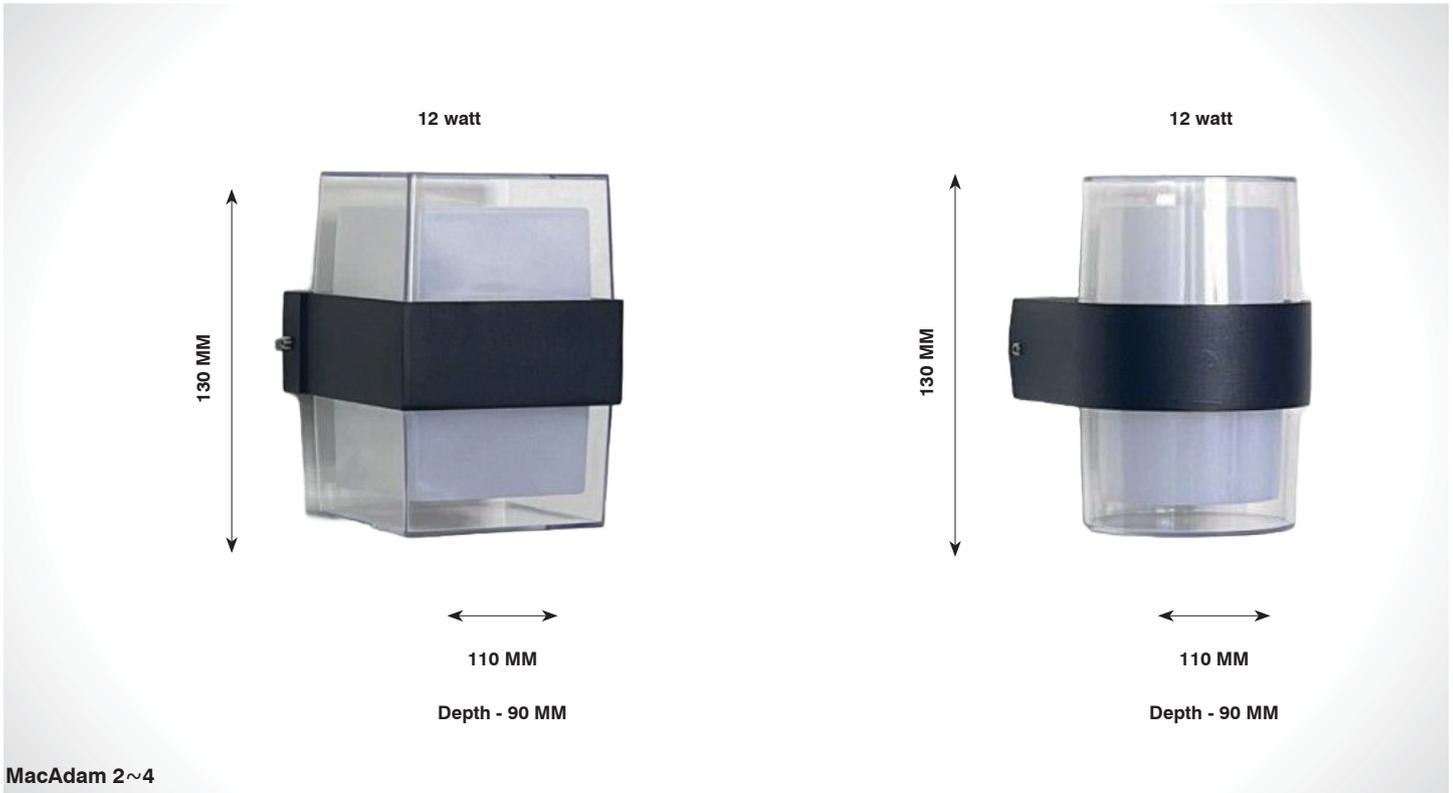

## HADES

( IP65 )

Product Code	CRI	CCT	Dimension (in mm)			Lumen	Driver Opt	System Specs	
SL-WL-367-12w-S	80 / 90	3000K	Diameter	Height	Depth	1320 lm	36-42V@300mA	<b>Housing</b>	Aluminium
			110	130	90			<b>LED Make</b>	Cree / Osram
								<b>Driver Brands</b>	Srishti

## HESTIA

( IP65 )

Product Code	CRI	CCT	Dimension (in mm)			Lumen	Driver Opt	System Specs	
SL-WL-368-12w-R	80 / 90	3000K	Diameter	Height	Depth	1320 lm	36-42V@300mA	<b>Housing</b>	Aluminium
			110	130	90			<b>LED Make</b>	Cree / Osram
								<b>Driver Brands</b>	Srishti

### Application




A photograph of a garden path at dusk. The path is made of light-colored stone slabs set in a bed of grey gravel. The path is flanked by green bushes with small white flowers. Several tall, cylindrical bollard lights are placed along the path, casting a warm, yellowish glow. The sky is dark, and the overall atmosphere is serene and modern.

BOLLARD LIGHT  
SERIES

## BOLLARD LIGHT

**NEW**

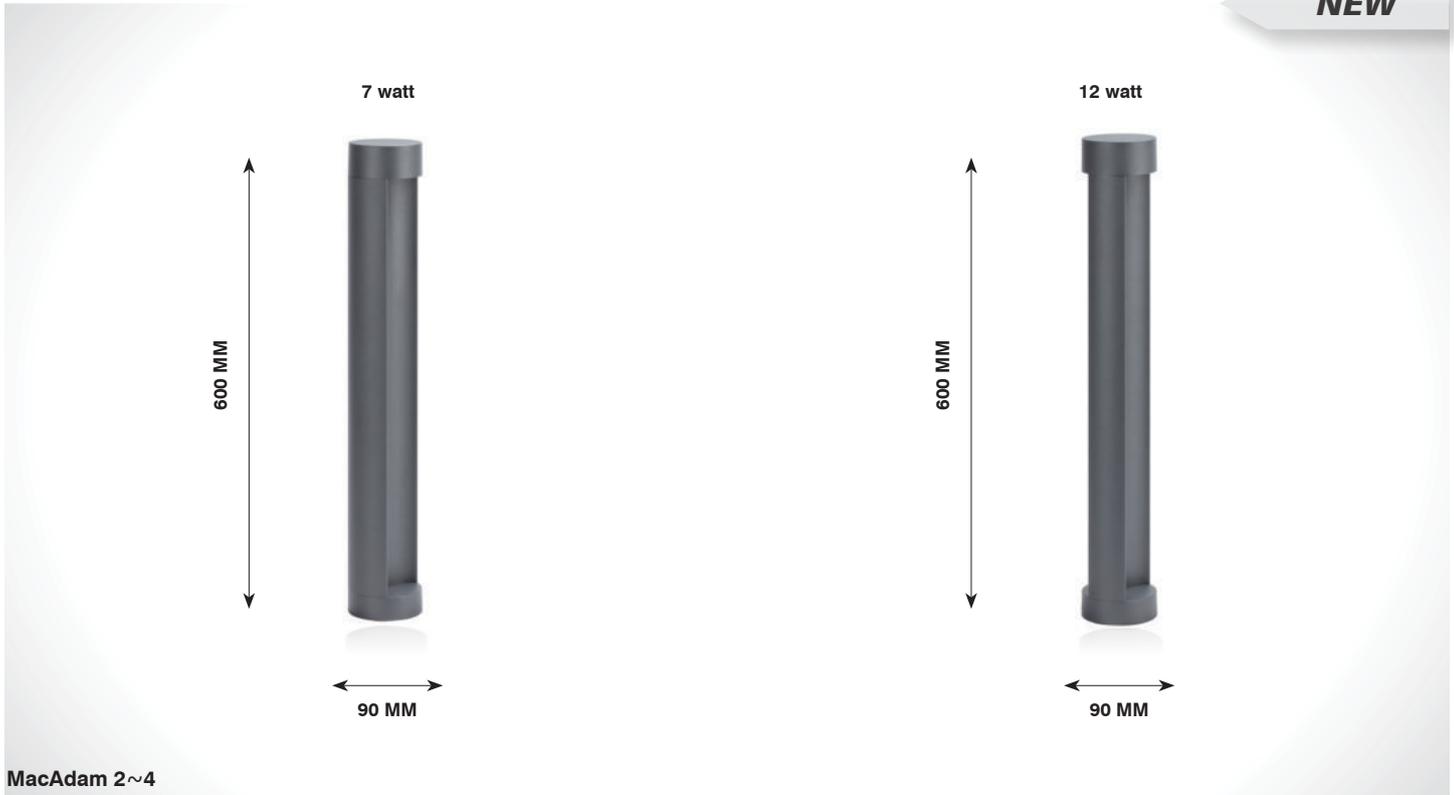

MacAdam 2~4

## ZANE

( IP65 )

Product Code	CRI	CCT	Dimension (in mm)		Lumen	Driver Opt	System Specs	
			Diameter	Height			Housing	Aluminium
SL-BL-395-7w-R	80 / 90	3000K	90	600	240 lm	NA	Housing	Aluminium


## ZION

( IP65 )

Product Code	CRI	CCT	Dimension (in mm)		Lumen	Driver Opt	System Specs	
			Diameter	Height			Housing	Aluminium
SL-BL-396-12w-R	80 / 90	3000K	90	600	520 lm	NA	Housing	Aluminium

**Application**



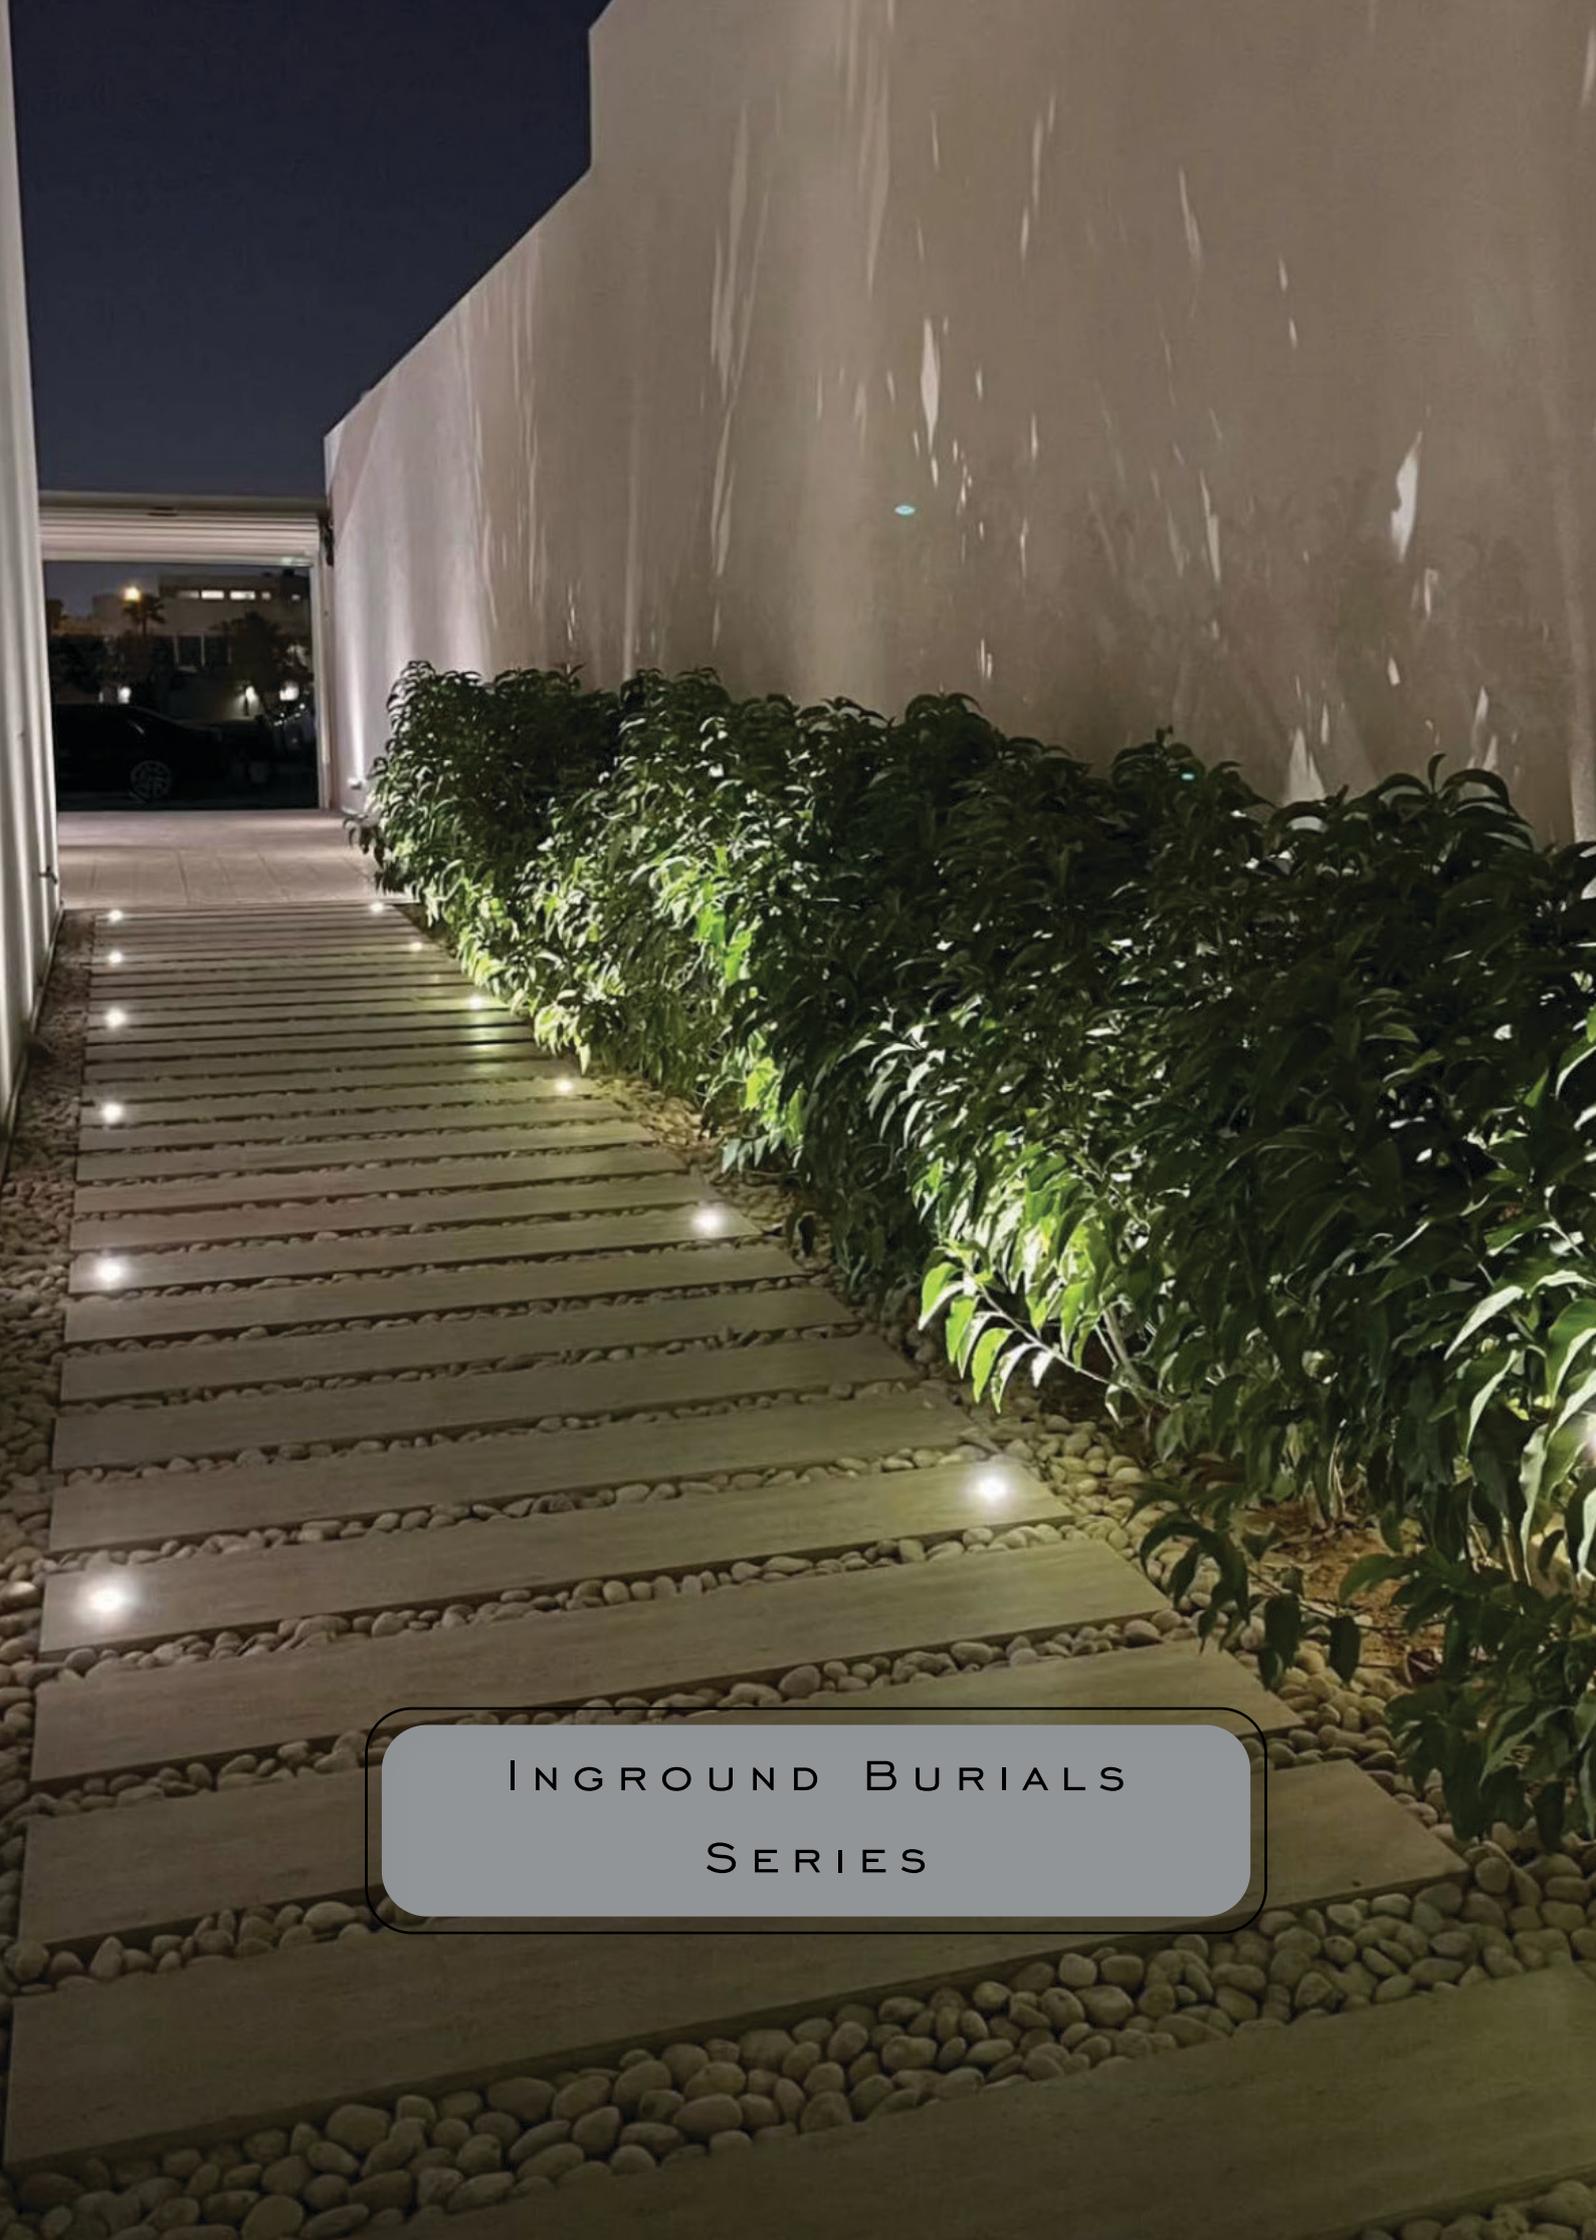

INGROUND BURIALS  
SERIES

## INGROUND BURIALS





## ZORRO

( IP65 )

Product Code	CRI	CCT	Dimension (in mm)			Lumen	Driver Opt	System Specs	
SL-IG-59-1x1w-R-W.WHT	80	3000K	Diameter	Height	Cutout	110 lm	3-3.5V@350mA	<b>Housing</b>	SS + Aluminium
SL-IG-59-1x1w-R-N.WHT		4000K	45	50	φ 38	120 lm		<b>LED Make</b>	Edision
SL-IG-59-1x1w-WHT-R		6500K				125 lm		<b>Driver Brands</b>	Srishti
SL-IG-59-1x3w-R-W.WHT	80	3000K	Diameter	Height	Cutout	330 lm	3-3.5V@700mA	<b>Housing</b>	SS + Aluminium
SL-IG-59-1x3w-R-N.WHT		4000K	45	50	φ 38	360 lm		<b>LED Make</b>	Edision
SL-IG-59-1x3w-R-WHT		6500K				375 lm		<b>Driver Brands</b>	Srishti

### Beam Angle



### Application



## INGROUND BURIALS




## ZITA

( IP65 )

Product Code	CRI	CCT	Dimension (in mm)			Lumen	Driver Opt	System Specs	
SL-IG-58-3x1w-R-W.WHT	80	3000K	Diameter	Height	Cutout	330 lm	3-12V@350mA	<b>Housing</b>	SS + Aluminium
SL-IG-58-3x1w-R-N.WHT		4000K	85	65	φ 65	360 lm		<b>LED Make</b>	Edision
SL-IG-58-3x1w-WHT		6500K				375 lm		<b>Driver Brands</b>	Srishti

Beam Angle




## ZURINA

( IP65 )


Product Code	CRI	CCT	Dimension (in mm)			Lumen	Driver Opt	System Specs	
SL-IG-193-10w-R-W.WHT	80	3000K	Diameter	Height	Cutout	1100 lm	36-42V@250mA	<b>Housing</b>	Aluminium
SL-IG-193-10w-R-N.WHT		4000K	85	70	φ 73	1200 lm		<b>LED Make</b>	Citizen
SL-IG-193-10w-R-WHT		6500K				1250 lm		<b>Driver Brands</b>	Fulham

Beam Angle




Application



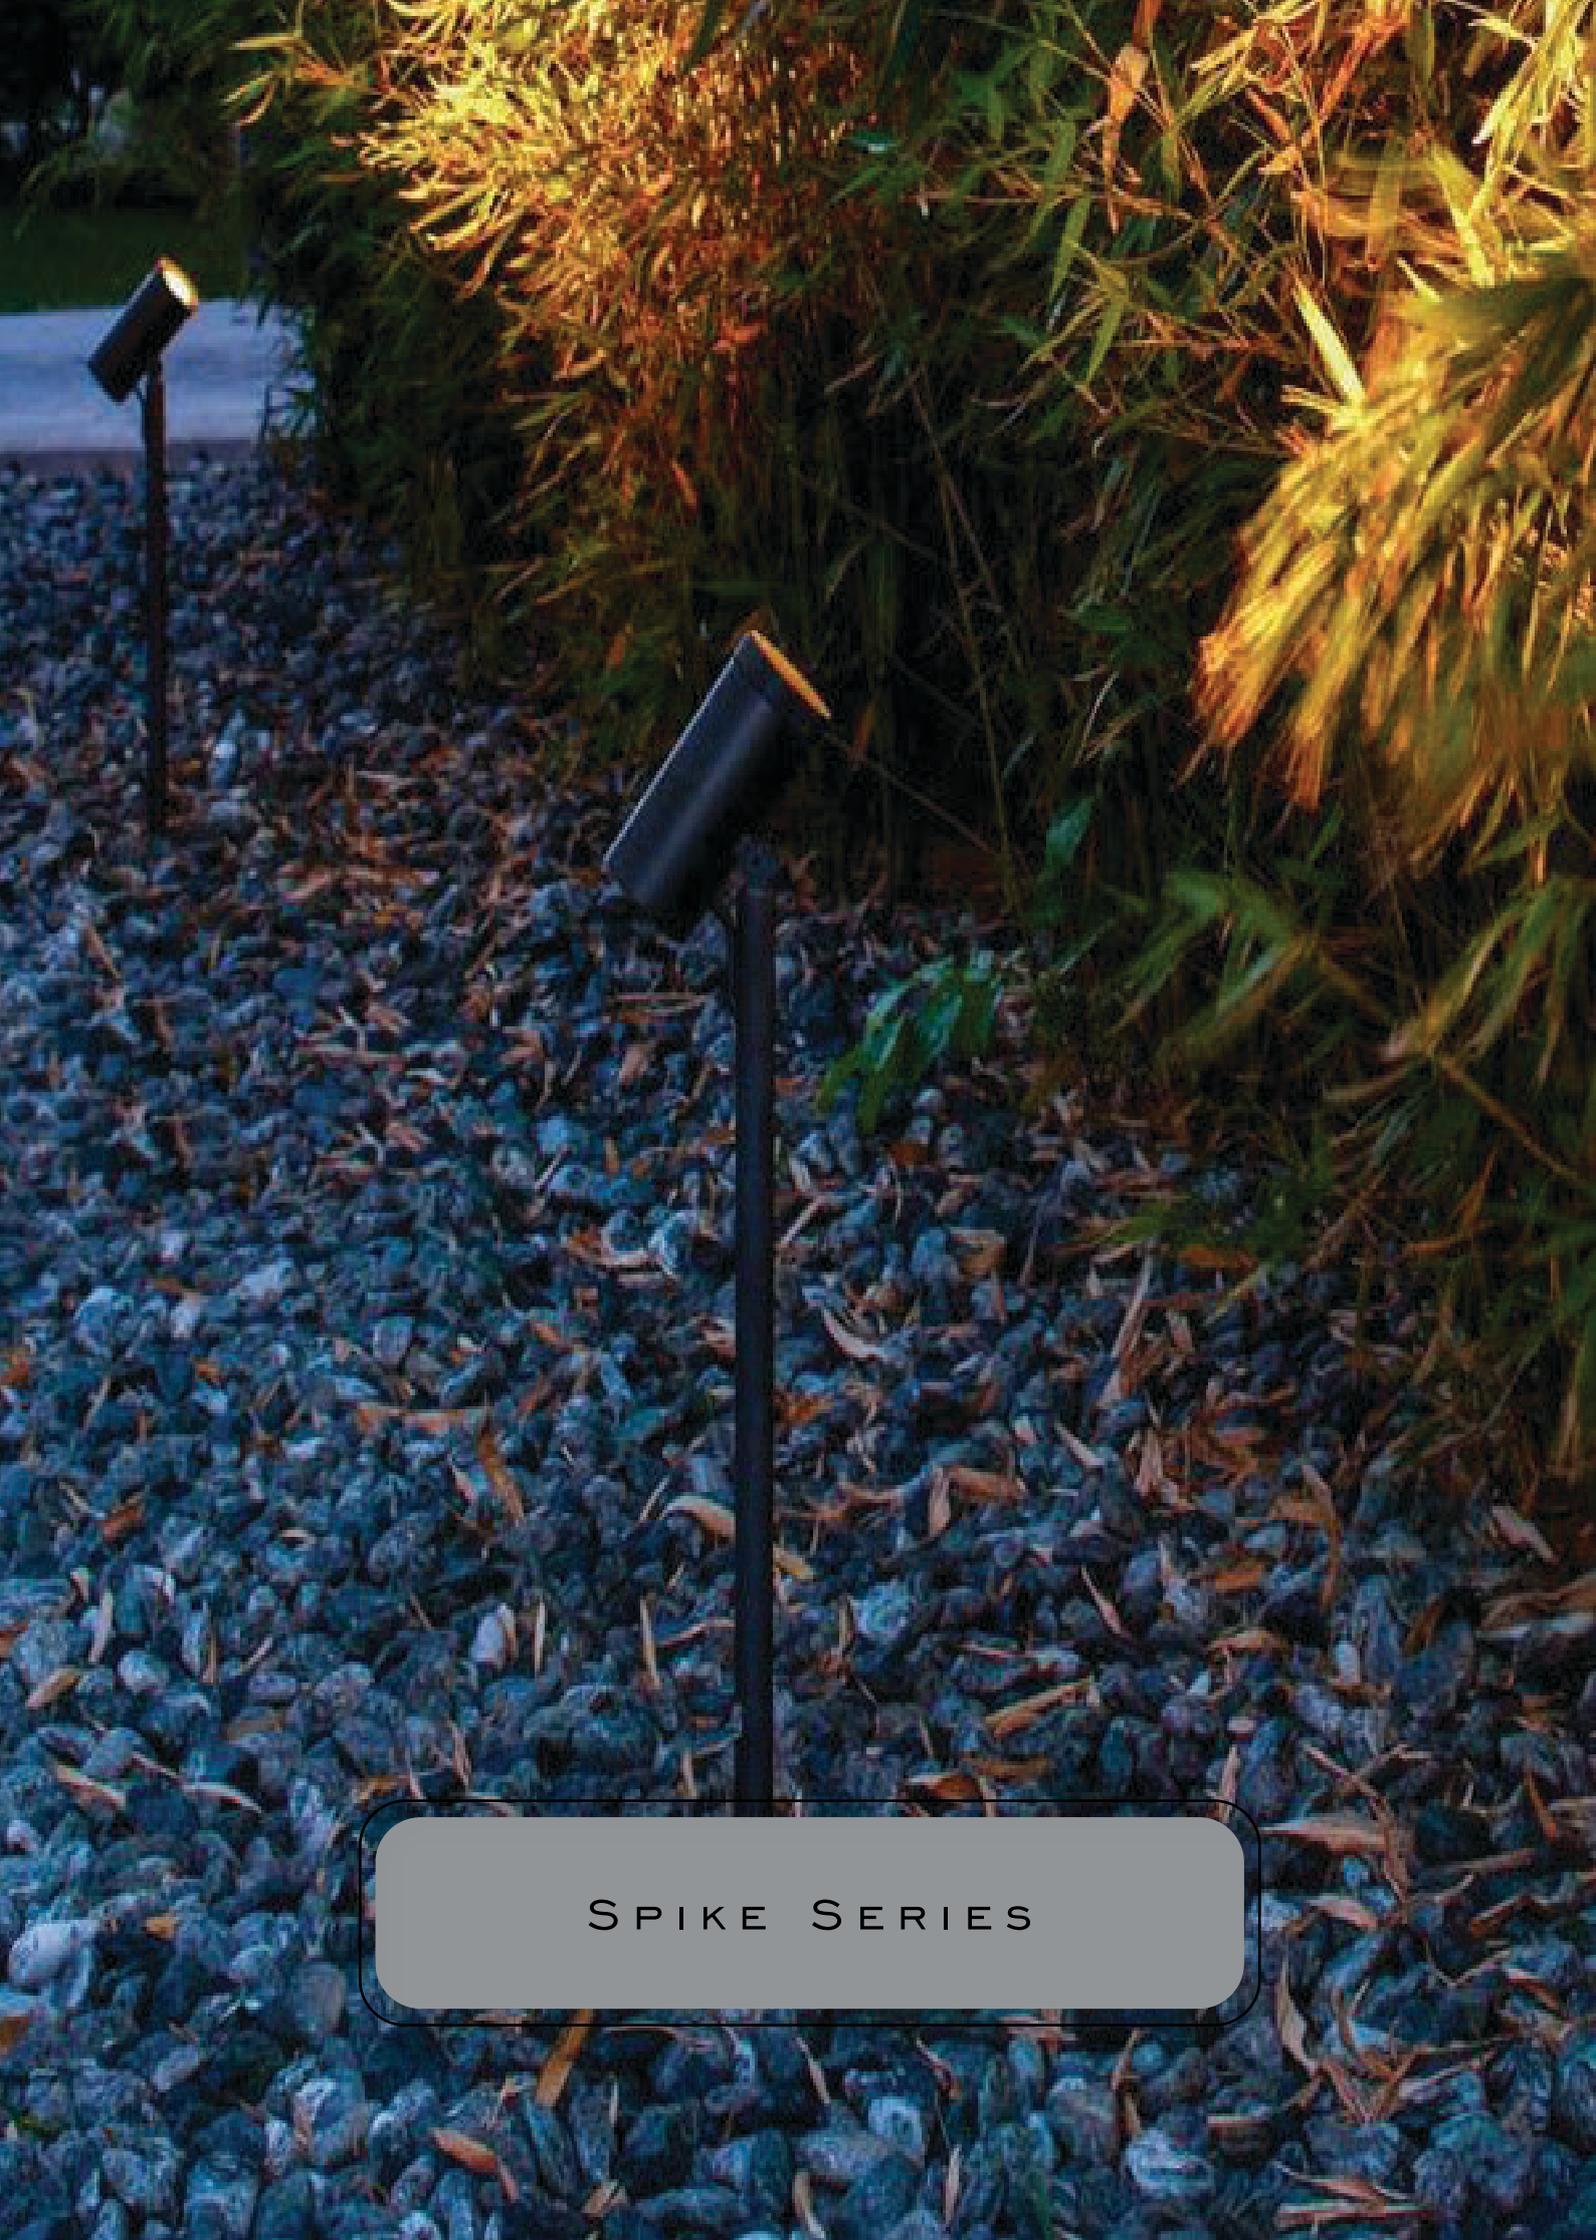

SPIKE SERIES

# SPIKE LIGHT

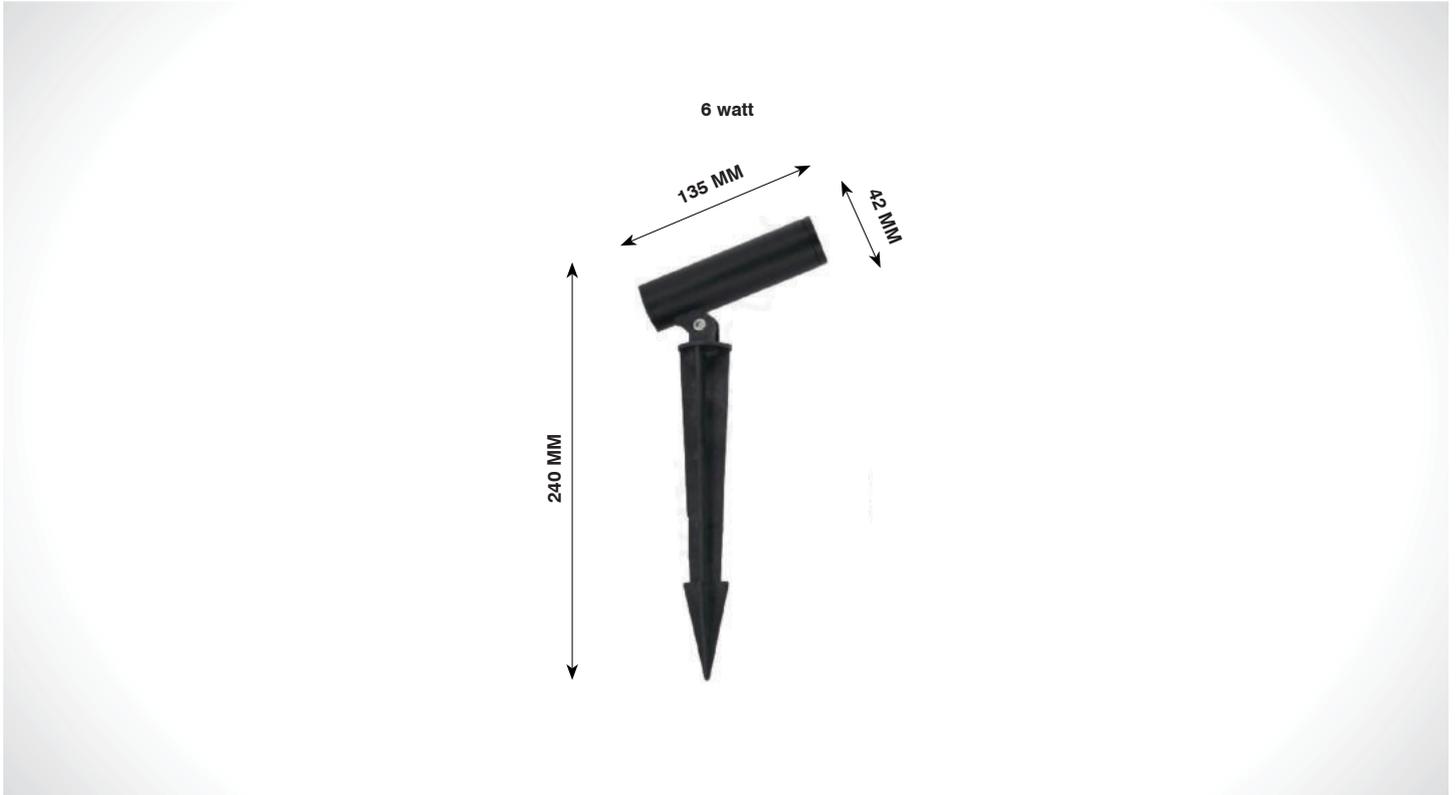

# OLGA

( IP65 )

Product Code	CRI	CCT	Dimension (in mm)			Driver Opt	System Specs	
			Diameter	Height	Depth		Housing	LED Make
SL-SPK-273-6w-R-W.WHT	80	3000K				36-42V@150mA	Aluminium	
SL-SPK-273-6w-R-N.WHT		4000K	42	240	135		Bridglux /Cree	
SL-SPK-273-6w-R-WHT		6500K					Philips	

Beam Angle



24°


**Application**





SPIKE / WALL WASHER  
LIGHT SERIES

## SPIKE / WALL WASHER LIGHT

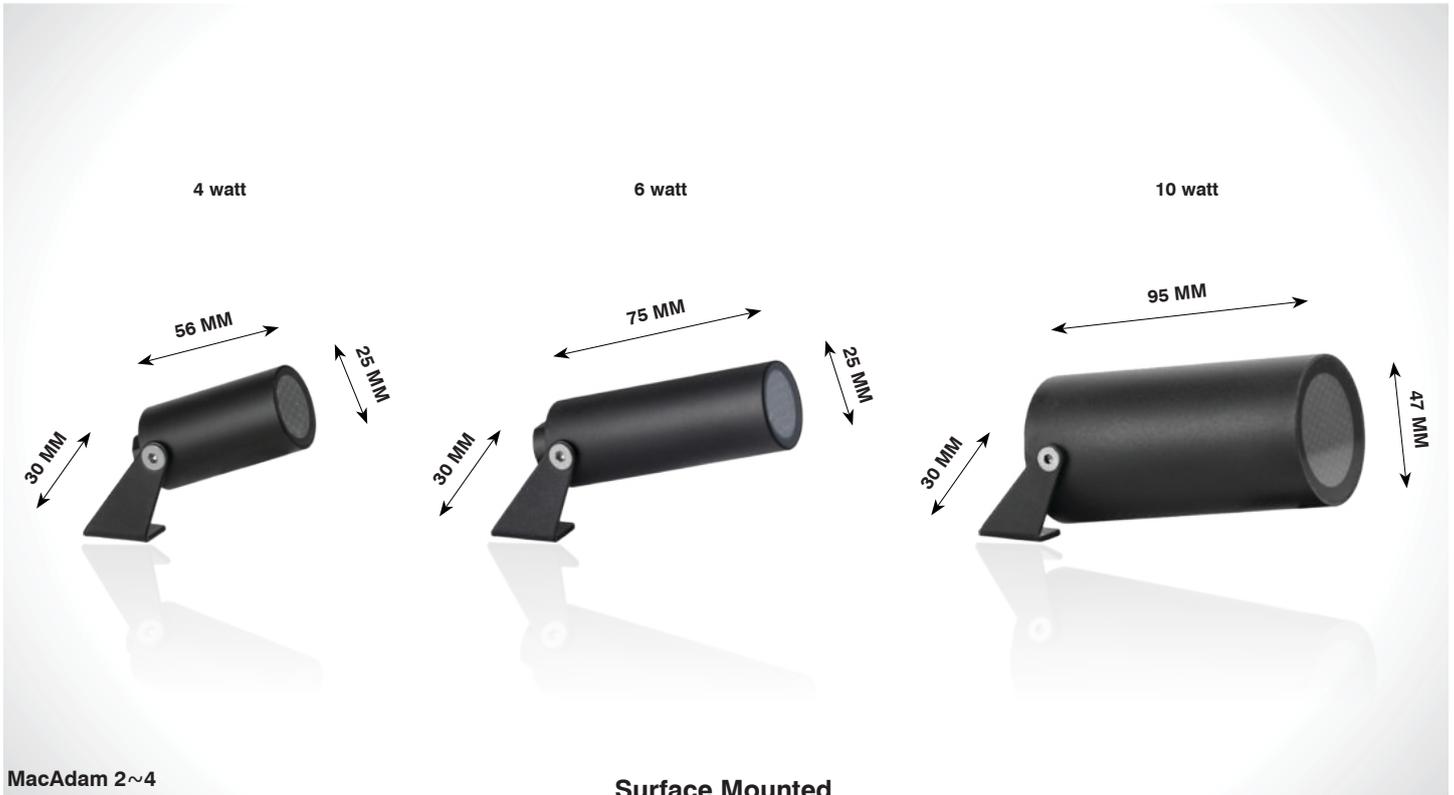

MacAdam 2~4




Surface Mounted

### NIKO

( IP65 )

Product Code	CRI	CCT	Dimension (in mm)			Driver Opt	System Specs	
			Diameter	Height	Base		Housing	LED Make
SL-SP-400-4w-R-W.WHT	90	3000K	25	56	30	-	Aluminium	Cree
SL-SP-400-6w-R-W.WHT	90	3000K	25	75	30	-	Aluminium	Cree
SL-SP-400-10w-R-W.WHT	90	3000K	47	95	30	-	Aluminium	Cree

#### Beam Angle



24V (Use Any 24V External SMPS)

#### Application





LINEAR PROFILE SERIES

## LINEAR PROFILE



SL-ALP-145-SB (SURFACE BASIC)



SL-ALP-146-CB (CONCEAL BASIC)



SL-ALP-147-LB (LINEAR BASIC)




SL-ALP-148-LB (LINEAR BASIC)



SL-ALP-CORNER PROFILE



SL-ALP-35MM X 35MM SURFACE




SL-ALP-148-50MM X 50MM SURFACE

Product Code	Dimension (in mm)				Housing
	Length	Width	Height	Cutout	
SL-ALP-145-SB (Surface Basic)	2000	18	8	-	Aluminium
SL-ALP-146-CB (Conceal Basic)	2000	23.2	8	18	Aluminium
SL-ALP-147-LB (Deep Conceal Basic)	2000	27	14.5	18	Aluminium
SL-ALP-148-LB (Deep Surface Basic)	2000	18	14.5	-	Aluminium
SL-ALP-Corner Profile	2000	10	16	-	Aluminium
SL-ALP-35mm x 35mm Surface	2000	35	37	-	Aluminium
SL-ALP-50mm x 50mm Surface	2000	50	37	-	Aluminium



MR16 HOUSING SERIES

## MR16 HOUSING

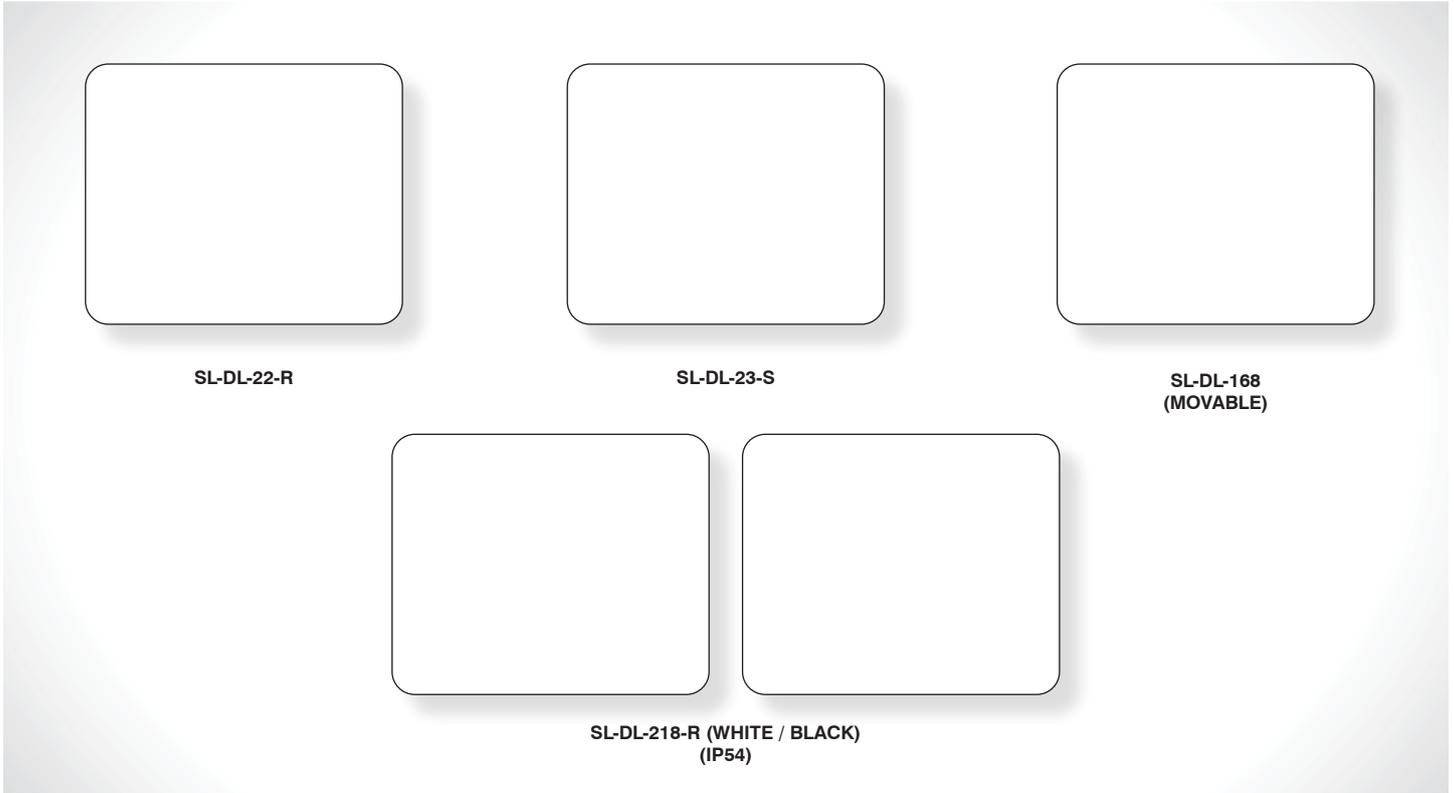

## FEDOR

Product Code	Dimension (in mm)		
	Diameter	Height	Cutout
SL-DL-22-R	110	65	φ90

## MORIS

Product Code	Dimension (in mm)		
	Diameter	Height	Cutout
SL-DL-23-S	110 X 110	65	φ90

## MALTA

Product Code	Dimension (in mm)		
	Diameter	Height	Cutout
SL-DL-168-R	90	61	φ75


## NESTOR

Product Code	Dimension (in mm)		
	Diameter	Height	Cutout
SL-DL-218-R	85	65	φ75

The image displays various components for track channel systems, including white and black channels, end caps, and terminal blocks. A central text box contains the title. The background is a plain, light-colored surface.

TRACK CHANNEL &  
ACCESSORIES

## TRACK CHANNEL & ACCESSORIES

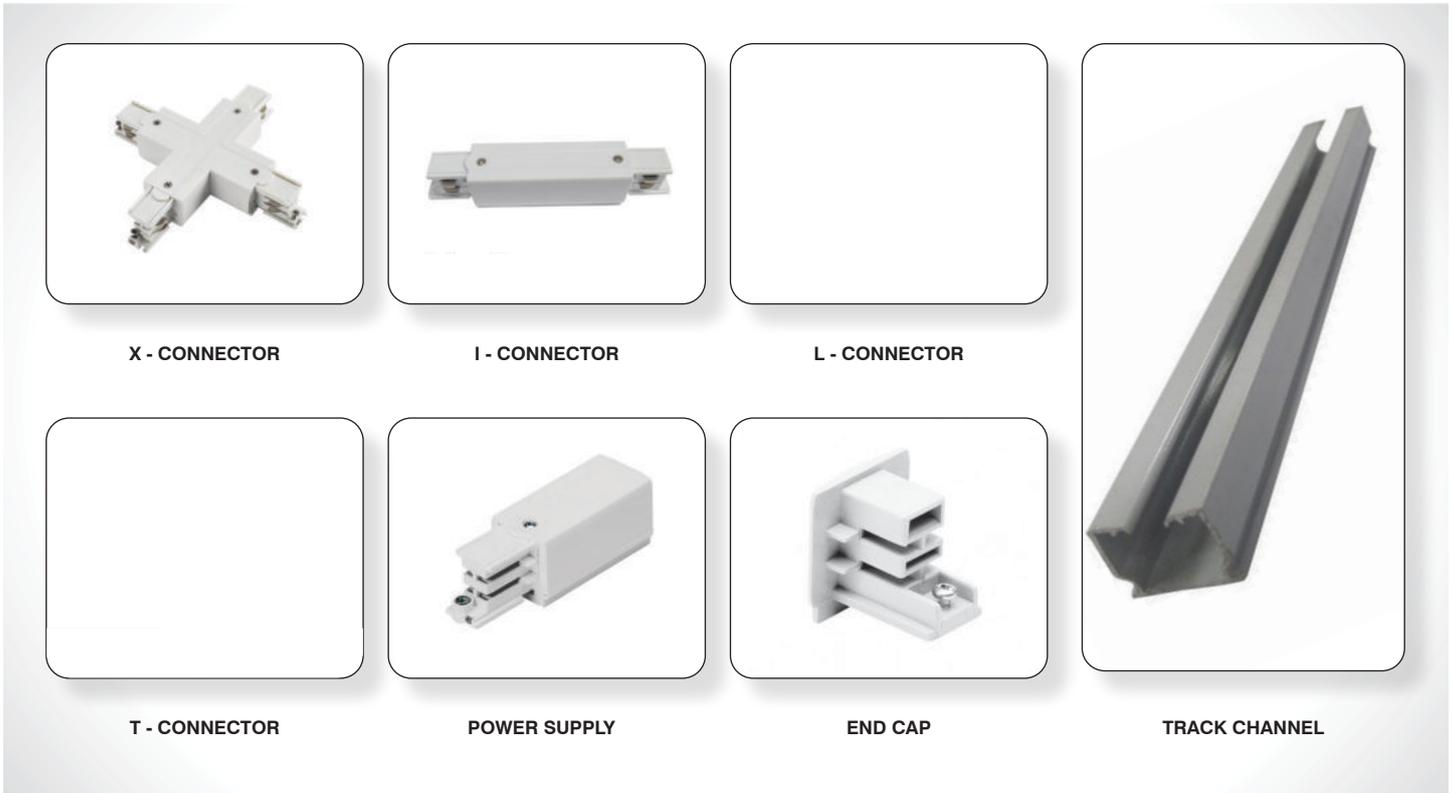

**X - CONNECTOR**

**I - CONNECTOR**

**L - CONNECTOR**

**T - CONNECTOR**

**POWER SUPPLY**

**END CAP**

**TRACK CHANNEL**

## ACCESSORIES

### Product Code

SL-TJ-133-X-Connector (3CKT) / 4 line  
SL-TJ-190-X-Connector (2CKT)

SL-TJ-133-I-Connector (3CKT) / 4 line  
SL-TJ-187-I-Connector (2CKT)

SL-TJ-133-L-Connector (3CKT) / 4 line  
SL-TJ-188-L-Connector (2CKT)

SL-TJ-133-T-Connector (3CKT) / 4 line  
SL-TJ-189-T-Connector (2CKT)

SL-TJ-135-Power Supply (3CKT) / 4 line  
SL-TJ-191-Power Supply (2CKT)

SL-TJ-134-End Cap (3CKT) / 4 line  
SL-TJ-192-End Cap (2CKT)

## TRACK CHANNEL


### Product Code

SL-TP-132-1mtr-3ckt / 4 line

SL-TP-123-2mtr-3ckt / 4 line

SL-TP-185-1mtr-2ckt

SL-TP-186-2mtr-2ckt

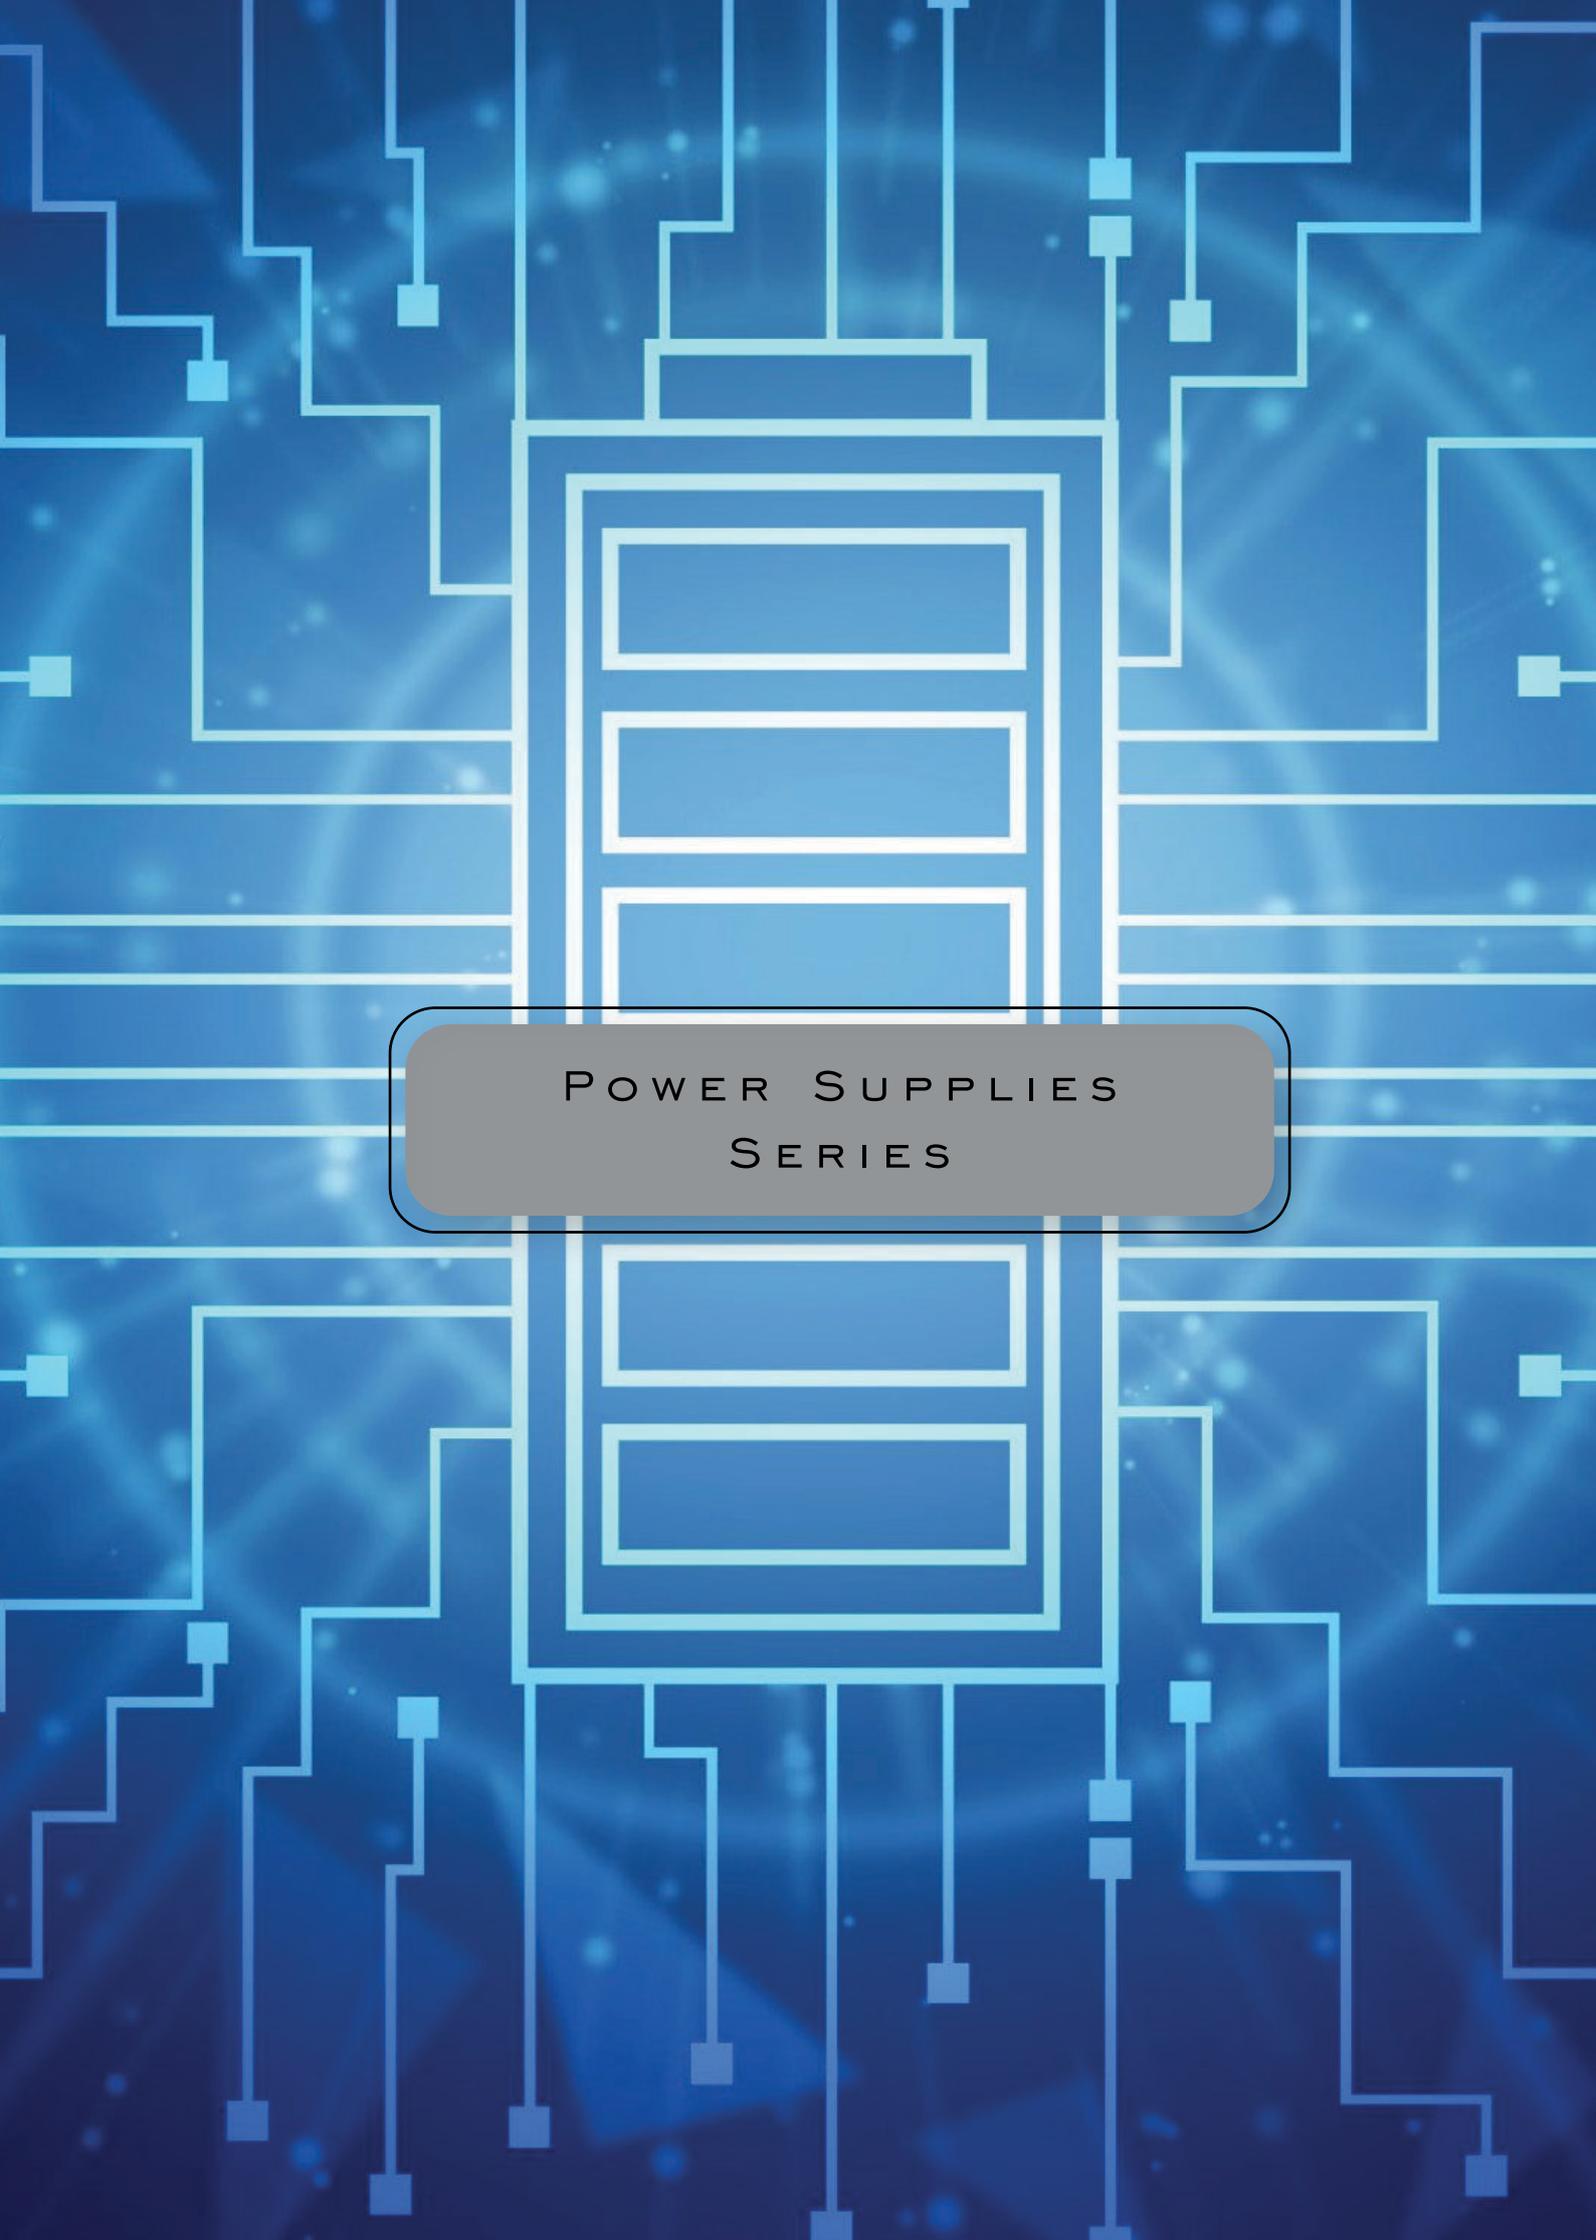

POWER SUPPLIES  
SERIES

## POWER SUPPLIES



**CONSTANT VOLTAGE  
POWER SUPPLIES  
( COMPACT SIZE )**



**WATERPROOF - POWER SUPPLIES**



**RGB CONTROLLER**



**MULTI FUNCTION REMOTE**



**TUNABLE STRIP CONTROLLER SERIES**

Constant Voltage Power Supplies - Compact Sizes - 12v	
Product Code	Dimension
SL-PS-E-112-12w	60mm x 30mm x (H)25mm
SL-PS-E-89-30w	84mm x 31mm x (H)27mm
SL-PS-E-90-36w	84mm x 33mm x (H)27mm
SL-PS-E-91-48w	108mm x 40mm x (H)33mm
SL-PS-E-92-60w	108mm x 40mm x (H)33mm
SL-PS-E-93-72w	108mm x 40mm x (H)33mm
SL-PS-E-94-96w	168mm x 45mm x (H)38mm
SL-PS-E-95-120w	168mm x 45mm x (H)38mm
SL-PS-E-96-150w	168mm x 45mm x (H)38mm
SL-PS-E-97-180w	188mm x 61mm x (H)46mm
SL-PS-E-98-240w	188mm x 61mm x (H)46mm

Waterproof - Power Supplies - 12v	
Product Code	Dimension
SL-WPS-44-30W	217mm x 29mm x (H)20mm
SL-WPS-45-60W	169mm x 520mm x (H)340mm
SL-WPS-46-100W	210mm x 685mm x (H)440mm
SL-WPS-48-150W	236mm x 132mm x (H)600mm
SL-WPS-66-200W	236mm x 132mm x (H)600mm

RGB-Controller & Amplifire	
Product Code	Dimension
SL-RGB-C-50-144W	217mm x 29mm x (H)20mm
SL-RGB-A-51-144W	169mm x 520mm x (H)340mm


## SMART DRIVER



**SMART DRIVER**



**SMART GATEWAY**



**SMART REMOTE**

SMART DRIVER	
Product Code	Dimension
SL-DR-BM-386-15w (Bluetooth Mesh)	100mm x (H)36mm x 23mm
SL-DR-BM-387-25w (Bluetooth Mesh)	116mm x (H)36mm x 23mm
SL-DR-BM-388-36w (ZigBee Mesh)	116mm x (H)36mm x 23mm
SL-DR-ZB-389-15w (ZigBee Mesh)	100mm x (H)36mm x 23mm
SL-DR-ZB-390-24w (ZigBee Mesh)	116mm x (H)36mm x 23mm

SMART GATEWAY & REMOTE	
Product Code	Dimension
SL-GT-ZB-393 (ZigBee Mesh)	62mm x (H)62mm x 42mm
SL-GT-BM-394 (Bluetooth Mesh)	82mm x (H)61mm x 58mm
SL-RT-BM-391 (Bluetooth Mesh)	REMOTE
SL-RT-ZB-392 (ZigBee Mesh)	REMOTE





### Disclaimer

The copyrights off all drawings, design and all the information contain in this catalogue shall remain the property of **Srishti Lighting** and shall not be used. published or copied in whole or part, without any written authorization from the **Srishti Lighting** .

**Srishti Lighting** has attempted to provide accurate and best of graphic information in this catalogue technical data figures are for guidance only, products illustration may differ from original.

**Srishti Lighting** reserves the right to make changes to the products, desings and specification in the interest of development or for further improvement.



[www.srishtilighting.com](http://www.srishtilighting.com)